


BUEXSO310ROW
BUEXSO315ROW
BUEXSO320FROW
BUEXSO320ROW
BUEXSO332ROW
BUEXSO410ROW
BUEXSO420ROW
BUEXSO432ROW
BUEXSO440ROW
BUEXSO450ROW
BUEXSO510ROW
BUEXSO520ROW
BUEXSO532ROW
BUEXSO540ROW
BUEXSO550ROW

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2



IP66 Extension Sockets

- Small Single Phase 10A to 20A (250V~).
- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~).
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~).
- 3 Flat Pin, 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Straight body format providing a more traditional design.
- Ribbed Lock ring on Small Single Phase versions for gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Internal cable clamp to support electrical connections.
- Chemical Resistant Orange and White for Acid Applications.
- Size 1 Single and Three Phase suits Smaller to Medium single or three phase loads.
- Size 2 Single and Three Phase suits Medium to Large single or three phase loads.
- Size 1 and Size 2 products have hinged Spring Loaded cover flaps for added safety and to keep dust & water out.
- Small Extension Sockets 10A and 20A accept cables from $\varnothing$ 6-12mm
- Size 1 Extension Sockets 10A and 20A accept cables from $\varnothing$ 12-16mm
- Size 2 Extension Sockets 32A, 40A and 50A accept cables from $\varnothing$ 11-16mm
- NOTE: ROW models use dark red thread rings and lock glands to represent the pH scale.



Pin & Volt	*Cat No. Extension Sockets	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size	Maximum Conductor Size (mm ²)	Minimum Cable Diameter (mm2)	Maximum Cable Diameter (mm2)	Gland Nut Thread (mm)	Matching Plug Straight / Angled
3 Pin 250V~	BUEXSO310ROW	10	3 Flat	A	2.4 x 4.5	6	6	12	M20 x 1.5	BUP310ROW
	BUEXSO315ROW	15	3 Flat	B	2.4 x 4.5	6	6	12	M20 x 1.5	BUP315ROW
	BUEXSO320FROW	20	3 Flat	E	2.4 x 4.5	6	6	12	M20 x 1.5	BUP320FROW
	BUEXSO320ROW	20	3 Round	G	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP320ROW / BUPA320ROW
	BUEXSO332ROW	32	3 Round	H	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP332ROW / BUPA332ROW
4 Pin 500V~	BUEXSO410ROW	10	4 Round	I	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP410ROW / BUPA410ROW
	BUEXSO420ROW	20	4 Round	J	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP420ROW / BUPA420ROW
	BUEXSO432ROW	32	4 Round	K	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP432ROW / BUPA432ROW
	BUEXSO440ROW	40	4 Round	L	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP440ROW / BUPA440ROW
	BUEXSO450ROW	50	4 Round	M	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP450ROW / BUPA450ROW
5 Pin 500V~	BUEXSO510ROW	10	5 Round	N	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP510ROW / BUPA510ROW
	BUEXSO520ROW	20	5 Round	O	$\varnothing$ 4.6	6	12	16	M25 x 1.5	BUP520ROW / BUPA520ROW
	BUEXSO532ROW	32	5 Round	P	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP532ROW / BUPA532ROW
	BUEXSO540ROW	40	5 Round	Q	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP540ROW / BUPA540ROW
	BUEXSO550ROW	50	5 Round	R	$\varnothing$ 6	16	11	16	M37 x 1.5	BUP550ROW / BUPA550ROW

All products accept Plug (BUP/BUPA), locking rings which prevents accidental removal and assists with maintaining the highest IP Rating and a spring loaded flap that seals out dust and moisture when not in use. Compatible with common pendant outlet kits.

Certification Number:

BUESO320ROW, BUESO332ROW, BUESO410ROW, BUESO420ROW, BUESO432ROW, BUESO440ROW, BUESO450ROW, BUESO510ROW, BUESO520ROW, BUESO532ROW, BUESO540ROW, BUESO550ROW: GMA-527928
BUEXSO310ROW, BUEXSO315ROW, BUEXSO320FROW: GMA-527862-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067


P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



BUEXSO310ROW
BUEXSO315ROW
BUEXSO320FROW
BUEXSO320ROW
BUEXSO332ROW
BUEXSO410ROW
BUEXSO420ROW
BUEXSO432ROW
BUEXSO440ROW
BUEXSO450ROW
BUEXSO510ROW
BUEXSO520ROW
BUEXSO532ROW
BUEXSO540ROW
BUEXSO550ROW

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 2 of 2




May 2026



IP66 Extension Sockets

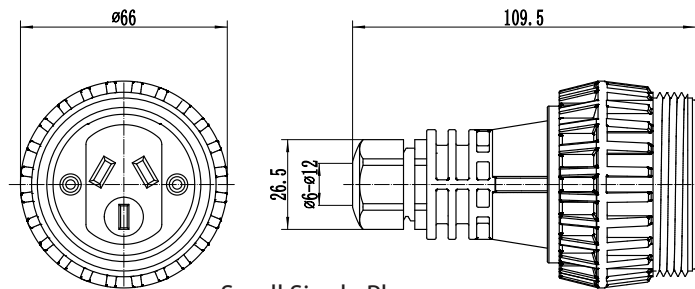

Small Single Phase

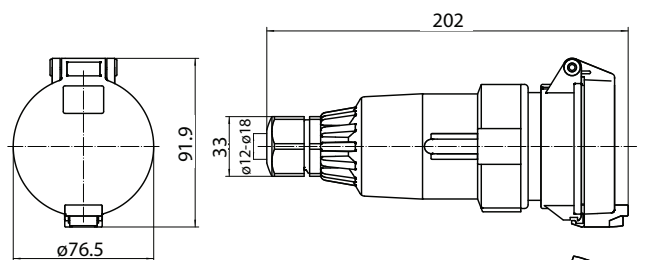

Size 1 Single & Three Phase

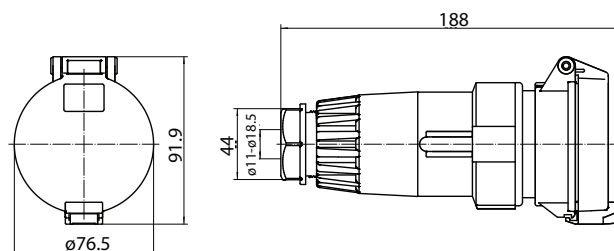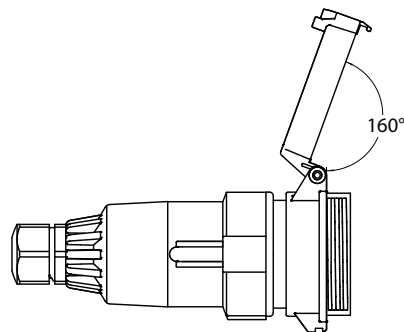

Size 2 Single & Three Phase

