


BUP310ROW
BUP310LROW
BUP315ROW
BUP320FROW
BUP320ROW
BUP332ROW
BUP410ROW
BUP420ROW
BUP432ROW
BUP440ROW
BUP450ROW
BUP510ROW
BUP520ROW
BUP532ROW
BUP540ROW
BUP550ROW
BUPA320ROW
BUPA332ROW
BUPA410ROW
BUPA420ROW
BUPA432ROW
BUPA440ROW
BUPA450ROW
BUPA510ROW
BUPA520ROW
BUPA532ROW
BUPA540ROW
BUPA550ROW

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2



IP66 Straight & Angled Plugs

- Small Single Phase 10A to 20A (250V~)
- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~)
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~)
- 3 Flat Pin, 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Straight body format providing a more traditional design.
- Angled format when space is limited, or to reduce plug & cable protrusion as cable is angled downwards.
- Ribbed Lock ring for secure fitment & gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Chemical Resistant Orange and White for Acid Applications.
- Insulated pins in accordance to AS/NZS3112 (BUP310ROW, BUP315ROW, BUP320FROW).
- Internal cable clamp to support electrical connections.
- Size 1 Single and Three Phase suits Smaller to Medium Loads.
- Size 2 Single and Three Phase suits Medium to Large loads.
- Small Extension Sockets 10A and 20A accept cables from $\varnothing$ 6 - 12mm
- Size 1 Extension Sockets 10A and 20A accept cables from $\varnothing$ 12 - 16mm
- Size 2 Extension Sockets 32A, 40A and 50A accept cables from $\varnothing$ 11 - 16mm
- NOTE: ROW models use dark red thread rings and lock glands to represent the pH scale.



Pin & Volt	Cat No. Straight Plug	Cat No. Angle Plug	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size (mm dia)	Maximum Conductor Size (mm ²)	Minimum Cable Diameter (mm ²)	Maximum Cable Diameter (mm ²)	Gland Nut Thread (mm)	Matching Socket/Combination
3 Pin 250V~	BUP310ROW	N/A	10	3 Flat	A	3.0	1.5HD	6	12	M20 x 1.5	BUSO310RO / BUSO310RW / BUC310RO / BUC310RW
	BUP310LROW	N/A	10	2 Flat 1 Round	C	3.0	1.5HD	6	12	M20 x 1.5	
	BUP315ROW	N/A	15	3 Flat	B	3.0	1.5HD	6	12	M20 x 1.5	BUSO315RO / BUSO315RW / BUC315RO / BUC315RW
	BUP320FROW	N/A	20	3 Flat	E	3.0	1.5HD	6	12	M20 x 1.5	BUSO320FRO / BUSO320FRW / BUC320FRO / BUC320FRW
	BUP320ROW	BUPA320ROW	20	3 Round	G	4.1	10	12	16	M25 x 1.5	BUSO320RO / BUSO320RW / BUC320RO / BUC320RW
4 Pin 500V~	BUP332ROW	BUPA332ROW	32	3 Round	H	4.1	10	11	16	M37 x 1.5	BUSO332RO / BUSO332RW / BUC332RO / BUC332RW
	BUP410ROW	BUPA410ROW	10	4 Round	I	4.1	10	12	16	M25 x 1.5	BUSO410RO / BUSO410RW / BUC410RO / BUC410RW
	BUP420ROW	BUPA420ROW	20	4 Round	J	4.1	10	12	16	M25 x 1.5	BUSO420RO / BUSO420RW / BUC420RO / BUC420RW
	BUP432ROW	BUPA432ROW	32	4 Round	K	4.1	10	11	16	M37 x 1.5	BUSO432RO / BUSO432RW / BUC432RO / BUC432RW
	BUP440ROW	BUPA440ROW	40	4 Round	L	4.1	10	11	16	M37 x 1.5	BUSO440RO / BUSO440RW / BUC440RO / BUC440RW
5 Pin 500V~	BUP450ROW	BUPA450ROW	50	4 Round	M	4.1	10	11	16	M37 x 1.5	BUSO450RO / BUSO450RW / BUC450RO / BUC450RW
	BUP510ROW	BUPA510ROW	10	5 Round	N	4.1	10	12	16	M25 x 1.5	BUSO510RO / BUSO510RW / BUC510RO / BUC510RW
	BUP520ROW	BUPA520ROW	20	5 Round	O	4.1	10	12	16	M25 x 1.5	BUSO520RO / BUSO520RW / BUC520RO / BUC520RW
	BUP532ROW	BUPA532ROW	32	5 Round	P	4.1	10	11	16	M37 x 1.5	BUSO532RO / BUSO532RW / BUC532RO / BUC532RW
	BUP540ROW	BUPA540ROW	40	5 Round	Q	4.1	10	11	16	M37 x 1.5	BUSO540RO / BUSO540RW / BUC540RO / BUC540RW
	BUP550ROW	BUPA550ROW	50	5 Round	R	4.1	10	11	16	M37 x 1.5	BUSO550RO / BUSO550RW / BUC550RO / BUC550RW

Certification Number:

BUP310ROW, BUP315ROW, BUP320FROW: GMA-520081-EA
BUP320ROW, BUP332ROW, BUP410ROW, BUP420ROW, BUP432ROW, BUP440ROW, BUP450ROW, BUP510ROW, BUP520ROW, BUP532ROW, BUP540ROW, BUP550ROW, BUPA320ROW, BUPA332ROW, BUPA410ROW, BUPA420ROW, BUPA432ROW, BUPA440ROW, BUPA450ROW, BUPA510ROW, BUPA520ROW, BUPA532ROW, BUPA540ROW, BUPA550ROW: GMA-52796

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067


P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



BUP310ROW
BUP310LROW
BUP315ROW
BUP320FROW
BUP320ROW
BUP332ROW
BUP410ROW
BUP420ROW
BUP432ROW
BUP440ROW
BUP450ROW
BUP510ROW
BUP520ROW
BUP532ROW
BUP540ROW
BUP550ROW
BUPA320ROW
BUPA332ROW
BUPA410ROW
BUPA420ROW
BUPA432ROW
BUPA440ROW
BUPA450ROW
BUPA510ROW
BUPA520ROW
BUPA532ROW
BUPA540ROW
BUPA550ROW

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


PAGE 2 of 2




IP66 Straight & Angled Plugs

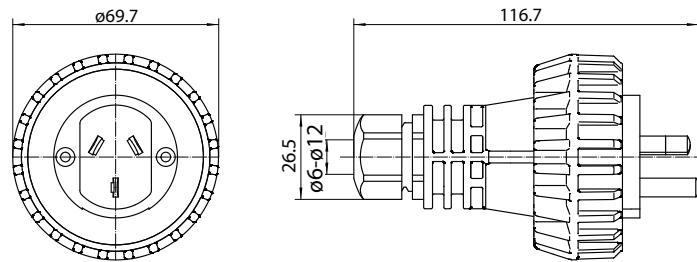

Small Single Phase

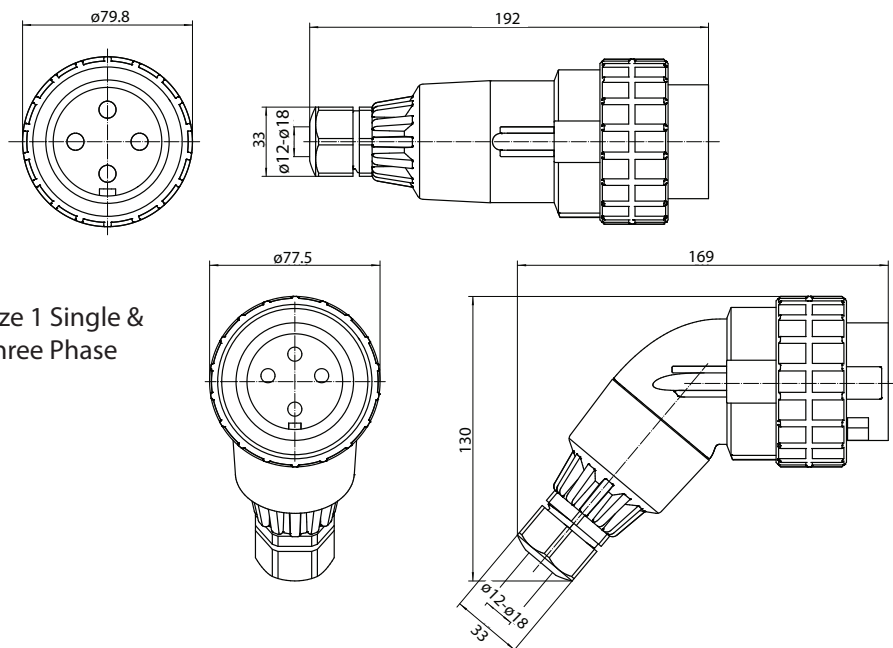

Size 1 Single &
Three Phase

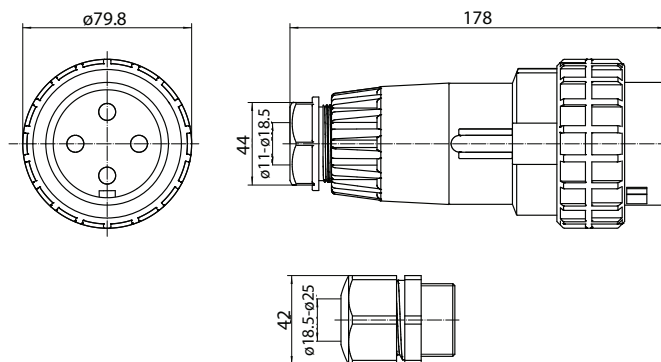

Size 2 Single &
Three Phase

