


BUP310RG
BUP310LRG
BUP315RG
BUP320FRG
BUP320RG
BUP332RG
BUP410RG
BUP420RG
BUP432RG
BUP440RG
BUP450RG
BUP510RG
BUP520RG
BUP532RG
BUP540RG
BUP550RG
BUPA320RG
BUPA332RG
BUPA410RG
BUPA420RG
BUPA432RG
BUPA440RG
BUPA450RG
BUPA510RG
BUPA520RG
BUPA532RG
BUPA540RG
BUPA550RG

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2



IP66 Straight & Angled Plugs

- Small Single Phase 10A to 20A (250V~)
- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~)
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~)
- 3 Flat Pin, 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Straight body format providing a more traditional design.
- Angled format when space is limited, or to reduce plug & cable protrusion as cable is angled downwards.
- Ribbed Lock ring for secure fitment & gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Chemical Resistant Grey for Alkaline Applications.
- Insulated pins in accordance to AS/NZS3112 (BUP310RG, BUP315RG, BUP320FRG).
- Internal cable clamp to support electrical connections.
- Size 1 Single and Three Phase suits Smaller to Medium Loads.
- Size 2 Single and Three Phase suits Medium to Large loads.
- Small Extension Sockets 10A and 20A accept cables from $\varnothing$ 6 - 12mm
- Size 1 Extension Sockets 10A and 20A accept cables from $\varnothing$ 12 - 16mm
- Size 2 Extension Sockets 32A, 40A and 50A accept cables from $\varnothing$ 11 - 16mm
- NOTE: RG models use purple thread rings and lock glands to represent the pH scale.

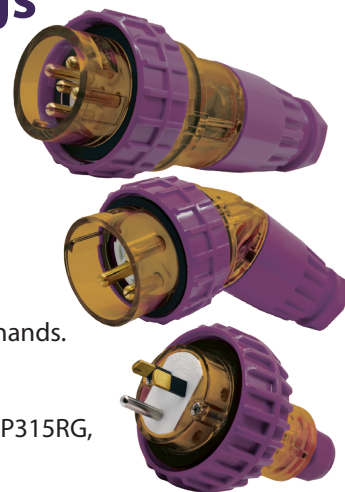

Pin & Volt	Cat No. Straight Plug	Cat No. Angle Plug	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size (mm dia)	Maximum Conductor Size (mm ²)	Minimum Cable Diameter (mm ²)	Maximum Cable Diameter (mm ²)	Gland Nut Thread (mm)	Matching Socket/Combination
3 Pin 250V~	BUP310RG	N/A	10	3 Flat	A	3.0	1.5HD	6	12	M20 x 1.5	BUSO310RG / BUC310RG
	BUP310LRG	N/A	10	2 Flat 1 Round	C	3.0	1.5HD	6	12	M20 x 1.5	
	BUP315RG	N/A	15	3 Flat	B	3.0	1.5HD	6	12	M20 x 1.5	BUSO315RG / BUC315RG
	BUP320FRG	N/A	20	3 Flat	E	3.0	1.5HD	6	12	M20 x 1.5	BUSO320FRG / BUC320FRG
	BUP320RG	BUPA320RG	20	3 Round	G	4.1	10	12	16	M25 x 1.5	BUSO320RG / BUC320RG
4 Pin 500V~	BUP332RG	BUPA332RG	32	3 Round	H	4.1	10	11	16	M37 x 1.5	BUSO332RG / BUC332RG
	BUP410RG	BUPA410RG	10	4 Round	I	4.1	10	12	16	M25 x 1.5	BUSO410RG / BUC410RG
	BUP420RG	BUPA420RG	20	4 Round	J	4.1	10	12	16	M25 x 1.5	BUSO420RG / BUC420RG
	BUP432RG	BUPA432RG	32	4 Round	K	4.1	10	11	16	M37 x 1.5	BUSO432RG / BUC432RG
	BUP440RG	BUPA440RG	40	4 Round	L	4.1	10	11	16	M37 x 1.5	BUSO440RG / BUC440RG
5 Pin 500V~	BUP450RG	BUPA450RG	50	4 Round	M	4.1	10	11	16	M37 x 1.5	BUSO450RG / BUC450RG
	BUP510RG	BUPA510RG	10	5 Round	N	4.1	10	12	16	M25 x 1.5	BUSO510RG / BUC510RG
	BUP520RG	BUPA520RG	20	5 Round	O	4.1	10	12	16	M25 x 1.5	BUSO520RG / BUC520RG
	BUP532RG	BUPA532RG	32	5 Round	P	4.1	10	11	16	M37 x 1.5	BUSO532RG / BUC532RG
	BUP540RG	BUPA540RG	40	5 Round	Q	4.1	10	11	16	M37 x 1.5	BUSO540RG / BUC540RG
	BUP550G	BUPA550RG	50	5 Round	R	4.1	10	11	16	M37 x 1.5	BUSO550RG / BUC550RG

Certification Number:

BUP310RG, BUP315RG, BUP320FRG: GMA-520081-EA
BUP320RG, BUP332RG, BUP410RG, BUP420RG, BUP432RG, BUP440RG, BUP440RG, BUP510RG, BUP520RG, BUP532RG, BUP540RG, BUP540RG, BUPA320RG, BUPA332RG, BUPA410RG, BUPA420RG, BUPA432RG, BUPA440RG, BUPA440RG, BUPA510RG, BUPA520RG, BUPA532RG, BUPA540RG, BUPA540RG: GMA-527969

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067


P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



BUP310RG
BUP310LRG
BUP315RG
BUP320FRG
BUP320RG
BUP332RG
BUP410RG
BUP420RG
BUP432RG
BUP440RG
BUP450RG
BUP510RG
BUP520RG
BUP532RG
BUP540RG
BUP550RG
BUPA320RG
BUPA332RG
BUPA410RG
BUPA420RG
BUPA432RG
BUPA440RG
BUPA450RG
BUPA510RG
BUPA520RG
BUPA532RG
BUPA540RG
BUPA550RG

See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


PAGE 2 of 2




IP66 Straight & Angled Plugs

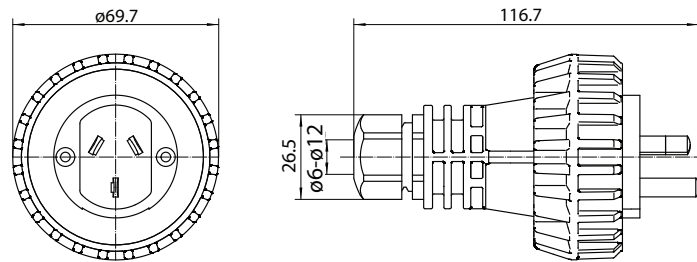

Small Single Phase

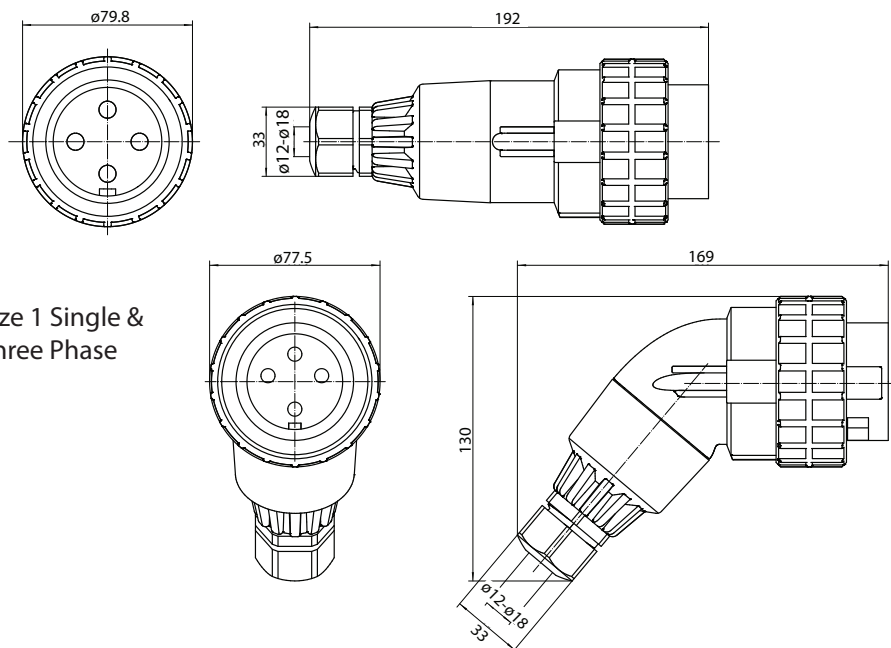

Size 1 Single &
Three Phase

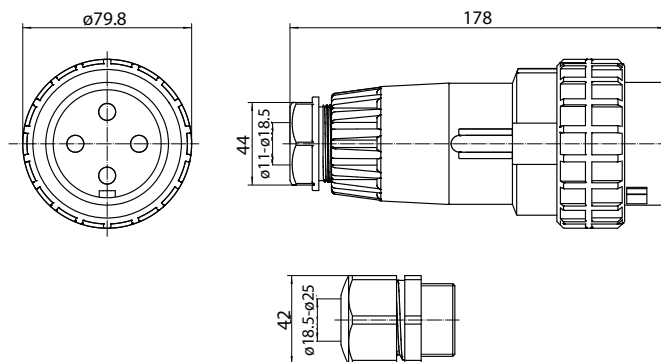

Size 2 Single &
Three Phase

