

## 90 Series

\*See Vintage catalogue for further detail



**PLEASE NOTE all SKUs  
are MADE TO ORDER  
within 5 business days,  
subject to availability.**



### Scan to view 90 Series Catalogue Pages

Includes all product codes and Images.



### Scan to view 90 Series Selection form

Includes all product codes  
and descriptions

#### Cleaning Guide:

1. Remove covers from switches, they are legal and safe with the covers removed it is not necessary to turn the power off.
2. Remove old lacquer with thinners or acetone applied with a soft cloth.
3. Repolish with brass/metal polish
4. Apply a clear metal lacquer which is available in spray packs.

## Pull Cord Switches

- 62 Diameter, 63mm High.
- Available in all 12 finishes.

PB - Polished Brass

PBM - Polished Brass Matt

CH - Chrome

SC - Satin Chrome

AB - Antique Brass

ABM - Antique Brass Matt

BB - Black Bronze


BBM - Black Bronze Matt

FB - Florentine Bronze

FBM - Florentine Bronze Matt

NB - Non-Relieved Bronze

NBM - Non-Relieved Bronze Matt



- Pull Cord Switch 10AX 250V~ M80
- 2 Way
- 4 terminal (Common, 1, 2, Loop terminals)
- Ø56mm
- Ø4.1mm terminal holes
- 10AX
- 2m Cord
- Mounting screw centres 36mm
- Easy mounting on timber or plaster surfaces
- Cord restraint Mechanism that enables easy cable length adjustment
- Replacement Parts also available
  - Replacement Parts such as Covers only, White, Brown or Black cord, Pine, Cedar or Black cord weight sold separately. Cords sold at 1 metre lengths.



C90PSWCWPN

Suitable for  
90 Series



C90PSWCWBK

Suitable for  
90 Series



C90PSWCWCD

Suitable for  
90 Series



C90PSWCWH

Suitable for  
90 Series




C90PSWCBK

Suitable for  
90 Series



C90PSWCBR

Suitable for  
90 Series

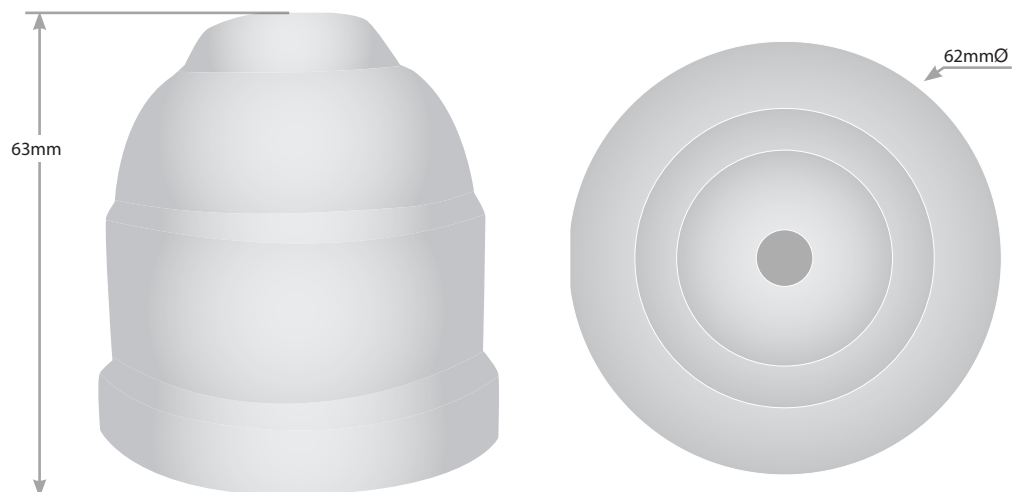

#### Certification Number:

GMA-505281 for HYSWPC Pull Cord Series.

#### GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 E: vintage@gsme.com.au

www.gsme.com.au



Data Specification Sheet  
July 2024