


BUEXSOA320
BUEXSOA332
BUEXSOA410
BUEXSOA420
BUEXSOA432
BUEXSOA440
BUEXSOA450
BUEXSOA510
BUEXSOA520
BUEXSOA532
BUEXSOA540
BUEXSOA550

See current catalogue for further detail

IP66 Extension Angled sockets

- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~).
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~).
- 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Ribbed Lock ring on Small Single Phase versions for gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Internal cable clamp to support electrical connections.
- Size 1 Single and Three Phase suits Smaller to Medium single or three phase loads.
- Size 2 Single and Three Phase suits Medium to Large single or three phase loads.
- Size 1 and Size 2 products have hinged Spring Loaded cover flaps for added safety and to keep dust & water out.
- Small Extension Sockets 10A and 20A accept cables from ø 6-12mm
 Size 1 Extension Sockets 10A and 20A accept cables from ø 12-16mm
 Size 2 Extension Sockets 32A, 40A and 50A accept cables from ø 11-16mm



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2



Pin & Volt	*Cat No. Extension Sockets	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size	Maximum Conductor Size (mm ²)	Minimum Cable Diameter (mm ²)	Maximum Cable Diameter (mm ²)	Gland Nut Thread (mm)	Matching Plug Straight / Angled	Matching Appliance Inlet
3 Pin 250V~	BUEXSOA320	20	3 Round	G	ø4.6	6	12	16	M25 x 1.5	BUP320/ BUPA320	BUAI320
	BUEXSOA332	32	3 Round	H	ø6	16	11	16	M37 x 1.5	BUP332/ BUPA332	BUAI332
4 Pin 500V~	BUEXSOA410	10	4 Round	I	ø4.6	6	12	16	M25 x 1.5	BUP410/ BUPA410	BUAI410
	BUEXSOA420	20	4 Round	J	ø4.6	6	12	16	M25 x 1.5	BUP420/ BUPA420	BUAI420
	BUEXSOA432	32	4 Round	K	ø 6	16	11	16	M37 x 1.5	BUP432/ BUPA432	BUAI432
	BUEXSOA440	40	4 Round	L	ø 6	16	11	16	M37 x 1.5	BUP440/ BUPA440	BUAI440
	BUEXSOA450	50	4 Round	M	ø 6	16	11	16	M37 x 1.5	BUP450/ BUPA450	BUAI450
5 Pin 500V~	BUEXSOA510	10	5 Round	N	ø4.6	6	12	16	M25 x 1.5	BUP510/ BUPA510	BUAI510
	BUEXSOA520	20	5 Round	O	ø4.6	6	12	16	M25 x 1.5	BUP520/ BUPA520	BUAI520
	BUEXSOA532	32	5 Round	P	ø 6	16	11	16	M37 x 1.5	BUP532/ BUPA532	BUAI532
	BUEXSOA540	40	5 Round	Q	ø 6	16	11	16	M37 x 1.5	BUP540/ BUPA540	BUAI540
	BUEXSOA550	50	5 Round	R	ø 6	16	11	16	M37 x 1.5	BUP550/ BUPA550	BUAI550

Certification Number:

BUESXOA320, BUESXOA332, BUESXOA410, BUESXOA420, BUESXOA432, BUESXOA440 BUESXOA450, BUESXOA510, BUESXOA520, BUESXOA532, BUESXOA540 BUESXOA550: GMA-527928

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsmc.com.au



www.gsmc.com.au




BUEXSOA320
BUEXSOA332
BUEXSOA410
BUEXSOA420
BUEXSOA432
BUEXSOA440
BUEXSOA450
BUEXSOA510
BUEXSOA520
BUEXSOA532
BUEXSOA540
BUEXSOA550

See current catalogue for further detail

IP66 Extension Angled Sockets

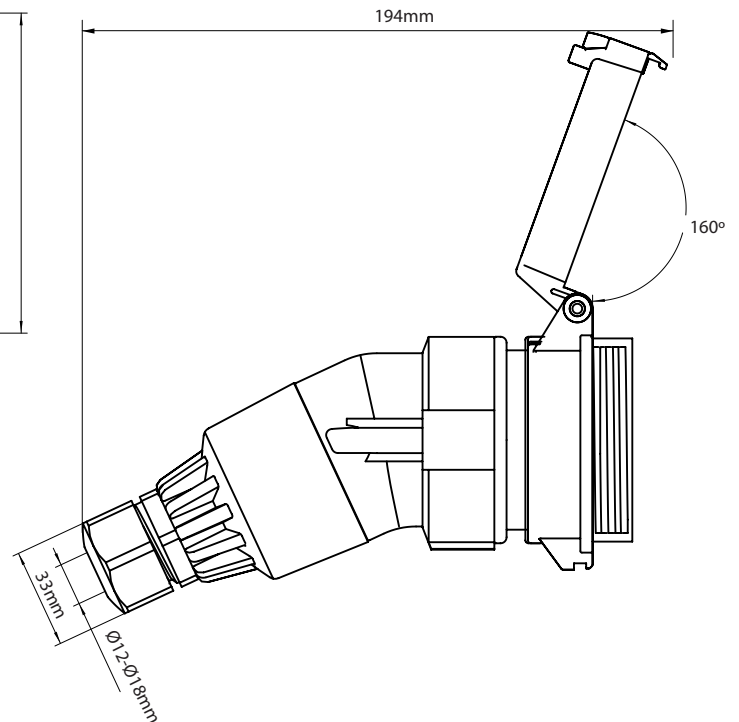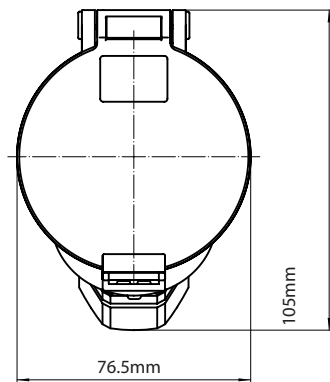

Size 1 Single &
Three Phase



Cleaning Guide:



Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 2 of 2

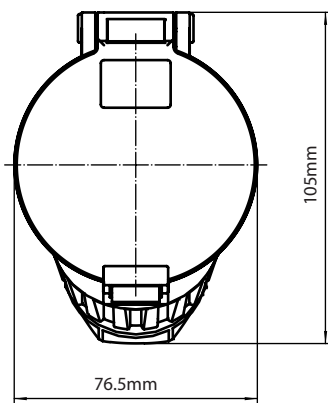

Size 2 Single &
Three Phase

