


BUSW1102 BUSW1202

See current catalogue for further detail

IP66 Heavy Duty 2-Way Switch Disconnectors

- **BUSW1102** 250V ~ 50Hz 10A SBL 250W M80 IP66 1 pole 2-way switch
- **BUSW1202** 250V ~ 50Hz 20A SBL 250W M80 IP66 1 pole 2-way switch
- AS/NZS3133 compliant
- Uses brass tunnel terminal that have the screws backed out for easier installation of cabling.
- Switches are single pole two way with looping terminal and suit 4 x 1.5mm² cables with 4.1mm bore.
- Slotted head terminal screws, and backed out for easy installation.
- Self-Ballasted load (SBL) LED rated to 250W
- Motor rating M80




Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

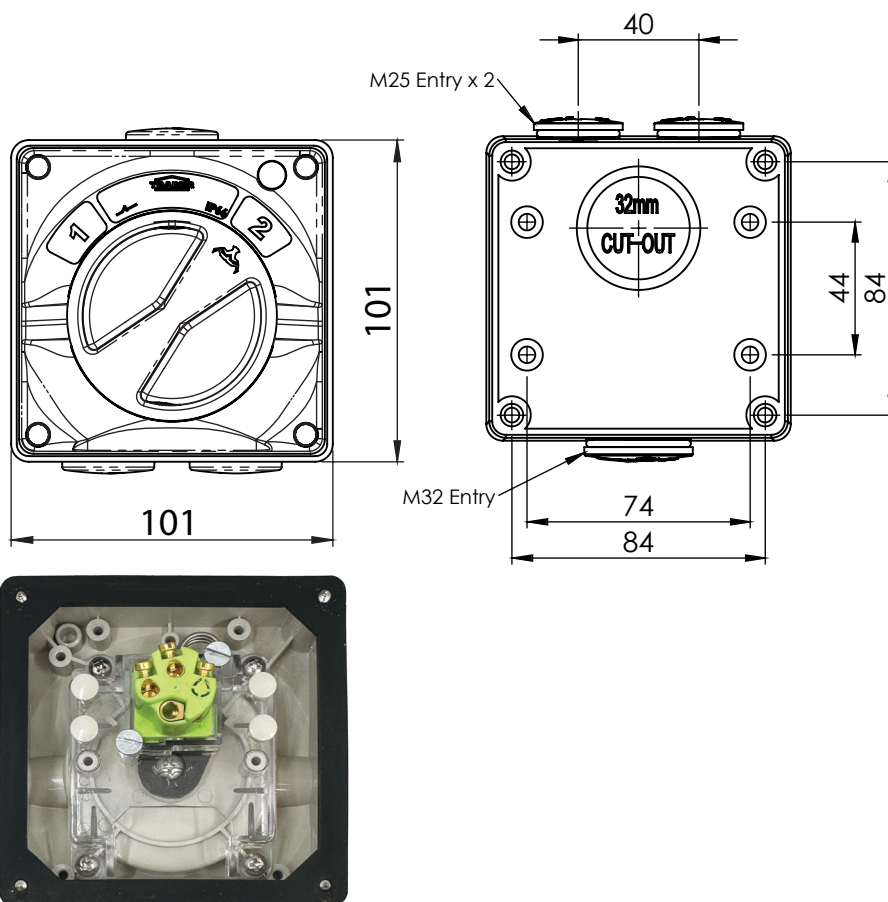

When ordering LESS ENCLOSURE add "LE" at end of catalogue number, ie "BUSW1102LE"

Certification Number:

GMA-529139-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

