

BESMOKEY10BW

*See current catalogue for further detail



Page 1 of 2

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

BESMOKEY10 Smoke Alarms come with a 10 Year Warranty from date of purchase. BESMOKEY10 Accessories are warranted for 7 Years from date of purchase. Proof of Purchase is required for Warranty Claims

– please see www.gsme.com.au for details regarding warranty claims.

Bear Photoelectric Smoke Alarm Wireless (Non Removable) Lithium Battery Only

- Photoelectric Sensing Technology.
- Activfire Listed.
- Complies with AS3786:2014.
- Main power source: Built-in DC3V Lithium battery (battery not replaceable).
- Interconnection Max. 40 alarms.
- Wireless distance Max. 100 metres in free field.
- Wireless Frequency test 433.42MHZ
- Suitable for Ceiling or Wall Mounting.
- Alarm volume $\geq 85\text{dB(A)}$ @ 3m complying with ISO8201 alarm pattern.
- Operating Temperature 0 °C - 40 °C.
- Maximum humidity for installation: < 93 % Relative Humidity.
- Central test & Activation Button.
- Red LED Alarm Status Indication.
- Insect Screen protects Sensing Chamber.
- Sleek Styling.
- The BESMOKEY10BW can also pair to BESMOKEY10 with BESMOKEY10WM installed.
- 10 Year warranty.

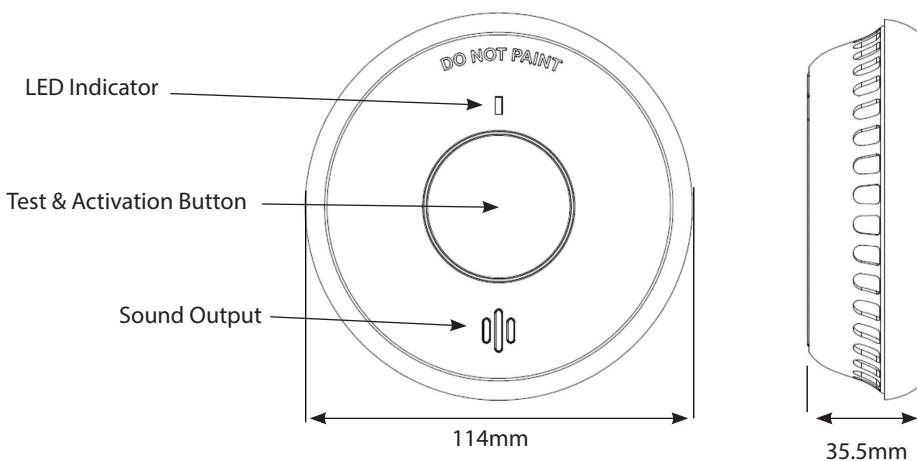

Catalogue Number	Description
BESMOKEY10BW	Smoke Alarm Wireless Interconnect Photoelectric Surface Mount Non Removable 3V DC Lithium 10 Year Battery Only

Certification Number:
Active Fire: afp-3735

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au
www.gmse.com.au



BESMOKEY10BW

*See current catalogue for further detail



Page 2 of 2

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

BESMOKEY10 Smoke Alarms come with a 10 Year Warranty from date of purchase. BESMOKEY10 Accessories are warranted for 7 Years from date of purchase. Proof of Purchase is required for Warranty Claims

– please see www.gsme.com.au for details regarding warranty claims.

Bear Photoelectric Smoke Alarm Wireless (Non Removable) Lithium Battery Only




BESMOKEY10BW can be used with BESMOKEY10REM.

BESMOKEY10BW is also net-workable with BESMOKEY10 with BESMOKEY10WM INSTALLED.

Example of a network using BESMOKEY10BW and BESMOKEY10 combined with hard wired and interconnected (using cable) with a single “master” alarm with the BESMOKEY10MW module fitted communicating with others in the system that are operating from the 10 Year Lithium battery.

NETWORK CONFIGURATION EXAMPLE

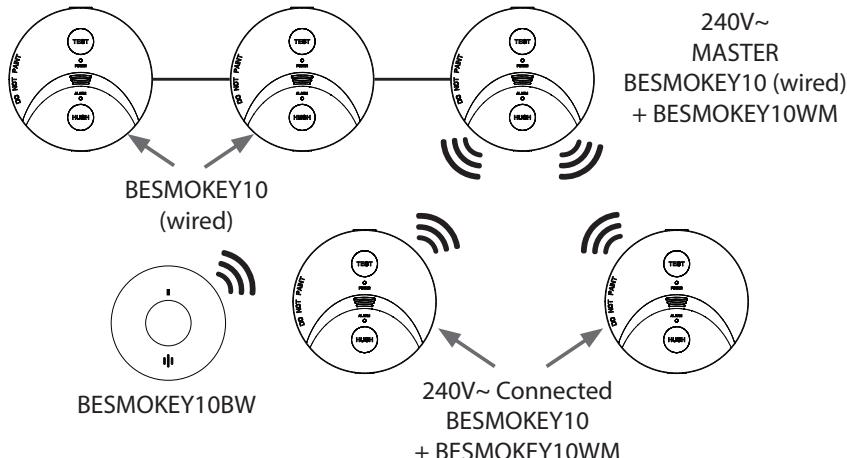

BESMOKEYREM can be installed on wireless network for convenient control.



Certification Number:
Active Fire: afp-3735

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au
www.gmse.com.au

