

COPP2G
COPPV2G
COPP152G
COPPV152G
COPPSW2G

*See current catalogue for further detail

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

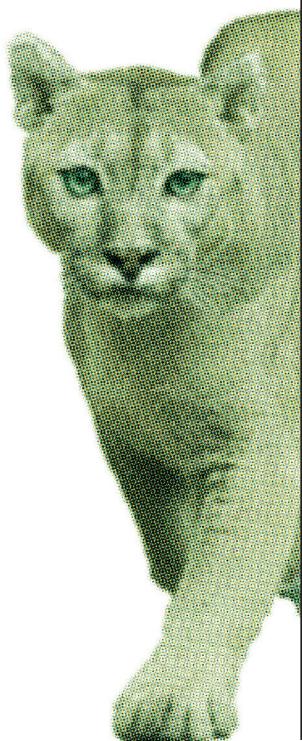

Cougar Range of Double Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Also available in Black. Please check availability.
- Typical example of size seen below:

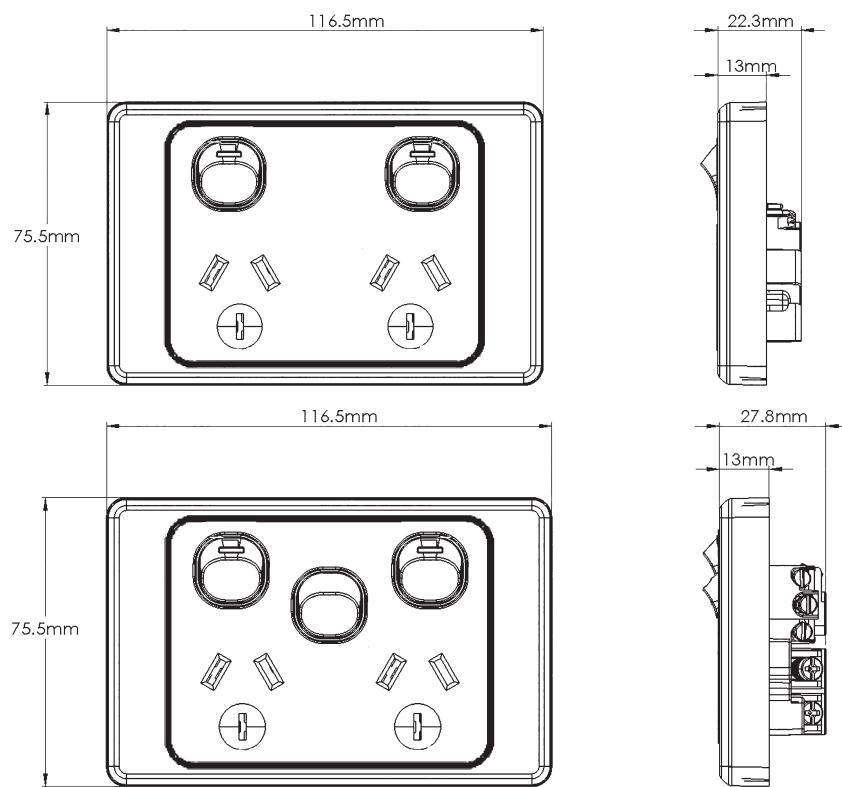

Catalogue Number	Description
COPP2G	Power Point Switched 2 Gang 10A 250V~
COPP2VG	Power Point Switched 2 Gang Vertical 10A 250V~
COPP152G	Power Point Switched 2 Gang 15A 250V~
COPPV152G	Power Point Switched 2 Gang Vertical 15A 250V~
COPPSW2G	Power Point Switched 2 Gang 10A 250V~ With Extra Switch 10AX/16A

When ordering BLACK product add "BK" at end of catalogue number, ie COPP2GBK



MEERKAT Switch Mechanisms are used for all switch plates.
 Please refer to [Meerkat Mech Matrix](#) for range compatibility.

Certification Number:

COPP2G: GMA-508660-EA

COPPSW2G: GMA-50120-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au

www.gmse.com.au

