

**MEPBEA**

**BUTTON CAPS:**

**MEBUMW**  
**MEBUMBK**  
**MEBUC**  
**MEBUCBK**  
**MEBUCSV**  
**MEBUCMW**  
**MEBUCMBK**

**Cleaning Guide:**

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



## Push Button Switching

### MEPBEA Push Button, Electronic On/Off Switch, 3-wire Amber LED FEATURES

- Soft touch push button ON/ OFF switch.
- Amber LED indicates device status.
- Returns to OFF after loss of power.
- Compatible with a wide range of load types including wire wound transformers & fan motors.
- Compatible with Trader and Clipsal® Style wall plates.
- Multi-Way Switching when used in conjunction with the **MEPBMWA** Multi-Way Remote Dimmer & ON/OFF Push Button.
- Supplied with MEBU Gloss White & Gloss Black buttons, suits Puma, Cougar & Flat Cat gloss finishes.

**OPERATING CONDITIONS**

- |                             |  |
|-----------------------------|--|
| • Operating Voltage:        | 230 – 240V a.c. 50Hz   |
| • Maximum Load:             | 1200W / 500VA (see table below)  |
| • Maximum Current Capacity: | 5A   |
| • Terminals:                | Screw Terminals suit 0.5mm <sup>2</sup> to 1.5mm <sup>2</sup> stranded cable (bootlace terminal recommended) |
| • Operating Temperature:    | 0 to +50 °C  |
| • Compliance Standard:      | CISPR15, AS/NZS 3100, AS/NZS 60669.2.1   |

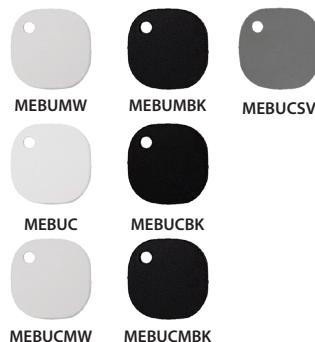
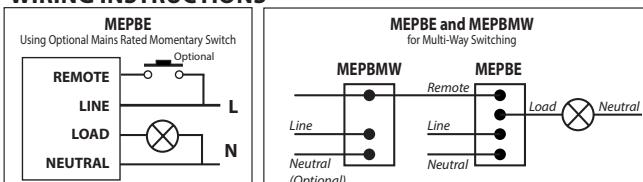
*Note: Operation at temperature, voltage or load outside of the specifications may cause permanent damage to the unit.*

**LOAD COMPATIBILITY**

LOAD TYPE	COMPATIBILITY
Incandescent / 240V Halogen	1200W
Fluorescent Tube with Electronic Ballast	500VA
Fluorescent Tube with Iron Core Ballast	500VA
Compact Fluorescent	500VA
Electronic Transformer	500VA
LED	500VA
Wirewound Transformer	500VA
Fan Motors	500VA
Heating Elements	1200W

**WHITE, BLACK, SILVER, MATT WHITE & MATT BLACK BUTTONS AVAILABLE:**

MEBUMW & MEBUMBK (curved button for Flat Cat),  
 MEBUC & MEBUCBK (flat button for Leopard and Snow Leopard),  
 MEBUCSV (flat button for Snow Leopard Silver finishes)  
 MEBUCMW & MEBUCMBK (flat button for Clouded Leopard matt finishes)


**WIRING INSTRUCTIONS**


Catalogue Number	Description
MEPBEA	Push Button, Electronic On/Off Switch, 3-wire Amber LED
MEBUMW	Curved Button for MEPBE, MEPBMW & DIMPBD, for use with Flat Cat Matt White
MEBUMBK	Curved Button for MEPBE, MEPBMW & DIMPBD for use with Flat Cat Matt Black
MEBUC	Flat Button Gloss White for DIMPBD, MEPBE, MEPBMW for use & best aperture fit with Leopard & Snow Leopard White.
MEBUCBK	Flat Button Gloss Black for DIMPBD, MEPBE, MEPBMW use & best aperture fit with Leopard & Snow Leopard Black.
MEBUCMW	Flat button for MEPBE, MEPBMW & DIMPBD for use & best aperture fit with Clouded Leopard Matt White. Not suitable for Flat Cat.
MEBUCMBK	Flat button for MEPBE, MEPBMW & DIMPBD for use & best aperture fit with Clouded Leopard Matt Black. Not suitable for Flat Cat.

\*The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd. and used for reference only.

**Certification Number:** GMA-517635-EA

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
 P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au  
[www.gmse.com.au](http://www.gmse.com.au)

