

# Multi Purpose Switch

## 4 Button



### Data Sheet

#### Features

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm<sup>2</sup> cable.
- Soft touch button control.
- Neutral connection not required (2 wire); connect neutral if available (3 wire).
- Auto sensing of 3 wire and 2 wire (no neutral mode).
- LED indicator displays on/off state.
- Covers, plates and buttons are made from UV stabilised polycarbonate to avoid discolouring.
- Silverfish antenna technology.
- 2 year warranty.

- Bluetooth mesh connectivity with each device acting as a repeater.
- Real time energy use in watts & dollars.
- Automatic schedules.
- Auto off timers.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant.\*

*Learn more at [www.zimi.life](http://www.zimi.life)*



**PMMPS4**




**PMMPS4BK**

#### Specifications

Product Code	Colour	Description	
PMMPS4	White	Powermesh Multi Purpose Switch 4 Button	<ul style="list-style-type: none"> <li>• <b>Motor Rating:</b> M40</li> <li>• <b>3 wire with Neutral:</b> 240V~ 5AX max per channel, 10AX max load.</li> <li>• <b>2 wire without Neutral:</b> 240V~ 5AX max per channel, channel 1 is 5A only.</li> </ul>
PMMPS4BK	Black		

**Always use a Neutral wire where possible.** When operating without a neutral connected, a small amount of power is used via LOAD 1 when switched off. This may in some instances result with lights not completely turning off. **Dimmable** loads might be fixed by increasing to at least 2 lights with a load >10W. **Non-Dimmable** loads may require a bypass/load correction device fitted if the load is insufficient.

#### Dimensions (mm)

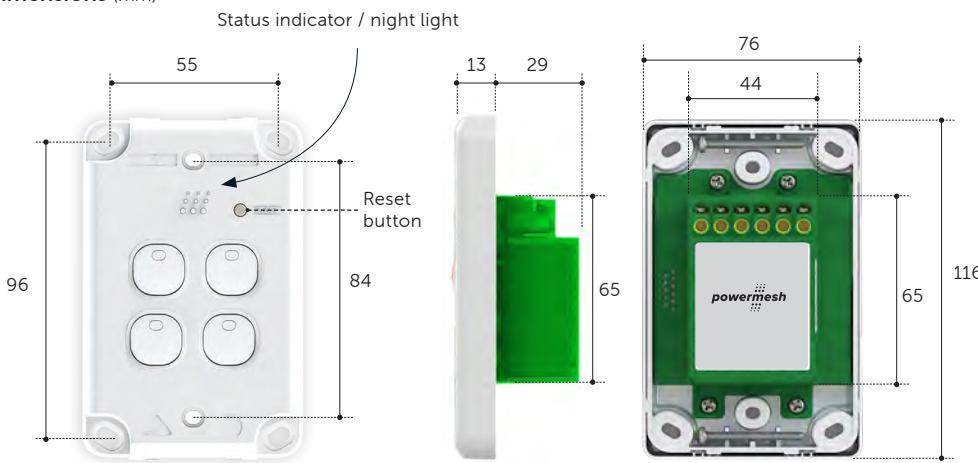

#### Compatible load types\*

	LED
	Incandescent
	Fluorescent
	CFLs

	Electronic transformers
	Standard iron core & toroidal transformers
	Exhaust fans small motors

#### Standards Approval:

AS/NZ60669.2.1 & AS/NZS CISPR15

**Certification Number:**  
GMA-506939-EA



**Download Zimi**  
Scan the code with  
your phone camera  
to download.



#### \* Zimi Cloud Connect

Enjoy the complete  
experience of all  
your Zimi devices  
with full functionality,  
reliable connectivity  
and energy history.



14 Millennium Circuit, Helensvale,  
QLD 4212 Australia. [www.zimi.life](http://www.zimi.life)

Need help?  
email [support@zimi.life](mailto:support@zimi.life)  
visit <https://support.zimi.life>