

Multi Purpose Switch

4 Button Horizontal



Data Sheet

Features

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Switch terminals have 4mm bore to suit 1.5mm² cable.
- Soft touch button control.
- Neutral connection not required (2 wire); connect neutral if available (3 wire).
- Auto sensing of 3 wire and 2 wire (no neutral mode).
- LED indicator displays on/off state.
- Covers, plates and buttons are made from UV stabilised polycarbonate to avoid discolouring.
- Silverfish antenna technology.
- 2 year warranty.

- Bluetooth mesh connectivity with each device acting as a repeater.
- Real time energy use in watts & dollars.
- Automatic schedules.
- Auto off timers.
- Power outage recovery.
- Night light on/off and auto dim.
- Multi way switching of other Zimi devices using Behaviour Link.
- Voice control with your favourite voice assistant.*

Learn more at www.zimi.life

Specifications


Product Code	Colour	Description
PMMPS4H	White	Powermesh Multi Purpose Switch 4 Button Horizontal
PMMPS4HBK	Black	4 Button Horizontal

Motor Rating: M40

- **3 wire with Neutral:** 240V~ 5AX max per channel, 10AX max load.
- **2 wire without Neutral:** 240V~ 5AX max per channel, channel 1 is 5A only.

Always use a Neutral wire where possible. When operating without a neutral connected, a small amount of power is used via LOAD 1 when switched off. This may in some instances result with lights not completely turning off. **Dimmable** loads might be fixed by increasing to at least 2 lights with a load >10W. **Non-Dimmable** loads may require a bypass/load correction device fitted if the load is insufficient.

Dimensions (mm)

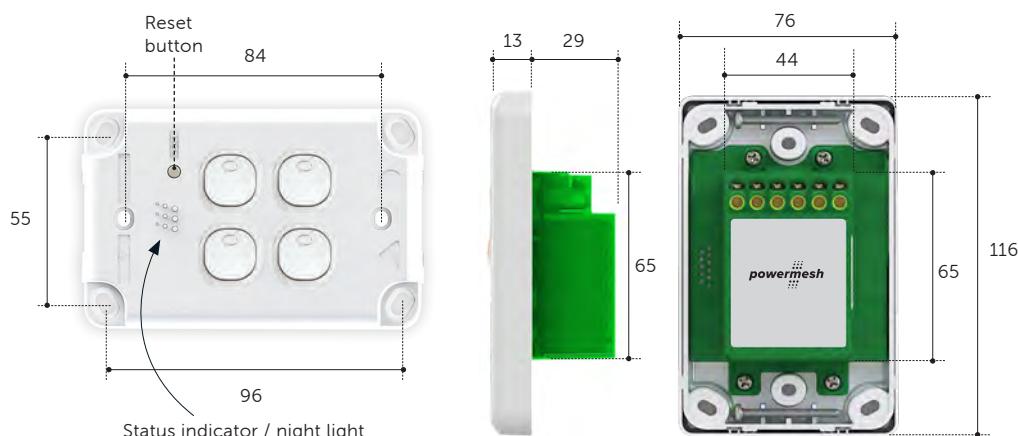

Compatible load types*

	LED
	Incandescent
	Fluorescent
	CFLs
	Electronic transformers
	Standard iron core & toroidal transformers
	Exhaust fans small motors



PMMPS4H



PMMPS4HBK

Standards Approval:
AS/NZ60669.2.1 & AS/NZS CISPR15

Certification Number:
GMA-506936-EA



Download Zimi
Scan the code with
your phone camera
to download.



* Zimi Cloud Connect

Enjoy the complete
experience of all
your Zimi devices
with full functionality,
reliable connectivity
and energy history.



14 Millennium Circuit, Helensvale,
QLD 4212 Australia. www.zimi.life

Need help?

email support@zimi.life
visit <https://support.zimi.life>