

PUSWVA1GVP PUSWVA2GVP

*See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.




Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.




Do not wash the cover plates in water over 60°C.

Puma Vandal Proof Range of Architrave Switches

- Switches are rated 10AX/16A 250V~ and approved to AS/NZS60669-1
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black also stocked - please check availability.
- Typical example of size seen below:

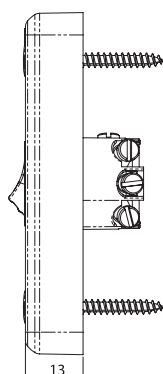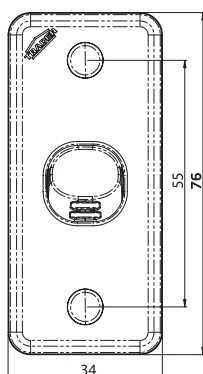

example of
cutting template
PUSWVA1GVP

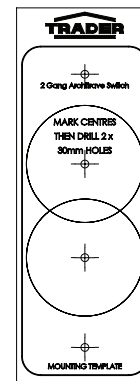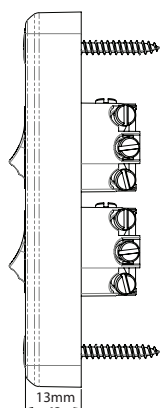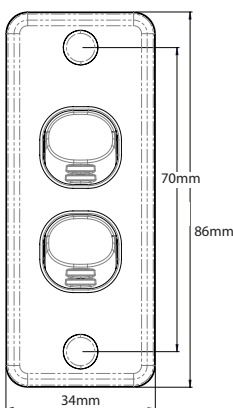

example of
cutting template
PUSWVA2GVP

Catalogue Number	Description
PUSWVA1GVP	Switch Vertical Architrave 1 Gang 10AX/16A 250V ac Vandal Proof
PUSWVA2GVP	Switch Vertical Architrave 2 Gang 10AX/16A 250V ac Vandal Proof

When ordering BLACK product add "BK" at end of catalogue number, ie PUSWVA1GVPBK

MEERKAT 

MEERKAT Switch Mechanisms are used for all switch plates.
Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number: GMA-508434-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
June 2025