

SNPP2USBAUWW SNPP2USBAUBB

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. Do not use an abrasive cloth as it may scratch the plastic.


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



Snow Leopard Range of Dual USB Charger Power Points

- Sockets rated to 10A 250V a.c.
- Warm white LED indicators to show power on status.
- USB outlets rated to 3.4A max total at 5V.
- Auto-Switched socket outlet switches active upon plug insertion/withdrawal.
- Each electrical socket contains shutters activated from the neutral pin.
- The USB circuit is integrated with the socket outlet and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits standard mounting accessories with 84mm centres.
- Terminals suit 3 x 2.5mm².
- Recommended for phone use or small tablet only, larger devices such as laptops with USB C connections require much greater output.
- Standard colour is White, White. Also available in Black, Black - please check availability.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- Typical example of size seen below:

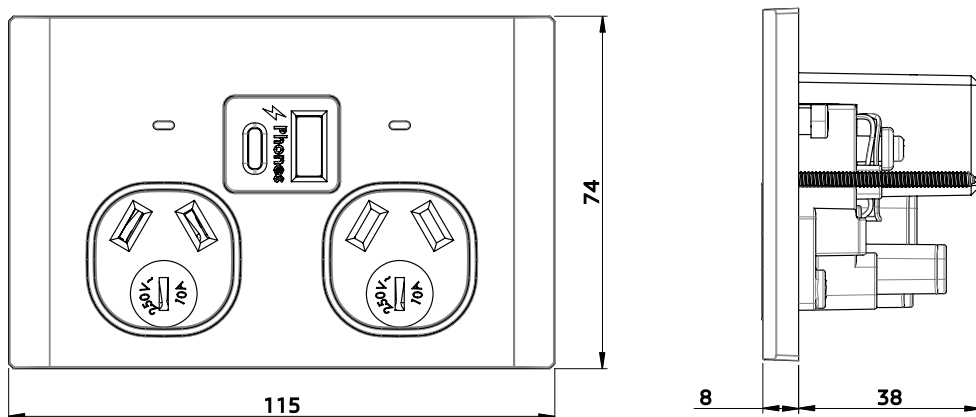

Catalogue Number	Description
SNPP2USBAUWW	Power Point Fully Integrated Dual USB Charger (Type A & C) Auto-Switched, 10A 250V~ White Cover, White Grid
SNPP2USBAUBB	Power Point Fully Integrated Dual USB Charger (Type A & C) Auto-Switched, 10A 250V~ Black Cover, Black Grid

Certification Number:
TBC

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
April 2021