



## CLPP2GMW CLPPSW2GMW CLPPV2GMW

See current catalogue for further detail

### Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

## Double Power Points

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm<sup>2</sup> cable. Switch terminals have 4.1mm suit 4 x 1.5mm<sup>2</sup>
- Combination head screws for the power point terminals
- Uses 'Cat Flap' screw covers for IP rating mounting screws
- Dolly indicator colour green
- Power points approved to AS/NZS3112
- Standard colour is matt white. Also available in matt black - please check availability.
- Typical example of size seen below:

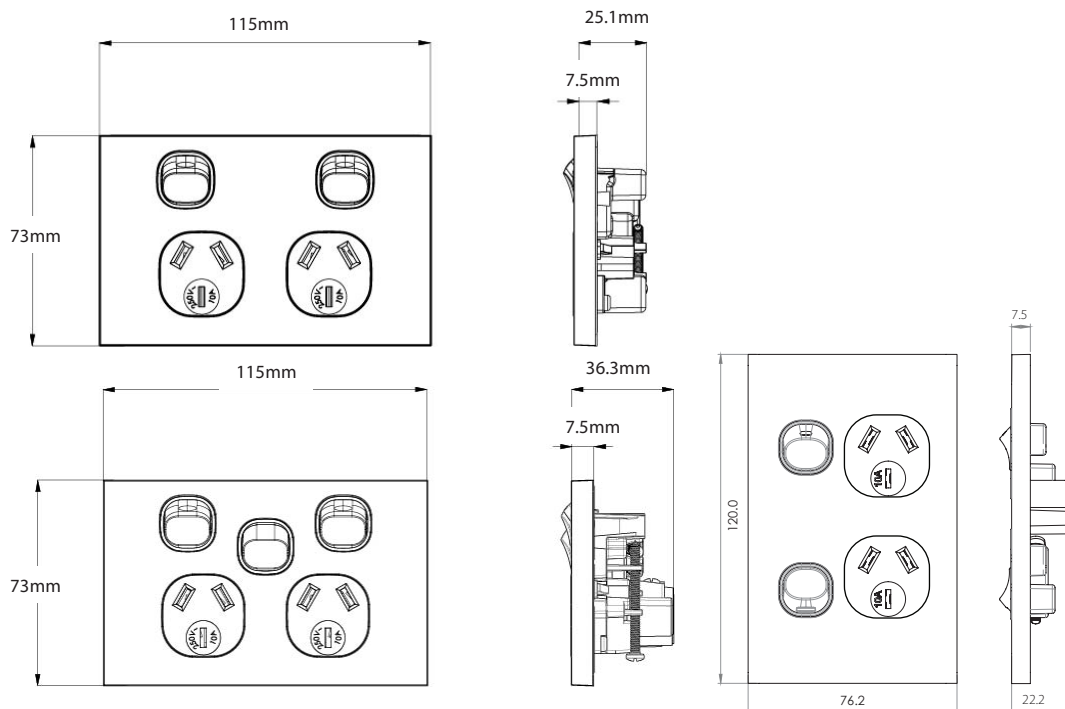

| Catalogue Number | Description                                                                             |
|------------------|-----------------------------------------------------------------------------------------|
| CLPP2GMW         | Power Point Switched 2 Gang 10A 250V ac Matt White                                      |
| CLPPSW2GMW       | Power Point Switched 2 Gang 10A 250V ac with Removable Extra Switch 16AX 20A Matt White |
| CLPPV2GMW        | Power Point Switched Vertical 2 Gang 10A 250V ac Matt White                             |

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLPP2GMBK

### Certification Number:

GMA-500348-EA

GMA-500347-EA

**GSM Electrical (Australia) Pty Ltd**

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

