



CLSWVA1GMW CLSWVA2GMW

See current catalogue for further detail


Architrave Switches

- Switches are rated 16AX/20A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is matt white. Also available in matt black - please check availability.
- Approved to AS/NZS60669-1
- Typical example of size seen below:

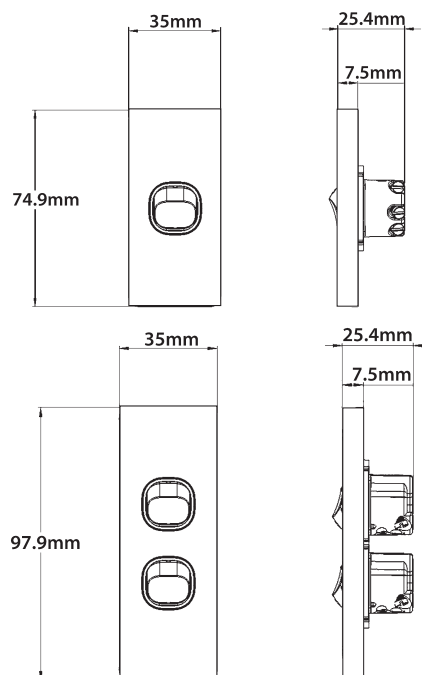

example of
cutting template
supplied

CLSWVA1GMW



example of
cutting template
supplied

CLSWVA2GMW

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
CLSWVA1GMW	Switch Vertical Architrave 1 Gang 16AX 20A 250V ac Matt White
CLSWVA2GMW	Switch Vertical Architrave 2 Gang 16AX 20A 250V ac Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLSWVA1GMBK

Certification Number:

GMA-507879-EA

GSM Electrical (Australia) Pty Ltd

5-9 Rundle Street, Kent Town SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

