


**CBAPS20L
CBAPS25L
CBAPS32L
CBAPS40L**

*See current catalogue for further detail



Cobra Range of Conduit Connector Adaptors

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Connector type: Plain to threaded
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm, 25mm, 32mm & 40mm tube
- Standards: AS/NZS61386.1:2015;
IEC 61386-1: 2008 Part 1: General requirements;
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

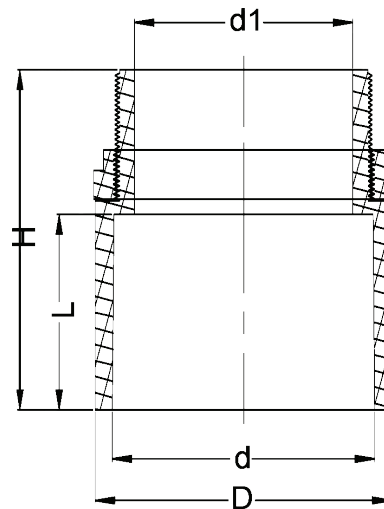

Catalogue Number	Size Spec (mm)	D	d	L	H	d1
CBAPS20L	20	24.8	20.0	21.0	35.7	13.0
CBAPS25L	25	31.8	25.0	23.2	40	19.1
CBAPS32L	32	37.3	32.3	29.5	25.7	49.4
CBAPS40L	40	45.4	40.2	29.9	52	33.4

Catalogue Number	Description
CBAPS20L	Adaptor Plain to Screwed 20mm with Lock Ring PVC Grey
CBAPS25L	Adaptor Plain to Screwed 25mm with Lock Ring PVC Grey
CBAPS32L	Adaptor Plain to Screwed 32mm with Lock Ring PVC Grey
CBAPS40L	Adaptor Plain to Screwed 40mm with Lock Ring PVC Grey

Certification Number:
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
October 2025