


**CBCP20
CBCP25
CBCP32
CBCP40**

*See current catalogue for further detail



Cobra Range of Conduit Connector Plain Couplings

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm, 25mm, 32mm & 40mm tube
- Standards: AS/NZS61386.1:2015;
IEC 61386-1: 2008 Part 1: General requirements;
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

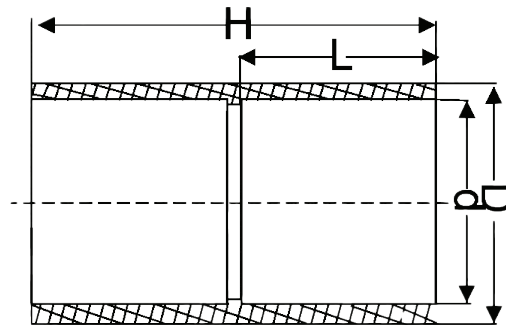

Catalogue Number	Size Spec (mm)	D	d	L	H
CBCP20	20	24.0	20.1	20.3	42.0
CBCP25	25	29.0	25.2	25.2	52.0
CBCP32	32	36.3	32.2	27.7	57.8
CBCP40	40	46.3	40	39	80

Catalogue Number	Description
CBCP20	Coupling 20mm PVC Grey
CBCP25	Coupling 25mm PVC Grey
CBCP32	Coupling Plain to Plain 32mm PVC Grey
CBCP40	Coupling Plain to Plain 40mm PVC Grey

Certification Number:
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsm.com.au
www.gsm.com.au



Data Specification Sheet
October 2025