


**CBCPF20
CBCPF25
CBCPF32**

*See current catalogue for further detail



Cobra Range of Conduit Connector Plain Flexible Couplings

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm, 25mm & 32mm tube
- Standards: AS/NZS61386.1:2015;
IEC 61386-1: 2008 Part 1: General requirements;
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

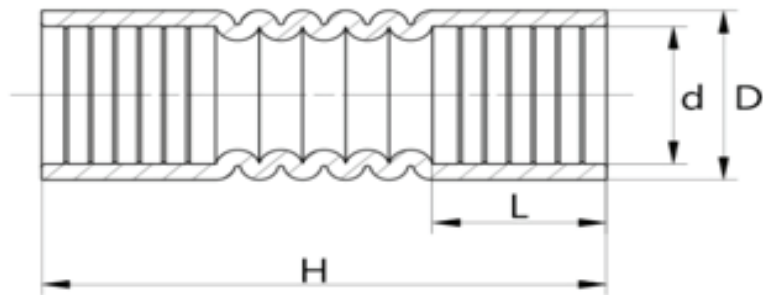

Catalogue Number	Size Spec (mm)	D	d	L	H
CBCPF20	20	24.4	20	21	72
CBCPF25	25	30	24.4	25	81
CBCPF32	32	37.6	32	29	100

Catalogue Number	Description
CBCPF20	Coupling Plain to Plain Flexible 20mm PVC Grey
CBCPF25	Coupling Plain to Plain Flexible 25mm PVC Grey
CBCPF32	Coupling Plain to Plain Flexible 32mm PVC Grey

Certification Number:
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
October 2025