

NEW CODE	OLD CODE
CBJBR1HD20	CBJBR1MD20
CBJBR1HD25	CBJBR1MD25
CBJBR2HD20	CBJBR2MD20
CBJBR2HD25	
CBJBR3HD20	CBJBR3MD20
CBJBR3HD25	
CBJBR4HD20	
CBJBR4HD25	

Trader Cobra conduit fittings have now been tested and approved for HD applications as per IEC 61386-1: 2008+AMD1: 2017 & IEC 61386-21:2021.

GSM Electrical Trader reserves the right to maintain the MD part codes of previous batches of Trader Cobra Conduit fittings. These products are made and certified to the same standard as their new HD counterparts.




Page 1 of 2




Cobra Range of Junction Boxes

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 20mm & 25mm tube
- Heavy Duty
- Standards: AS/NZS IEC 60670-1:2015 Boxes and enclosures for electrical accessories for household and similar fixed electrical installations -- Part 1: General requirements.

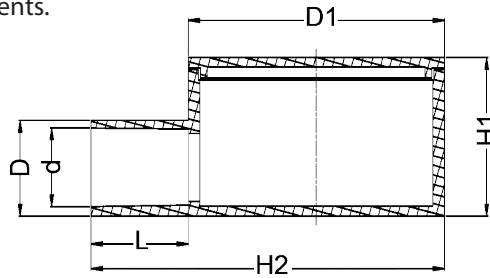

Catalogue Number	Size Spec (mm)	D	d	L	D1	H1	H2
CBJBR1HD20	20	24.40	20.25	20.00	34.51	41.00	85
CBJBR1HD25	25	29.40	25.25	25.00	38.81	41.00	90

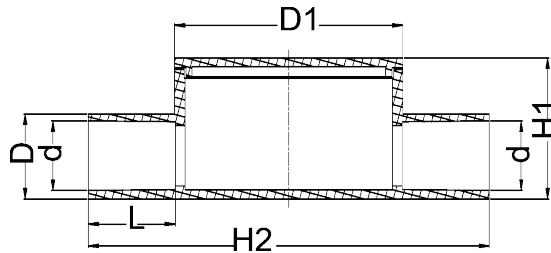

Catalogue Number	Size Spec (mm)	D	d	L	D1	H1	H2
CBJBR2HD20	20	24.40	20.25	20.00	65.60	41.00	105
CBJBR2HD25	25	29.4	25.25	25	65.6	41	115

Catalogue Number	Description
CBJBR1HD20	Junction Box Round 1 Way 20mm Shallow Heavy Duty PVC Grey
CBJBR1HD25	Junction Box Round 1 Way 25mm Shallow Heavy Duty PVC Grey
CBJBR2HD20	Junction Box Round 2 Way Through 20mm Shallow Heavy Duty PVC Grey
CBJBR2HD25	Junction Box Round 2 Way 25mm Shallow Heavy Duty PVC Grey

Certification Number:
AS/NZS IEC 60670-1:2015

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
October 2025