


CBR2016
CBR2520
CBR3225
CBR4032

*See current catalogue for further detail



Cobra Range of Conduit Connector Plain Reducers

- Colour: Electric Grey
- Material: PVC (Polyvinyl chloride)
- Lower / Upper temperature range: -15°C / 60°C
- Product application: Diameter 16mm, 20mm, 25mm & 40mm tube
- Standards: AS/NZS61386.1:2015;
IEC 61386-1: 2008 Part 1: General requirements;
IEC 61386-21: 2002 Part 21: Particular requirements – Rigid conduit systems

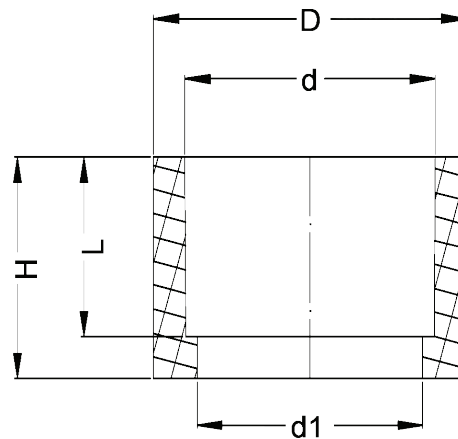

Catalogue Number	Size Spec (mm)	D	d	L	H	d1
CBR2016	20x16	20.0	16.0	18.0	21.6	13.6
CBR2520	25x20	25.0	20.0	22.0	24.8	17.3
CBR3225	32x25	32.0	25.0	22.3	27.0	22.3
CBR4032	40x32	40	32	25.6	31.2	28.5

Catalogue Number	Description
CBR2016	Reducer Plain to Plain 20mm 16mm PVC Grey
CBR2520	Reducer Plain to Plain 25mm 20mm PVC Grey
CBR3225	Reducer Plain to Plain 32mm 25mm PVC Grey
CBR4032	Reducer Plain to Plain 40mm to 32mm PVC Grey

Certification Number:
AS/NZS61386.1; IEC 61386-1; IEC 61386-21; IEC 60670-1

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 E: service@gsm.com.au
www.gsm.com.au



Data Specification Sheet
October 2025