
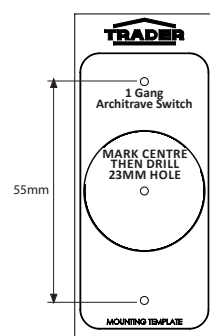


COSWVA1G COSWVA2G COSWVA3G COSWVA4G


See current catalogue for further detail

Architrave Switch Plates

- Switches are rated 10AX/16A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore.
- Slotted head screws for the terminals.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white.
- Approved to AS/NZS3133
- SBL100W.
- Typical example of size seen below:

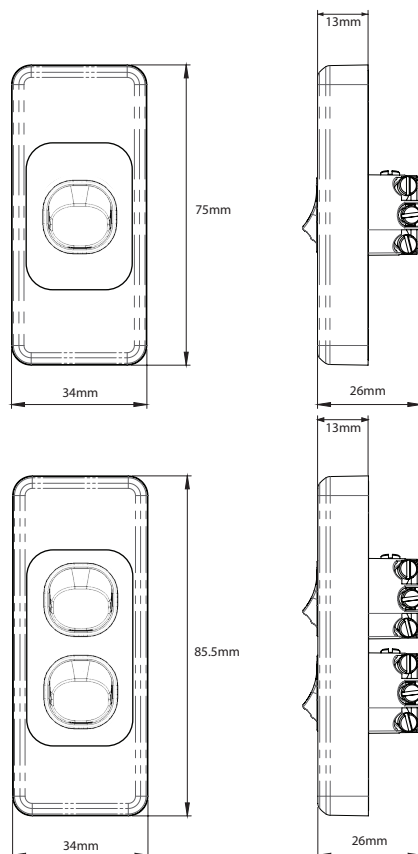

example of
cutting template
COSWVA1G

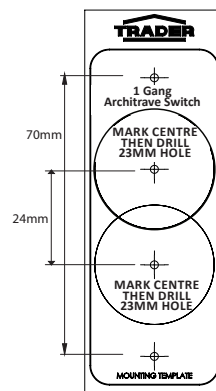

example of
cutting template
COSWVA2G

* The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd.

GSM Electrical (Australia) Pty Ltd, the TRADER brand and it's products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2

Catalogue Number	Description
COSWVA1G	Switch Vertical Architrave 1 Gang 10AX 16A 250V ac White
COSWVA2G	Switch Vertical Architrave 2 Gang 10AX 16A 250V ac White
COSWVA3G	Switch Vertical Architrave 3 Gang 10AX 16A 250V ac White
COSWVA4G	Switch Vertical Architrave 4 Gang 10AX 16A 250V ac White

Certification Number:

GMA-508434-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

