


TAP310RC TAP315RC TAP410RRC


See current catalogue for further detail

Rigid Cover Plugs

- Transparent housing for easy to see wiring connections
- Rigid body format with ribbed sides for secure fitment & gripping.
- Rear cord entry and cable insulation grip.
- Insulated pins in accordance to AS/NZS3112
- Internal cable clamp to support electrical connections.
- Ideal for applications where an additional active is required such as emergency lighting
- Suitable for 0.75mm² heavy duty and 1.0mm² ordinary duty flexible cords.
- TAP410RRC - Suitable for 1.0mm² heavy duty and 1.5mm² ordinary duty 4 core flexible cords
- TAP410RRC - 3 Flat Pin, 1 Round Pin. (With two actives)
- TAP410RRC - Suits applications with HYPP1G4P surface sockets



Catalogue Number	Amp	Pin Config.
TAP310RC	10	A
TAP315RC	15	B
TAP410RRC	10	C

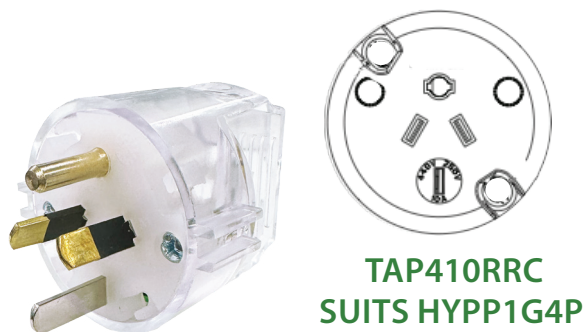


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

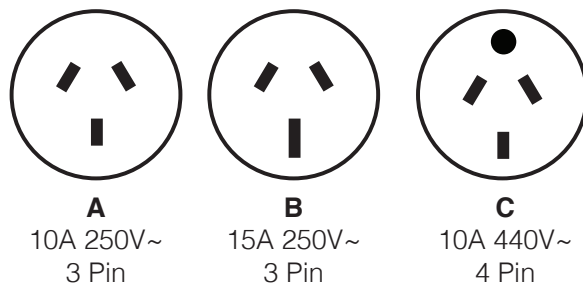

A
10A 250V~
3 Pin

B
15A 250V~
3 Pin

C
10A 440V~
4 Pin

Catalogue Number	Description
TAP310RC	Plug Top 3 Pin 10A 250V ac Rigid Cover Transparent
TAP315RC	Plug Top 3 Pin 15A 250V ac Rigid Cover Transparent
TAP410RRC	Plug Top 10A 440V ac 3 Flat and 1 Round Pin Rigid Cover Transparent

Certification Number:

GMA-525240-EA

TAP410RRC: GMA-525894-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



TAP310FC TAP310FCHD TAP315FC TAP315FCHD

See current catalogue for further detail

Flexible Cover Plugs

- Transparent housing for easy to see wiring connections
- Flexible body format for secure fitment & gripping.
- Rear cord entry and cable insulation grip.
- Insulated pins in accordance to AS/NZS3112
- Internal cable clamp to support electrical connections.
- Suitable for 0.75mm² heavy duty and 1.0mm² ordinary duty flexible cords.
- Standard cable sheath accomodation Ø7mm²
- Heavy duty cable sheath accomodation Ø8.5mm²



Catalogue Number	Amp	Pin Config.
TAP310FC	10	A
TAP310FCHD	10	A
TAP315FC	15	B
TAP315FCHD	15	B


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

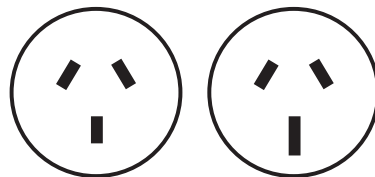

A
10A 250V~
3 Pin

B
15A 250V~
3 Pin

Catalogue Number	Description
TAP310FC	Plug Top 3 Pin 10A 250V ac Flexible Cover Transparent
TAP310FCHD	Plug Top 3 Pin 10A 250V ac Flexible Cover Heavy Duty Transparent
TAP315FC	Plug Top 3 Pin 15A 250V ac Flexible Cover Transparent
TAP315FCHD	Plug Top 3 Pin 15A 250V ac Flexible Cover Heavy Duty Transparent

Certification Number:

GMA-525592-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au





TAEXSO310RC TAEXSO315RC

See current catalogue for further detail

Rigid Cover Sockets

- Transparent housing for easy to see wiring connections
- Rigid body format with ribbed sides for secure fitment & gripping.
- Rear cord entry and cable insulation grip.
- Socket in accordance to AS/NZS3112
- Internal cable clamp to support electrical connections.
- Suitable for 1.0mm² heavy duty and 1.5mm² ordinary duty or heavy duty flexible cords.



Catalogue Number	Amp	Pin Config.
TAEXSO310RC	10	A
TAEXSO315FC	15	B


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

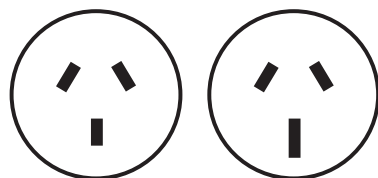

A

10A 250V~
3 Pin

B

15A 250V~
3 Pin

Catalogue Number	Description
TAEXSO310RC	Extension Socket 3 Pin 10A 250V ac Rewireable Rigid Cover Transparent
TAEXSO315RC	Extension Socket 3 Pin 15A 250V ac Rewireable Rigid Cover Transparent

Certification Number:

GMA-525241-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



TAEXSO310FC TAEXSO310HD TAEXSO315FC TAEXSO315FCHD

See current catalogue for further detail

Flexible Cover Sockets

- Transparent housing for easy to see wiring connections
- Flexible body format for secure fitment & gripping.
- Rear cord entry and cable insulation grip.
- Socket in accordance to AS/NZS3112
- Internal cable clamp to support electrical connections.
- Suitable for 0.75mm² heavy duty and 1.0mm² ordinary flexible cords.
- Standard cable sheath accomodation Ø7mm²
- Heavy duty cable sheath accomodation Ø8.5mm²



Catalogue Number	Amp	Pin Config.
TAEXSO310FC	10	A
TAEXSO310FCHD	10	A
TAEXSO315FC	15	B
TAEXSO315FCHD	15	B


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

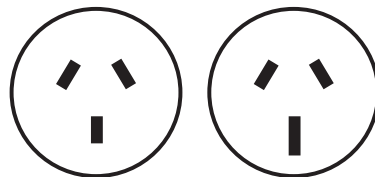

A
10A 250V~
3 Pin

B
15A 250V~
3 Pin

Catalogue Number	Description
TAEXSO310FC	Extension Socket 3 Pin 10A 250V ac Rewireable Flexible Cover Transparent
TAEXSO310FCHD	Extension Socket 3 Pin 10A 250V ac Rewireable Flexible Cover Heavy Duty Transparent
TAEXSO315FC	Extension Socket 3 Pin 15A 250V ac Rewireable Flexible Cover Transparent
TAEXSO315FCHD	Extension Socket 3 Pin 15A 250V ac Rewireable Flexible Cover Heavy Duty Transparent

Certification Number:

GMA-525242-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



June 2026



TAP310SE TAP315SE

See current catalogue for further detail

Side Entry Sockets

- Transparent housing for easy to see wiring connections
- Rigid body format for secure fitment & gripping.
- Rear cord entry and cable insulation grip.
- Insulated pins in accordance to AS/NZS3112
- Internal cable clamp to support electrical connections.
- Suitable for 0.75mm² heavy duty and 1.0mm² ordinary flexible cords.
- Standard cable sheath accomodation Ø7mm²



Catalogue Number	Amp	Pin Config.
TAP310SE	10	A
TAP315SE	15	B


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

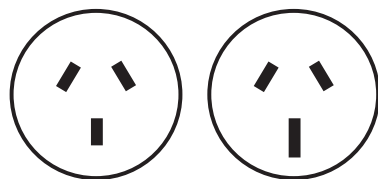

A
10A 250V~
3 Pin

B
15A 250V~
3 Pin

Catalogue Number	Description
TAP310SE	Plug Top 3 Pin 10A 250V ac Side Entry Transparent
TAP315SE	Plug Top 3 Pin 15A 250V ac Side Entry Transparent

Certification Number:

GMA-525239-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

