


CLPP1GMW

See current catalogue for further detail

Single Power Points

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm².
- Combination head screws for the power point terminals.
- Uses 'Cat Flap' screw covers for IP rating mounting screws.
- Dolly indicator colour green.
- Power points approved to AS/NZS3112.
- Standard colour is matt white. Also available in matt black - please check availability.
- Typical example of size seen below:

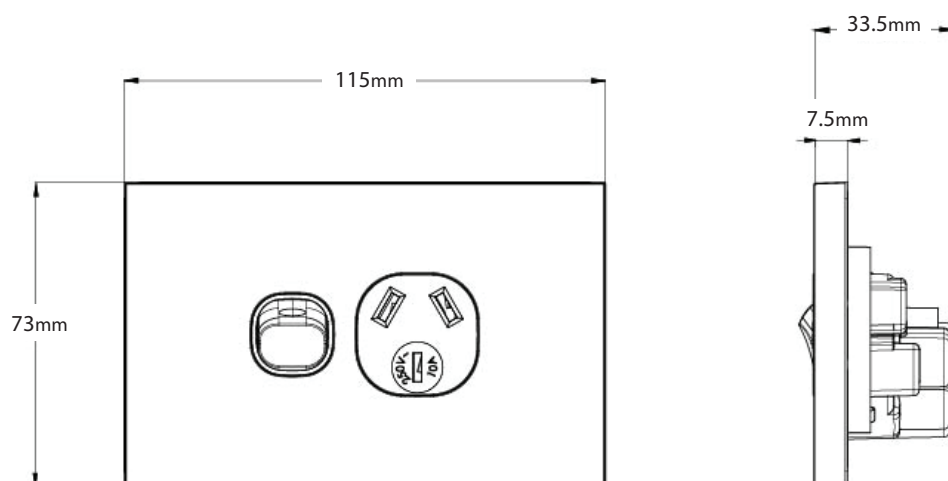

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Catalogue Number	Description
CLPP1GMW	Power Point Switched 1 Gang 10A 250V ac Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLPP1GMBK

Certification Number:

GMA-500349-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



CLPP2GMW CLPPSW2GMW CLPPV2GMW

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Double Power Points

- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm²
- Combination head screws for the power point terminals
- Uses 'Cat Flap' screw covers for IP rating mounting screws
- Dolly indicator colour green
- Power points approved to AS/NZS3112
- Standard colour is matt white. Also available in matt black - please check availability.
- Typical example of size seen below:

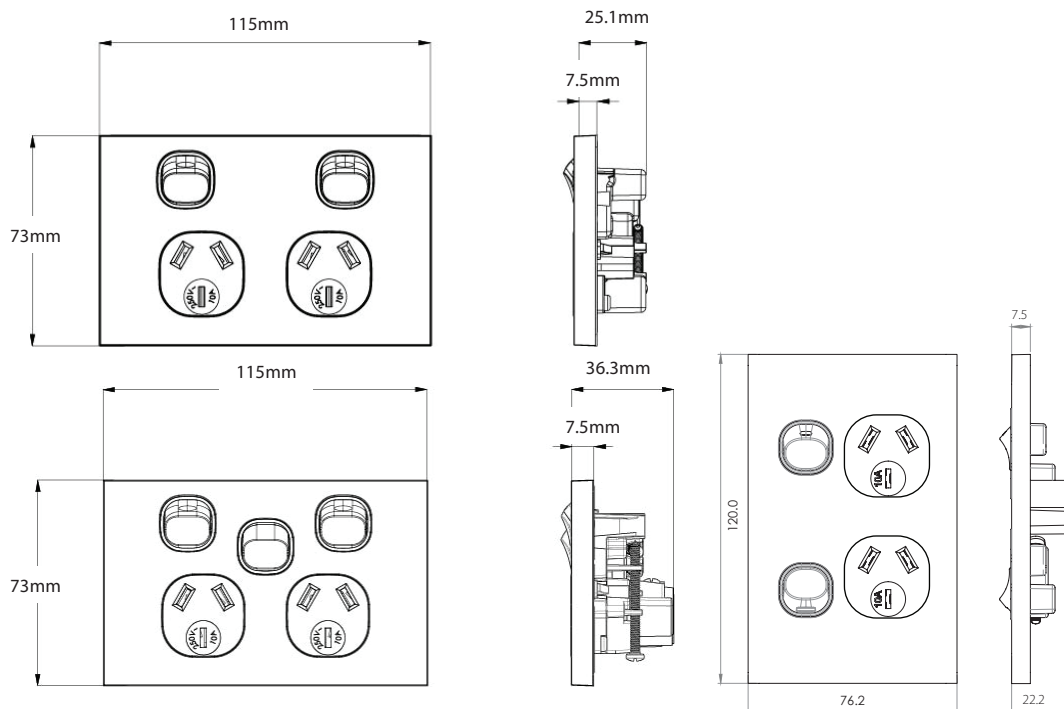

Catalogue Number	Description
CLPP2GMW	Power Point Switched 2 Gang 10A 250V ac Matt White
CLPPSW2GMW	Power Point Switched 2 Gang 10A 250V ac with Removable Extra Switch 16AX 20A Matt White
CLPPV2GMW	Power Point Switched Vertical 2 Gang 10A 250V ac Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLPP2GMBK

Certification Number:

GMA-500348-EA

GMA-500347-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au





CLPP2USBAUMW CLPP2USBAUCCMW

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



PAGE 1 of 2



Dual USB Charger Power Points

CLPP2USBAUMW

- Wall plate 7.5mm thick to align with other Clouded Leopard plates in the range.
- Power points rated to 10A 250V a.c.
- Warm white LED indicators to show power on status.
- USB outlets rated to 3.4A max total at 5V.
- Auto-Switched power point switches active upon plug insertion/withdrawal.
- Each electrical power point contains shutters activated from the neutral pin.
- The USB circuit is integrated with the power point outlet and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits standard mounting accessories with 84mm centres.
- Terminals suit 3 x 2.5mm².
- Recommended for phone use or small tablets only, larger devices such as laptops with USB C connections require much greater output.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is matt white. Also available in matt black - please check availability.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- Typical example of size seen below:

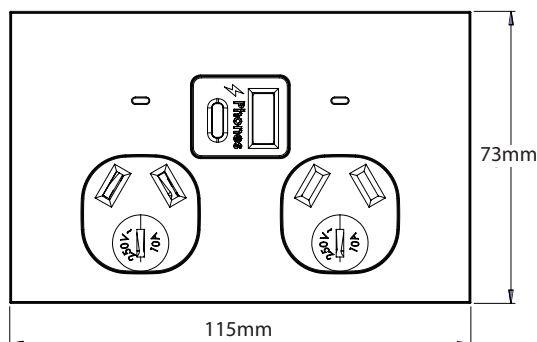

Catalogue Number	Description
CLPP2USBAUMW	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W Matt White
CLPP2USBAUCCMW	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLPP2USBAUMBK

Certification Number:

CLPP2USBAUMW: GMA-508628-EA

CLPP2USBAUCCMW: GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



CLPP2USBAUMW CLPP2USBAUCCMW

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



PAGE 2 of 2



Dual USB Charger Power Points

CLPP2USBAUCCMW

- Switch socket rated 10A 250V ac.
- Suitable for USB C applications and performs with the following characteristics:
- Socket: 250 V~; 50 Hz; 10 A;
- USB input: 230 - 240 V~; 50 Hz; max. 0,5 A
- USB-C output: DC 5 V / 3 A; DC 9 V / 3 A; DC 12 V / 2,5 A; DC 15 V / 2 A; DC 20 V / 1,5 A; PD 30 W max.;
- USB-C1 + C2 output: USB-C1: DC 5 V / 3 A; DC 9 V / 2,22 A; DC 12 V / 1,67 A; PD 20 W max. + USB-C2: DC 5 V / 2 A max.
- Socket tested in accordance with AS/NZS 3112.
- USB tested in accordance with IEC61558-2-16 and AS/NZS 61558.1.
- Not suitable for laptops requiring larger power requirement.
- Fits wall boxes and mounting accessories.
- Full cover plate.
- Covers and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is matt white. Also available in matt black - please check availability.
- Typical example of size seen below:

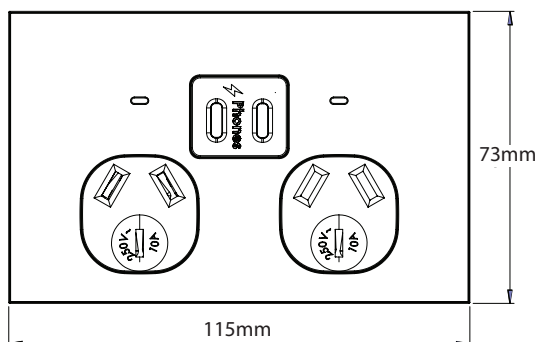

Catalogue Number	Description
CLPP2USBAUMW	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W Matt White
CLPP2USBAUCCMW	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLPP2USBAUCCMBK

Certification Number:

CLPP2USBAUMW: GMA-508628-EA

CLPP2USBAUCCMW: GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



CLSWV1GPBEMW CLSWV2GPBEMW

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.



Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Switch Plate with Push Buttons

These two assembly styles will be available in Matt White and Matt Black as finished products.

- Two models of Clouded Leopard are available prepopulated with MEPBE electronic push button switches and fitted with the special MEBUCMW flat button.
- These assemblies provide the simple convenience of the switch for use in many common applications.
- Where there are other applications for multiway switching the MEPBMW in matt white finish can be combined with the CLSWPV1GMW single gang plate through to the 6 gang plate can be installed along with the Matt White MEBUCMW button or other MEPBE.
- Other assemblies will likely require multi way switch combinations so must be purchased as separate components for switches, plates and buttons.
- The plates can also be populated with the DIMPBD where dimming is needed in the same technique as the MEPBE.
- These assemblies can also be produced in the matt black finish.

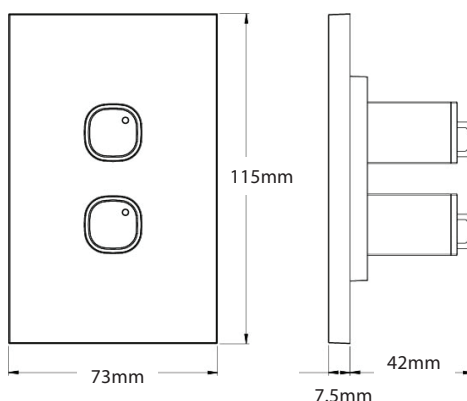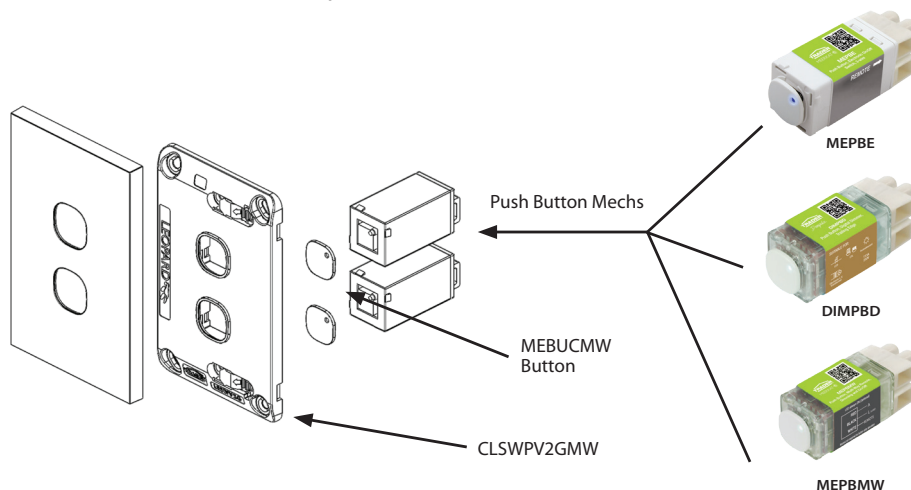

Catalogue Number	Description
CLSWV1GPBEMW	Switch Vertical 1 Gang MEPBE Push Button Electronic 1200W 250V ac Matt White
CLSWV2GPBEMW	Switch Vertical 2 Gang MEPBE Push Button Electronic 1200W 250V ac Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLSWV1GPBEMBK

Certification Number:

GMA-509446-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



Vertical Switches

CLSWV1GMW
CLSWV2GMW
CLSWV3GMW
CLSWV4GMW
CLSWV5GMW
CLSWV6GMW

Horizontal Switches

CLSW1GMW
CLSW2GMW
CLSW3GMW
CLSW4GMW
CLSW5GMW
CLSW6GMW

Switch Plates (Less Mechs)

CLSWPV1GMW
CLSWPV2GMW
CLSWPV3GMW
CLSWPV4GMW
CLSWPV5GMW
CLSWPV6GMW
CLSWPVXGMW

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Switch Plates

- Switches are rated 16AX/20A 250V~ and approved to AS/NZS60669-1
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore.
- Slotted head screws for the terminals
- Uses 'Cat Flap' screw covers for IP rating or mounting screws
- Plates suit Trader Meerkat MESWC mechs, including TV and Data; and Clipsal 30 Style* mechs and accessories
- Standard colour is matt white. Also available in matt black - please check availability.
- Typical example of size in diagram:

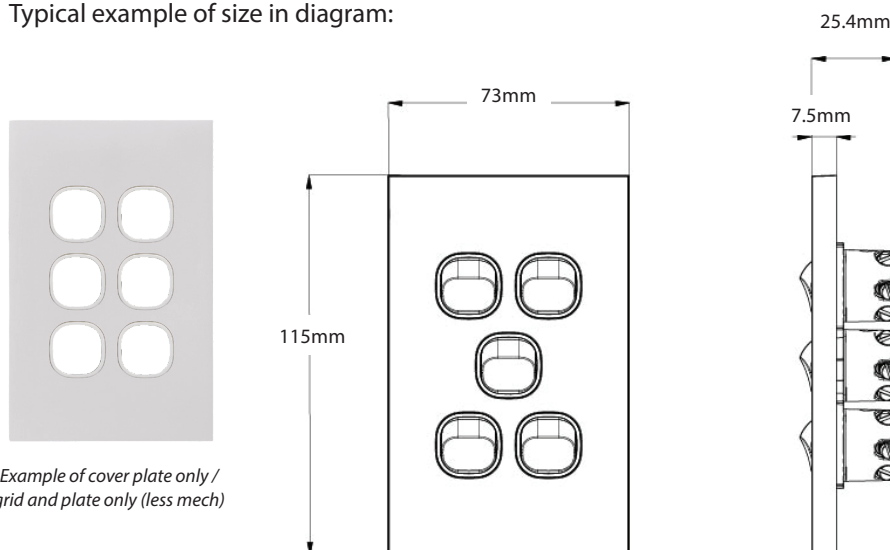

Example of cover plate only /
grid and plate only (less mech)

Catalogue No.	Description
CLSW1GMW	Switch Horizontal 1 Gang 16AX 20A 250V ac Matt White
CLSW2GMW	Switch Horizontal 2 Gang 16AX 20A 250V ac Matt White
CLSW3GMW	Switch Horizontal 3 Gang 16AX 20A 250V ac Matt White
CLSW4GMW	Switch Horizontal 4 Gang 16AX 20A 250V ac Matt White
CLSW5GMW	Switch Horizontal 5 Gang 16AX 20A 250V ac Matt White
CLSW6GMW	Switch Horizontal 6 Gang 16AX 20A 250V ac Matt White
CLSWV1GMW	Switch Vertical 1 Gang 16AX 20A 250V ac Matt White
CLSWV2GMW	Switch Vertical 2 Gang 16AX 20A 250V ac Matt White
CLSWV3GMW	Switch Vertical 3 Gang 16AX 20A 250V ac Matt White
CLSWV4GMW	Switch Vertical 4 Gang 16AX 20A 250V ac Matt White
CLSWV5GMW	Switch Vertical 5 Gang 16AX 20A 250V ac Matt White
CLSWV6GMW	Switch Vertical 6 Gang 16AX 20A 250V ac Matt White

Catalogue No.	Description
CLSWPV1GMW	Switch Plate Vertical 1 Gang Less Mech Matt White
CLSWPV2GMW	Switch Plate Vertical 2 Gang Less Mech Matt White
CLSWPV3GMW	Switch Plate Vertical 3 Gang Less Mech Matt White
CLSWPV4GMW	Switch Plate Vertical 4 Gang Less Mech Matt White
CLSWPV5GMW	Switch Plate Vertical 5 Gang Less Mech Matt White
CLSWPV6GMW	Switch Plate Vertical 6 Gang Less Mech Matt White
CLSWPVXGMW	Blank Plate and Cover Matt White

The above catalogue numbers where "P" appears in number, refers to Cover Plate Only / Grid and Plate only (less mech)

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLSW1GMBK

* The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd.

GSM Electrical (Australia) Pty Ltd, the TRADER brand and it's products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

Certification Number:

GMA-507879-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au





CLSWVA1GMW CLSWVA2GMW

See current catalogue for further detail


Architrave Switches

- Switches are rated 16AX/20A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is matt white. Also available in matt black - please check availability.
- Approved to AS/NZS60669-1
- Typical example of size seen below:

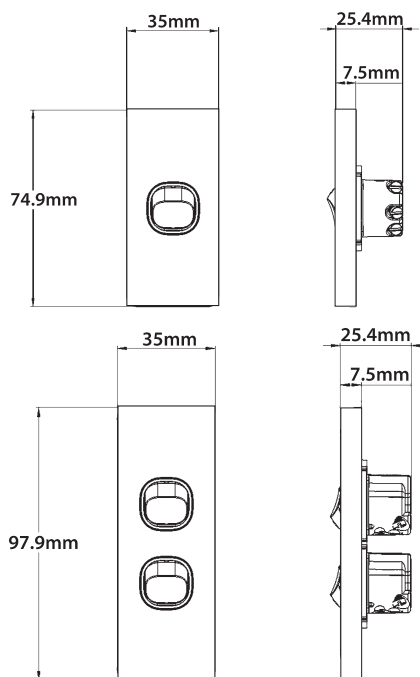

example of
cutting template
supplied

CLSWVA1GMW



example of
cutting template
supplied

CLSWVA2GMW

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
CLSWVA1GMW	Switch Vertical Architrave 1 Gang 16AX 20A 250V ac Matt White
CLSWVA2GMW	Switch Vertical Architrave 2 Gang 16AX 20A 250V ac Matt White

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLSWVA1GMBK

Certification Number:

GMA-507879-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au




CLSWDPOV45MW CLSWDPOV45MWH

See current catalogue for further detail

Oven Switches

- 45A 250V~, Double Pole
- Includes looping terminals
- Terminal bore 5.8mm diameter
- Standard colour is matt white. Also available in matt black - please check availability.
- Switch approved in accordance with AS/NZS60669-1

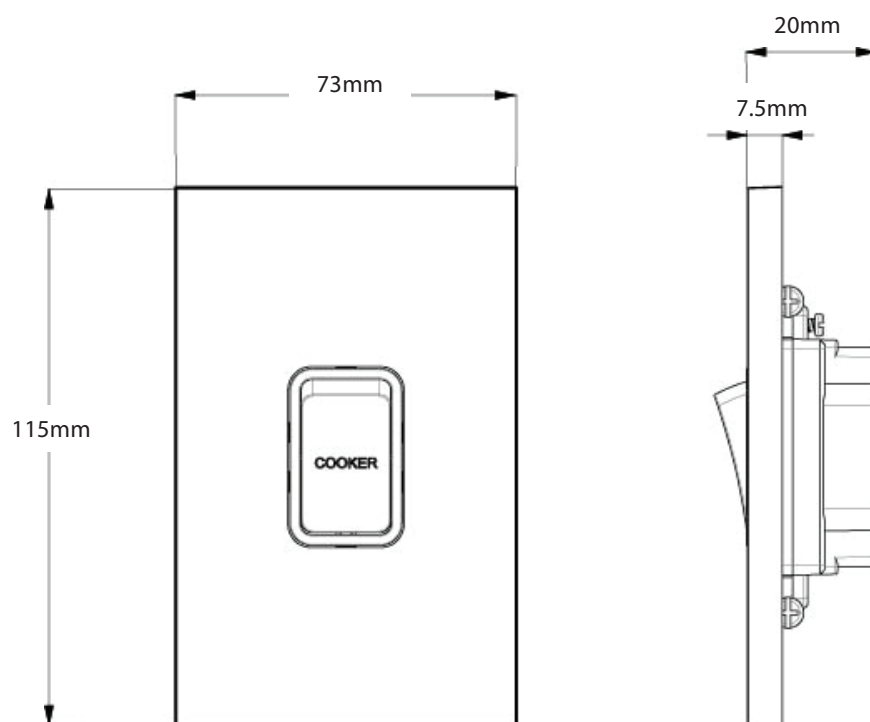

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
CLSWDPOV45MW	Switch Oven 45A 250V ac Double Pole Matt White
CLSWDPOV45MWH	Switch Oven 45A 250V ac Double Pole Matt White Horizontal

When ordering **MATT BLACK** product replace "MW" with "MBK" at end of catalogue number, ie CLSWDPOV45MBK

Certification Number:

GMA-514698

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

