

FLPP1G FLPP151G FLPP1GL

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.



It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Single Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power Point terminals have 5.8mm bore to suit 4 x 2.5mm² cable
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Matt White, Black, Matt Black & with Brushed Aluminium Covers - please check availability
- Typical example of size seen below:

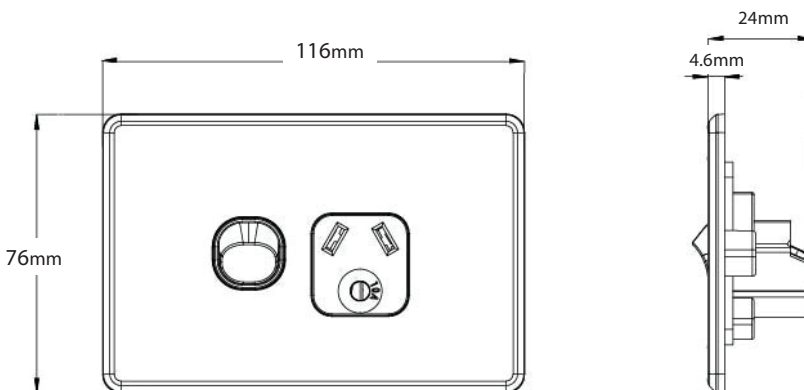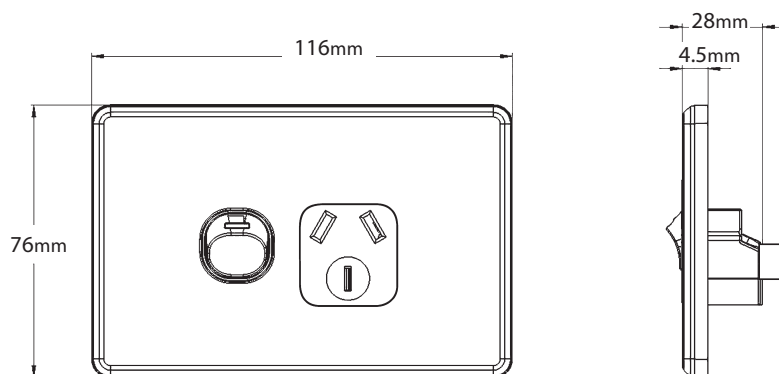

Catalogue Number	Description
FLPP1G	Power Point Switched 1 Gang 10A 250V ac White
FLPP151G	Power Point Switched 1 Gang 15A 250V ac White
FLPP1GL	Power Point Switched 1 Gang 10A 250V ac with Lighting Pin White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP1GBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP1GMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP1GMW

When ordering **BRUSHED ALUMINIUM** (cover) add "CBA" at end of catalogue number, ie FLPP1GCBA

When ordering **REPLACEMENT COVERS ONLY** add "CO" at end of catalogue number, ie FLPP1GCO

Certification Number:

FLPP1G: GMA-509981-EA

FLPP151G: GMA-508175-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



FLPP1GAU

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.



It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Single Power Point (Auto Switched)

- Uses brass terminals that have the screws backed out for easier installation of cabling. Power point terminals have Square wrapped terminals to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White.
- Power points approved to AS/NZS3112.
- Active is auto switched.
- Shuttered.
- Typical example of size seen below:

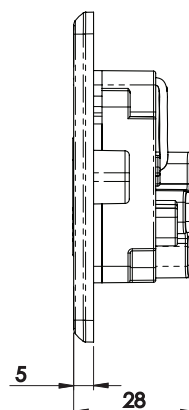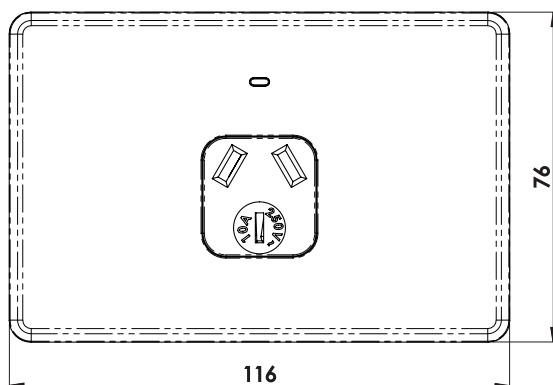

Catalogue Number	Description
FLPP1GAU	Power Point Auto Switched 1 Gang 10A 250V ac White

Certification Number:

GMA-511520-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au




FLPP2G FLPP152G FLPPSW2G FLPPV2G

See current catalogue for further detail

Double Power Points

- Switches approved to AS/NZS3133 or AS/NZS60669
- Power points approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.8mm bore to suit 4 x 2.5mm² cable
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Matt White, Black, Matt Black & Brushed Aluminium - please check availability
- Typical example of size seen below:

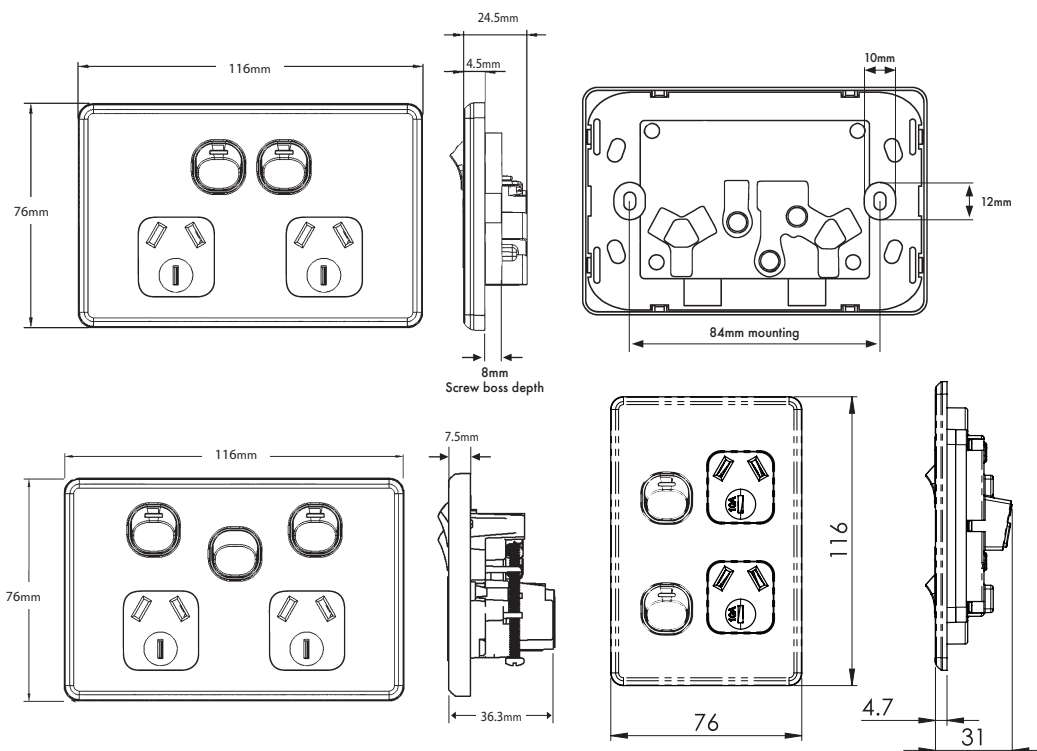

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
FLPP2G	Power Point Switched 2 Gang 10A 250V ac White
FLPP152G	Power Point Switched 2 Gang 15A 250V ac White
FLPPSW2G	Power Point Switched 2 Gang 10A 250V ac with Removable Extra Switch 16AX 20A White
FLPPV2G	Power Point Switched Vertical 2 Gang 10A 250V ac White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP2GBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP2GMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP2GMW

When ordering **BRUSHED ALUMINIUM** (cover) add "CBA" at end of catalogue number, ie FLPP2GCBA

When ordering **REPLACEMENT COVERS ONLY** add "CO" at end of catalogue number, ie FLPP2GCO

Certification Number:

GMA-502069-EA / GMA-500348-EA

FLPP2VG: GMA-513745-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



FLPP2GAU

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.



It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Double Power Points (Auto Switched)

- Uses brass terminals that have the screws backed out for easier installation of cabling. Power point terminals have Square wrapped terminals to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black, Matt White and Matt Black also stocked please check availability.
- Power points approved to AS/NZS3112.
- Active is auto switched.
- Shuttered.
- Typical example of size seen below:

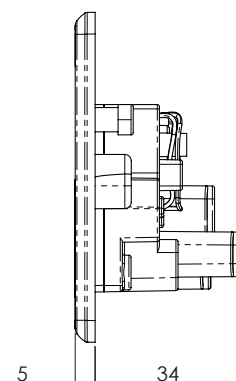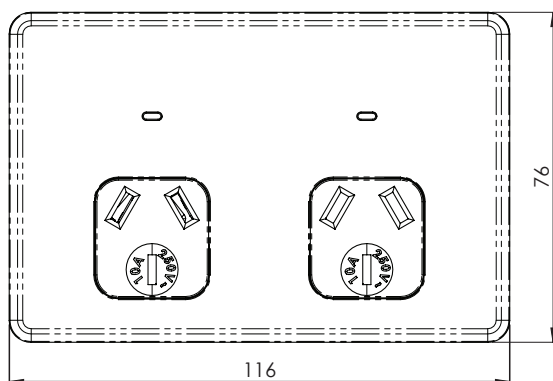

Catalogue Number	Description
FLPP2GAU	Power Point Auto Switched 2 Gang 10A 250V ac White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP2GAUBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP2GAUMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP2GAUMW

Certification Number:

GMA-511520-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



FLPP2USBAU FLPP2USBAUCC

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2




June 2026

Dual USB Charger Power Points

FLPP2USBAU

- Wall plate 4.5mm thick to align with other Flat Cat plates in the range.
- Power points rated to 10A 250V a.c.
- Warm white LED indicator to show power on status.
- USB outlet rated to 3.4A max total at 5V.
- Auto switched power point switches active upon plug insertion/withdrawal.
- Each electrical power point contains shutters activated from the neutral pin.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- The USB circuit is integrated with the power point and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits other standard mounting accessories where Flat Cat products are used.
- Terminals suit 3 x 2.5mm².
- Where panels are less than 10mm special recessed mounting accessories must be used.
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Recommended for phone use only, larger devices such as laptops with USB C connections require much greater output.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White. Also available in Matt White, Black, Matt Black & with Brushed Aluminium Covers (FLPP2USBAUCBA) - please check availability.
- Typical example of size seen below:

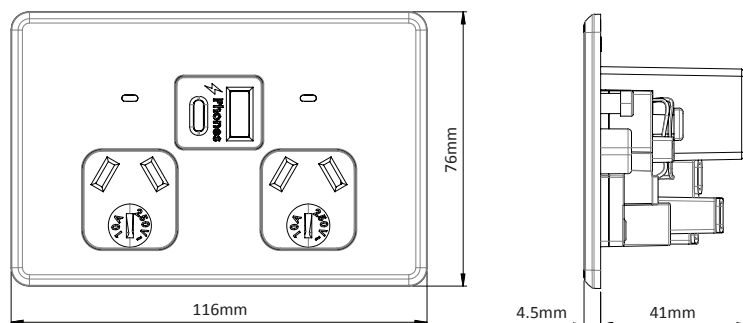

Catalogue Number	Description
FLPP2USBAU	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP2USBAUBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP2USBAUMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP2USBAUMW

Certification Number:

GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



FLPP2USBAU FLPP2USBAUCC

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 2 of 2




June 2026

Dual USB Charger Power Points

FLPP2USBAUCC

- Switch socket rated 10A 250V ac.
- Suitable for USB C applications and performs with the following characteristics:
- Socket: 250 V~; 50 Hz; 10 A;
- USB input: 230 - 240 V~; 50 Hz; max. 0,5 A
- USB-C output: DC 5 V / 3 A; DC 9 V / 3 A; DC 12 V / 2,5 A; DC 15 V / 2 A; DC 20 V / 1,5 A; PD 30 W max.;
- USB-C1 + C2 output: USB-C1: DC 5 V / 3 A; DC 9 V / 2,22 A; DC 12 V / 1,67 A; PD 20 W max. + USB-C2: DC 5 V / 2 A max.
- Socket tested in accordance with AS/NZS 3112.
- USB tested in accordance with IEC61558-2-16 and AS/NZS 61558.1.
- Not suitable for laptops requiring larger power requirement.
- Fits wall boxes and mounting accessories.
- Full cover plate.
- Covers and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White. Also available in Matt White, Black, Matt Black
- This model does not fit the brushed Aluminium cover that are stocked of similar models.

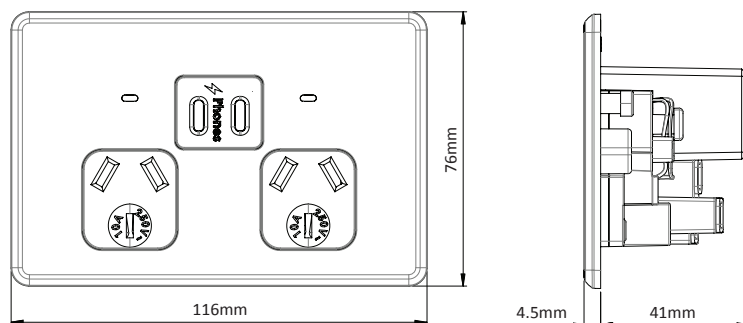

Catalogue Number	Description
FLPP2USBAU	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W White
FLPP2USBAUCC	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP2USBAUCCBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP2USBAUCCMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP2USBAUCCMW

Certification Number:

GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



FLPP4G

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

4 Gang Power Points

- 183mm mounting centers
- Supplied 2 gang wall bracket
- Pre-wired with a 240mm cable loop for easy installation to suit 1 power circuit
- 5mm thick
- Single Pole switched
- 10A 250V
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Approved to AS/NZS3112.
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power Point terminals have 5.8mm bore to suit 4 x 2.5mm² cable.
- Standard colour is White. Also available in Matt White, Black and Matt Black - please check availability

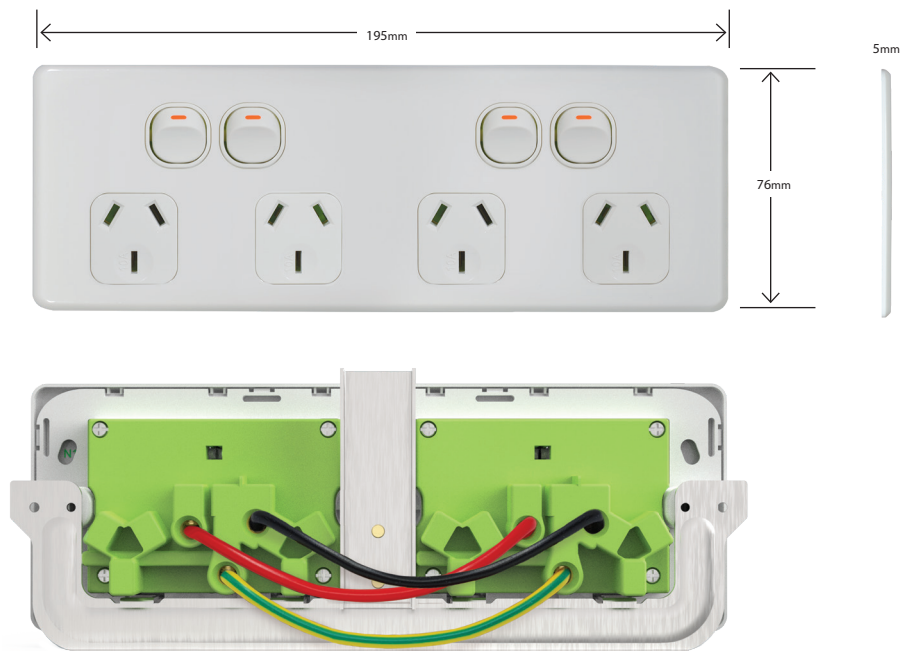

Catalogue Number	Description
FLPP4G	Power Point Switched 4 Gang 10A 250V ac with Custom Mounting Bracket White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP4GBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP4GMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP4GMW

Certification Number:

GMA-502069-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



FLBRUSH

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Brush Cable Management Flush Plate

- Excellent dust sealing solutions for telecommunications and data cabling applications.
- They are ideal for positioning behind wall mounted televisions, home theatre and component systems
- The cabling remains neat and tidy with a minimum visually exposed out of the wall cavity, with the large openings allowing multiple cables to be accommodated at once.
- Standard colour is White. Also available in Matt White, Black & Matt Black - please check availability.

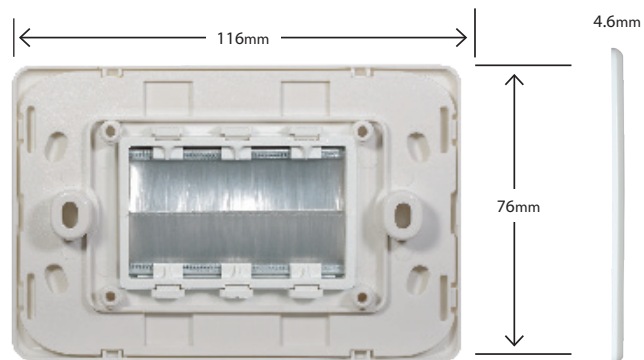

Catalogue Number	Description
FLBRUSH	Brush Cable Management Flush Plate White

When ordering **BLACK** product add "**BK**" at end of catalogue number, ie FLBRUSHBK

When ordering **MATT BLACK** product add "**MBK**" at end of catalogue number, ie FLBRUSHBK

When ordering **MATT WHITE** product add "**MW**" at end of catalogue number, ie FLBRUSHMW

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



Vertical Switches

FLSWV1G
FLSWV2G
FLSWV3G
FLSWV4G
FLSWV5G
FLSWV6G

Horizontal Switches

FLSW1G
FLSW2G
FLSW3G
FLSW4G
FLSW5G
FLSW6G

Switch Plates (Less Mechs)

FLSWPV1G
FLSWPV2G
FLSWPV3G
FLSWPV4G
FLSWPV5G
FLSWPV6G
FLSWPVXG

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Switch Plates


- Switches are rated 10AX/16A 250V~ and approved to AS/NZS3133
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1 bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Matt White, Black, Matt Black & Brushed Aluminium - please check availability
- SBL100W
- Plates suit Trader Meerkat MESW mechs, including TV and Data; and Clipsal 30 Style* mechs and accessories
- Typical example of size seen below:



Example of cover plate only / grid and plate only (less mech)



Example of cover plate with MERJ6CM data mech installed

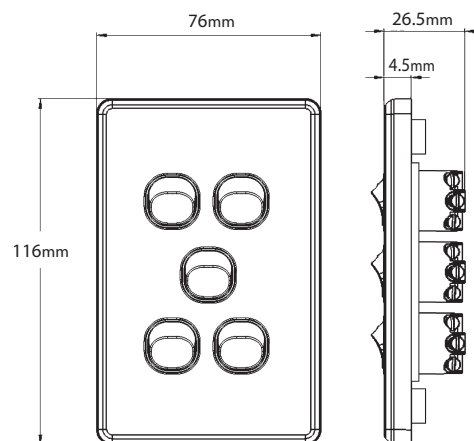

Catalogue No.	Description
FLSW1G	Switch Horizontal 1 Gang 10AX 16A 250V ac White
FLSW2G	Switch Horizontal 2 Gang 10AX 16A 250V ac White
FLSW3G	Switch Horizontal 3 Gang 10AX 16A 250V ac White
FLSW4G	Switch Horizontal 4 Gang 10AX 16A 250V ac White
FLSW5G	Switch Horizontal 5 Gang 10AX 16A 250V ac White
FLSW6G	Switch Horizontal 6 Gang 10AX 16A 250V ac White
FLSWV1G	Switch Vertical 1 Gang 10AX 16A 250V ac White
FLSWV2G	Switch Vertical 2 Gang 10AX 16A 250V ac White
FLSWV3G	Switch Vertical 3 Gang 10AX 16A 250V ac White
FLSWV4G	Switch Vertical 4 Gang 10AX 16A 250V ac White
FLSWV5G	Switch Vertical 5 Gang 10AX 16A 250V ac White
FLSWV6G	Switch Vertical 6 Gang 10AX 16A 250V ac White

Catalogue No.	Description
FLSWPV1G	Switch Plate Vertical 1 Gang Less Mech White
FLSWPV2G	Switch Plate Vertical 2 Gang Less Mech White
FLSWPV3G	Switch Plate Vertical 3 Gang Less Mech White
FLSWPV4G	Switch Plate Vertical 4 Gang Less Mech White
FLSWPV5G	Switch Plate Vertical 5 Gang Less Mech White
FLSWPV6G	Switch Plate Vertical 6 Gang Less Mech White
FLSWPVXG	Blank Plate and Cover White

The above catalogue numbers where "P" appears in number, refers to Cover Plate Only / Grid and Plate only (less mech)

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLSWV1GBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLSWV1GBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLSWV1GMW

* The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd.

GSM Electrical (Australia) Pty Ltd, the TRADER brand and it's products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

Certification Number:

GMA-508434-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



FLPP1GCBA
FLPP2GCBA
FLPPSW2GCBA
FLPP2USBAUCBA
FLSWPV1GCBA
FLSWPV2GCBA
FLSWPV3GCBA
FLSWPV4GCBA
FLSWPV5GCBA
FLSWPV6GCBA

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Brushed Aluminium Covers

- Brushed Aluminium covers provide a great protective upgrade to switches and power points and do not fingerprint as much as other materials while providing a similar look.
- The brushed finish is complemented with the décor of other brushed stainless appliances or looks stylish on other backgrounds.

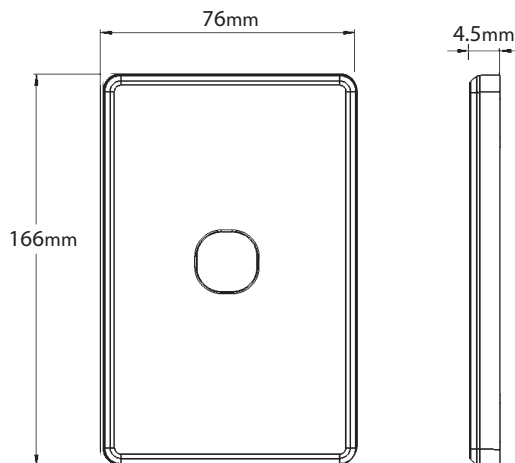

Example of cover plate
FLPPSW1GCBA



Example of cover plate with
FLPPSW1GCBA with FLPPSWV1G



Example of cover plate with
FLPPSW1GCBA with FLPPSWV1GBK

Catalogue Number	Description
FLPP1GCBA	Power Point Switched 1 Gang Cover Only Brushed Aluminium
FLPP2GCBA	Power Point Switched 2 Gang Cover Only Brushed Aluminium
FLPP2USBAUCBA	Power Point 2 Gang with Dual USB Cover Only Brushed Aluminium
FLPPSW2GCBA	Power Point Switched 2 Gang with Removable Extra Switch Cover Only Brushed Aluminium
FLSWPV1GCBA	Switch Plate Vertical 1 Gang Cover Only Brushed Aluminium
FLSWPV2GCBA	Switch Plate Vertical 2 Gang Cover Only Brushed Aluminium
FLSWPV3GCBA	Switch Plate Vertical 3 Gang Cover Only Brushed Aluminium
FLSWPV4GCBA	Switch Plate Vertical 4 Gang Cover Only Brushed Aluminium
FLSWPV5GCBA	Switch Plate Vertical 5 Gang Cover Only Brushed Aluminium
FLSWPV6GCBA	Switch Plate Vertical 6 Gang Cover Only Brushed Aluminium





FLSWVA1G FLSWVA2G

See current catalogue for further detail

Architrave Switches

- Switches are rated 10AX/16A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Black, Matt White and Matt Black also stocked
- please check availability
- Approved to AS/NZS3133
- SBL100W
- Typical example of size seen below:

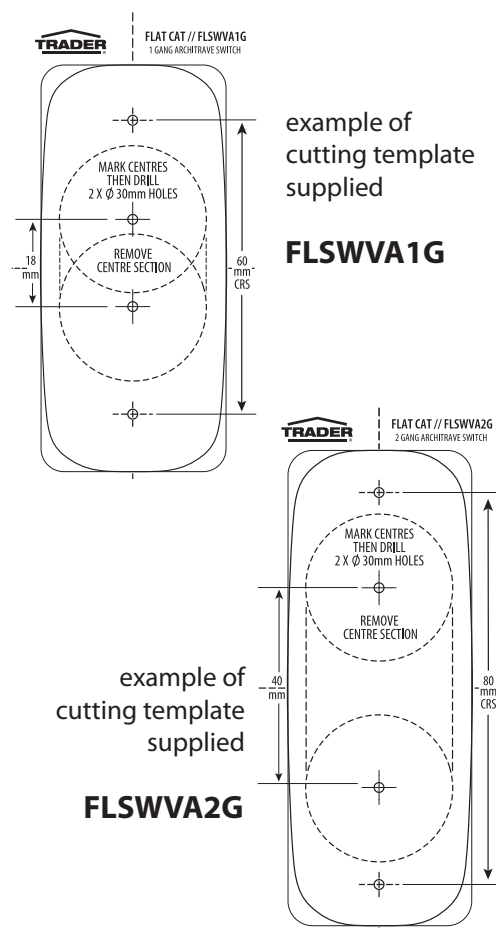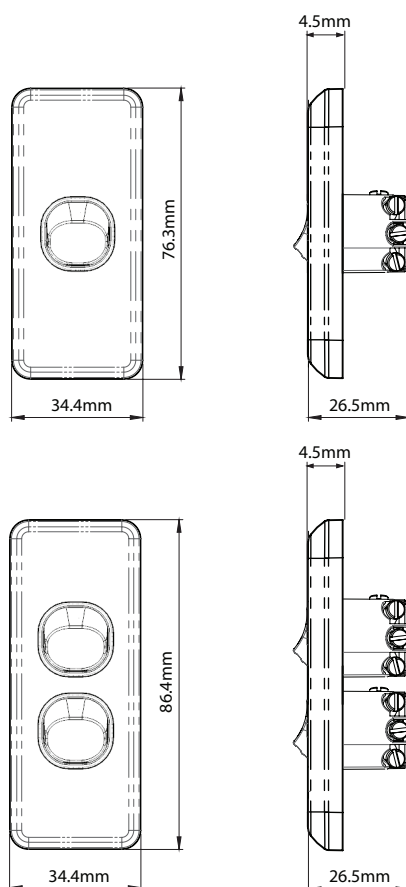

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
FLSWVA1G	Switch Vertical Architrave 1 Gang 10AX 16A 250V ac White
FLSWVA2G	Switch Vertical Architrave 2 Gang 10AX 16A 250V ac White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLSWVA1GBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLSWVA1GMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLSWVA1GMW



June 2026