

LEPP1G LEPP151G LEPPSW1G

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Single Power Points

- Switches approved to AS/NZS3133
- Power point outlets approved to AS/NZS3112
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm²
- Combination head screws for the power point terminals
- Uses 'Cat Flap' screw covers for IP rating mounting screws
- Dolly indicator colour green
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black and Brushed Aluminium also stocked - please check availability
- Typical example of size seen below:

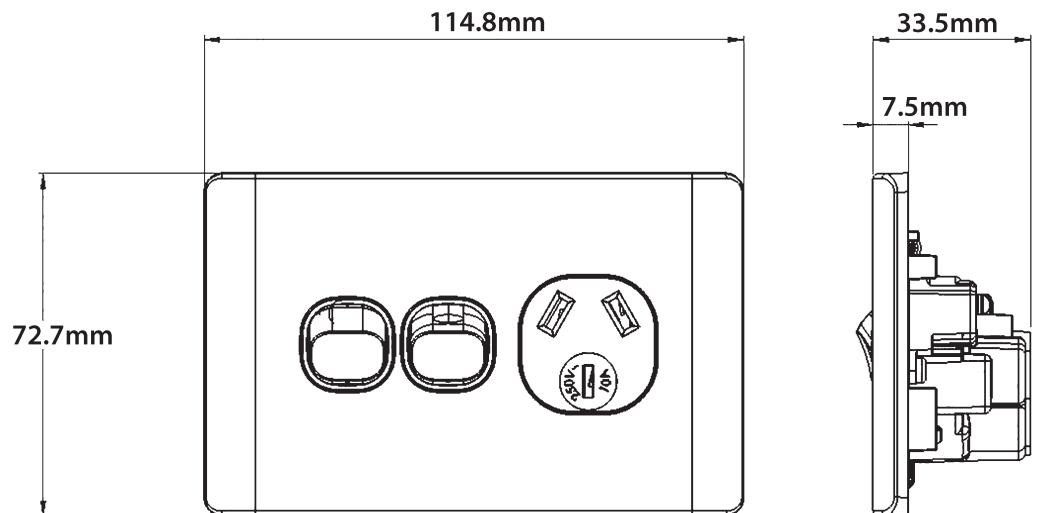

Catalogue Number	Description
LEPP1G	Power Point Switched 1 Gang 10A 250V ac White
LEPP151G	Power Point Switched 1 Gang 15A 250V ac White
LEPPSW1G	Power Point Switched 1 Gang 10A 250V ac with Extra Switch 16AX 20A White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEPP1GBK

When ordering **REPLACEMENT COVERS ONLY** add "CO" at end of catalogue number, ie LEPP1GCO

Certification Number:

GMA-500349-EA

GMA-500347-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



LEPP2G LEPP152G LEPPSW2G

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Double Power Points

- Power points approved to AS/NZS3112
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm²
- Combination head screws for the power point terminals
- Uses 'Cat Flap' screw covers for IP rating mounting screws
- Dolly indicator colour green
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black and Brushed Aluminium also stocked - please check availability
- Typical example of size seen below:

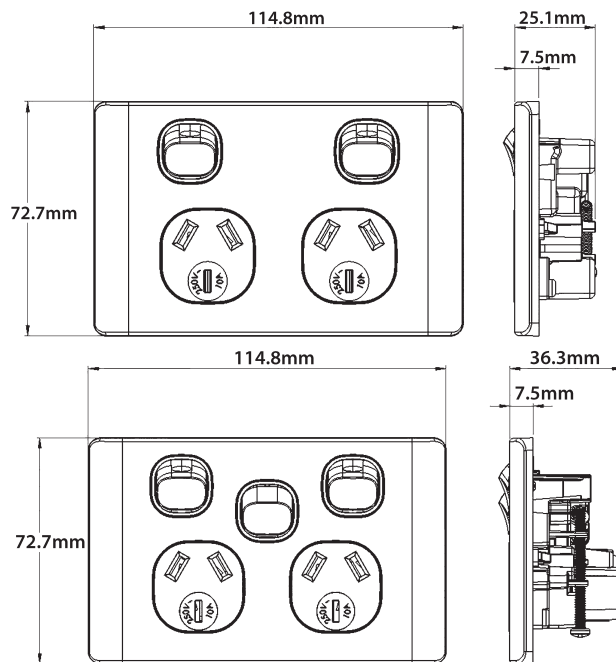

Catalogue Number	Description
LEPP2G	Power Point Switched 2 Gang 10A 250V ac White
LEPP152G	Power Point Switched 2 Gang 15A 250V ac White
LEPPSW2G	Power Point Switched 2 Gang 10A 250V ac with Extra Switch 16AX 20A White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEPP2GBK

When ordering **REPLACEMENT COVERS ONLY** add "CO" at end of catalogue number, ie LEPP2GCO

Certification Number:

GMA-500347-EA

GMA-500348-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



LEPPV1G LEPPV2G

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Vertical Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm²
- Combination head screws for the power point terminals
- Dolly indicator colour green
- Covers, plates and dollies made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White, LEPPV2G comes in Black (LEPPV2GBK) - Please check availability
- Typical example of size seen below:

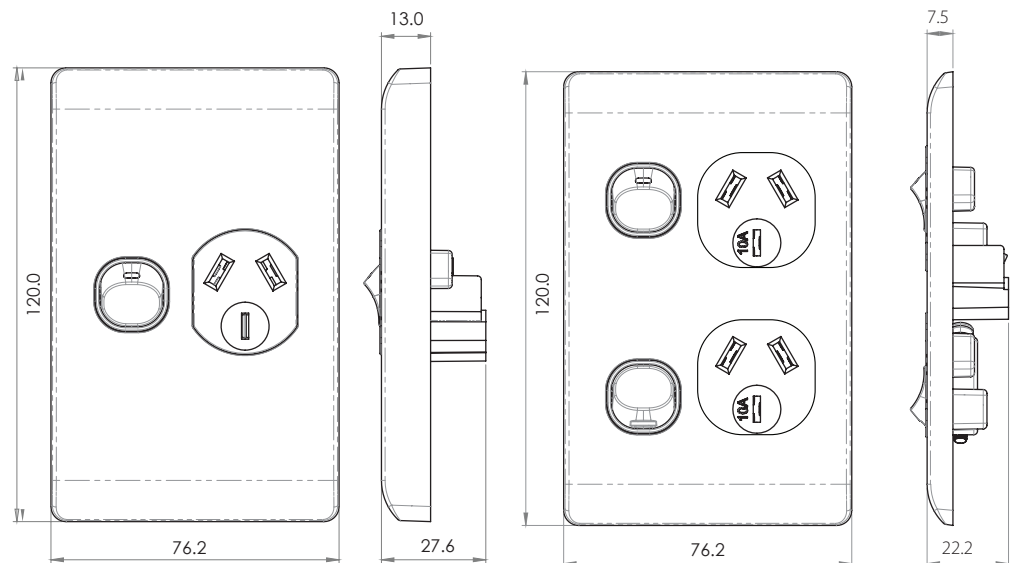

Catalogue Number	Description
LEPPV1G	Power Point Switched Vertical 1 Gang 10A 250V ac White
LEPPV2G	Power Point Switched Vertical 2 Gang 10A 250V ac White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEPPV2GBK

Certification Number:

LEPPV2G: GMA-501807-EA

LEPPV2G: GMA-513745-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



LEPP2USBAU LEPP2USBAUCC

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).



Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2

Dual USB Charger Power Points

LEPP2USBAU

- Wall plate 7.5mm thick to align with other Leopard plates in the range.
- Power points rated to 10A 250V a.c.
- Warm white LED indicators to show power on status.
- USB outlets rated to 3.4A max total at 5V.
- Auto-Switched power point switches active upon plug insertion/withdrawal.
- Each electrical power point contains shutters activated from the neutral pin.
- The USB circuit is integrated with the power point outlet and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits standard mounting accessories with 84mm centres.
- Terminals suit 3 x 2.5mm².
- Recommended for phone use or small tablets only, larger devices such as laptops with USB C connections require much greater output.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White. Also available in Black.
- Brushed Aluminium Covers (LEPP2USBAUCBA) available.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- Typical example of size seen below:

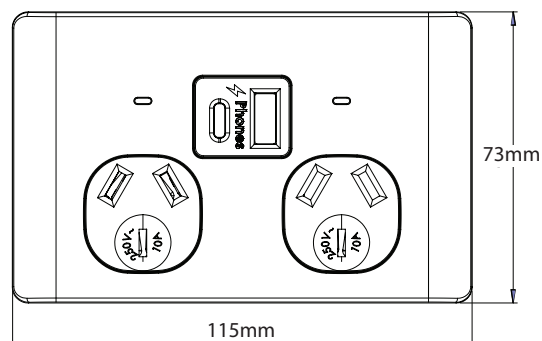

Catalogue Number	Description
LEPP2USBAU	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W White
LEPP2USBAUCC	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEPP2USBAUBK

Certification Number:

GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



LEPP2USBAU LEPP2USBAUCC

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).



Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 2 of 2

Dual USB Charger Power Points

LEPP2USBAUCC

- Switch socket rated 10A 250V ac.
- Suitable for USB C applications and performs with the following characteristics:
- Socket: 250 V~; 50 Hz; 10 A;
- USB input: 230 - 240 V~; 50 Hz; max. 0,5 A
- USB-C output: DC 5 V / 3 A; DC 9 V / 3 A; DC 12 V / 2,5 A; DC 15 V / 2 A; DC 20 V / 1,5 A; PD 30 W max.;
- USB-C1 + C2 output: USB-C1: DC 5 V / 3 A; DC 9 V / 2,22 A; DC 12 V / 1,67 A; PD 20 W max. + USB-C2: DC 5 V / 2 A max.
- Socket tested in accordance with AS/NZS 3112.
- USB tested in accordance with IEC61558-2-16 and AS/NZS 61558.1.
- Not suitable for laptops requiring larger power requirement.
- Fits wall boxes and mounting accessories.
- Full cover plate.
- Covers and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White. Also available in Black.
- This model does not fit the brushed Aluminium cover that are stocked of similar models.

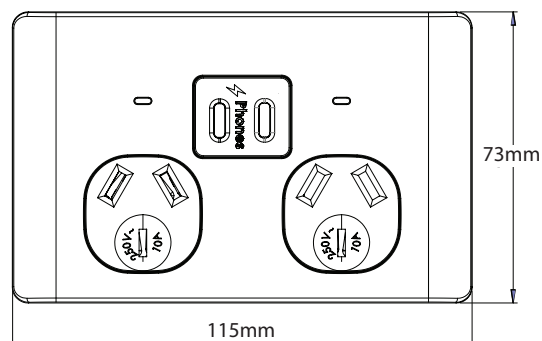

Catalogue Number	Description
LEPP2USBAU	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W White
LEPP2USBAUCC	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type C PD20W LHS and 5V 2A 10W RHS or Single PD30W White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEPP2USBAUCCBK

Certification Number:

GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



LEPPSHELF

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Power Point Shelf

- Suitable for use with Leopard LEPP2G plates
- Includes screw caps and plugs for secure retention on wall
- No need to remove wall plates from wall for installation of the shelf



Example of the Leopard Shelf in use with LEPP2G

Easy to install:
Align Top first against wall then slide down and swing bottom into place



Example of the Leopard Shelf in use

Catalogue Number	Description
LEPPSHELF	Power Point Shelf White



LEBIG4 LEBIG5

See current catalogue for further detail

PUBIG4MB and PUBIG5MB Mounting Blocks

(Separate Data Sheet available with measurements details)

- 25mm high mounting block to suit PUBIG4, LEBIG4, PUBIG5 and LEBIG5
- Made from UV stabilised polycarbonate to avoid discolouring to yellow
- BIG4 Mounting blocks include backing plates for situations where fully enclosed insulation is required.
- BIG5 Mounting blocks include backing plates for situations where fully enclosed insulation is required.

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.


BIG4 and BIG5 Power Points

LEBIG4

- Double pole surface mounted switched 4 Gang Power Point.
- 10A at 250V~
- Diameter 6mm terminal bores to suit 4 x 2.5 mm² cables.
- Fits 84 mm mounting centres.
- Dolly indicator colour green.
- Covers, plates and dollies made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Colour available in white or black. Please check availability,
- Approved to AS/NZS3112.

LEBIG5

- Double pole surface mounted switched 5 Gang Power Point, 10A at 250V~
- Diameter 6mm terminal bores to suit 4 x 2.5 mm² cables.
- Fits 84 mm mounting centres.
- Dolly indicator colour green.
- Covers, plates and dollies made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Approved to AS/NZS3112.
- Colour available in white or black. Please check availability,
- The BIG5 uses the same features and mounting system as the BIG4, but has the additional switched power point for convenience.

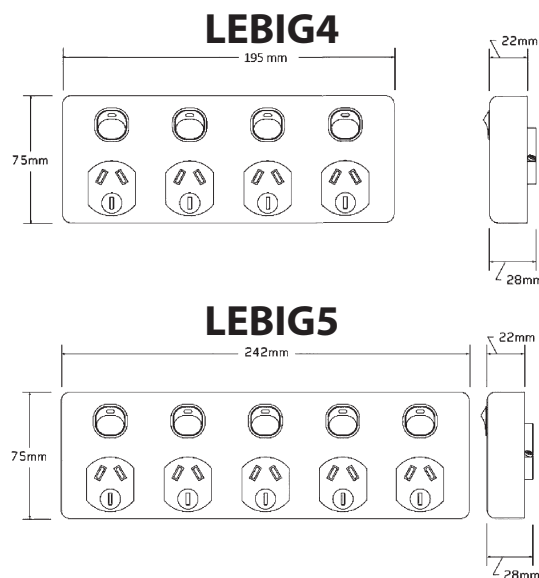

Catalogue Number	Description
LEBIG4	Power Point Switched 4 Gang Double Pole 10A 250V ac Fits Standard 84mm Mounting Centres White
LEBIG5	Power Point Switched 5 Gang Double Pole 10A 250V ac Fits Standard 84mm Mounting Centres White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEBIG4BK

Certification Number:

GMA-507804-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



LE4X4 LE4X4AC

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

4x4 Power Points x 4 USBs


LE4X4

- Approved to AS/NZS3112 & AS/NZS60950-1
- Four power points and four USB ports
- Wide spacing between power points for wide plug bases.
- Mounting Block [PU4X4MB] suits Leopard 4X4 Products
- The rating for the USB is 2 x 3.1A at 5V when one device is inserted then it divides to split the output when a device is inserted in each USB socket - 3.1A available across 2 USB outlets on the left and 3.1A available across 2 USB outlets on the right
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White. Also available in Black - please check availability

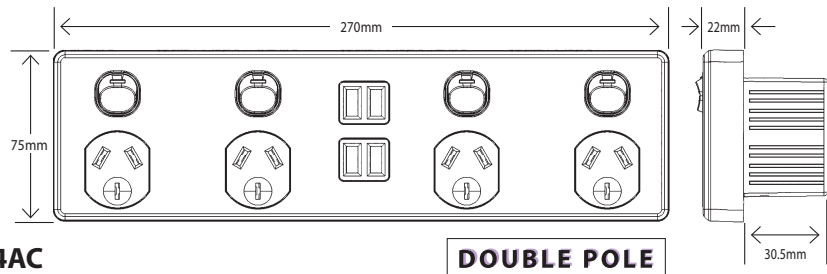

LE4X4AC

- Approved to AS/NZS3112 & AS/NZS60950-1
- Suitable for USB Type C applications up to 3 Amp at 5V.
- Ideal for phones that utilise USB Type C connections.
- Not suitable for lap tops or other devices requiring greater output than 3 Amp at 5V.
- Four power points and four USB ports
- Wide spacing between power points for wide plug bases.
- Mounting Block [PU4X4MB] suits Leopard 4X4 Products
- The overall electronic assembly rating is 3.1A at 5V; it then divides the output when devices are inserted in each USB socket.
- Fits standard wall boxes and mounting accessories
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White.

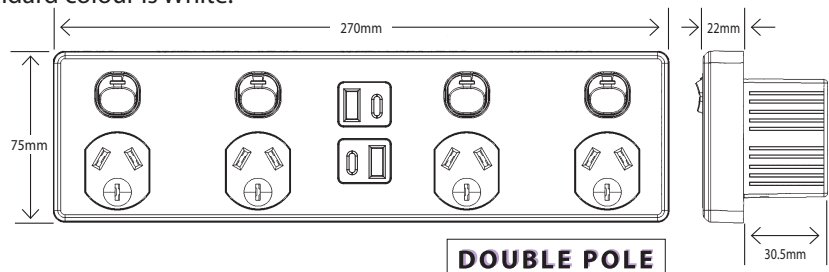

Catalogue Number	Description
LE4X4	Power Point 4 Gang 10A 250V ac Double Pole Quad USB Charger Integrated Type A 5V 3.1A Top 3.1A Bottom White
LE4X4AC	Power Point Switched 4 Gang 10A 250V ac Double Pole Quad USB Charger Integrated Type AC PD20W LHS or 5V 3A 18W RHS or Dual 15W Top and Bottom White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LE4X4BK

Certification Number:

GMA-502543-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au



Vertical Switches

LESWV1G
LESWV2G
LESWV3G
LESWV4G
LESWV5G
LESWV6G

Horizontal Switches

LESW1G
LESW2G
LESW3G
LESW4G
LESW5G
LESW6G

Switch Plates (Less Mechs)

LESWPV1G
LESWPV2G
LESWPV3G
LESWPV4G
LESWPV5G
LESWPV6G
LESWPVXG

See current catalogue for further detail

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Switch Plates


- Switches are rated 16AX/20A 250V~ and approved to AS/NZS60669-1
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Uses 'Cat Flap' screw covers for IP rating or mounting screws
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black and Brushed Aluminium covers also stocked - please check availability
- Plates suit Trader Meerkat MESWC mechs, including TV and Data; and Clipsal 30 Style* mechs and accessories
- Typical example of size in diagram:



Example of cover plate only / grid and plate only (less mech)



Example of cover plate with MERJ6CM data mech installed

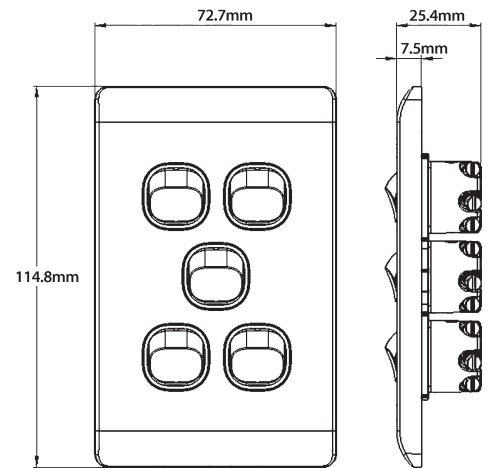

Catalogue No.	Description
LESW1G	Switch Horizontal 1 Gang 10AX 16A 250V ac White
LESW2G	Switch Horizontal 2 Gang 10AX 16A 250V ac White
LESW3G	Switch Horizontal 3 Gang 10AX 16A 250V ac White
LESW4G	Switch Horizontal 4 Gang 10AX 16A 250V ac White
LESW5G	Switch Horizontal 5 Gang 10AX 16A 250V ac White
LESW6G	Switch Horizontal 6 Gang 10AX 16A 250V ac White
LESWV1G	Switch Vertical 1 Gang 10AX 16A 250V ac White
LESWV2G	Switch Vertical 2 Gang 10AX 16A 250V ac White
LESWV3G	Switch Vertical 3 Gang 10AX 16A 250V ac White
LESWV4G	Switch Vertical 4 Gang 10AX 16A 250V ac White
LESWV5G	Switch Vertical 5 Gang 10AX 16A 250V ac White
LESWV6G	Switch Vertical 6 Gang 10AX 16A 250V ac White

Catalogue No.	Description
LESWPV1G	Switch Plate Vertical 1 Gang Less Mech White
LESWPV2G	Switch Plate Vertical 2 Gang Less Mech White
LESWPV3G	Switch Plate Vertical 3 Gang Less Mech White
LESWPV4G	Switch Plate Vertical 4 Gang Less Mech White
LESWPV5G	Switch Plate Vertical 5 Gang Less Mech White
LESWPV6G	Switch Plate Vertical 6 Gang Less Mech White
LESWPVXG	Blank Plate and Cover White

The above catalogue numbers where "P" appears in number, refers to Cover Plate Only / Grid and Plate only (less mech)

When ordering **BLACK** product add "BK" at end of catalogue number, ie LESWV1GBK

* The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd.

GSM Electrical (Australia) Pty Ltd, the TRADER brand and it's products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

Certification Number:

GMA-507879-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsme.com.au



LEPP1GCBA
LEPPSW1GCBA
LEPP2GCBA
LEPPSW2GCBA
LEPP2USBAUCBA
LESWPV1GCBA
LESWPV2GCBA
LESWPV3GCBA
LESWPV4GCBA
LESWPV5GCBA
LESWPV6GCBA
LESWPVXGCBA

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Brushed Aluminium Covers

- Brushed Aluminium covers provide a great protective upgrade to switches and power points and do not fingerprint as much as other materials while providing a similar look.
- The brushed finish is complemented with the décor of other brushed stainless appliances or looks stylish on other backgrounds.

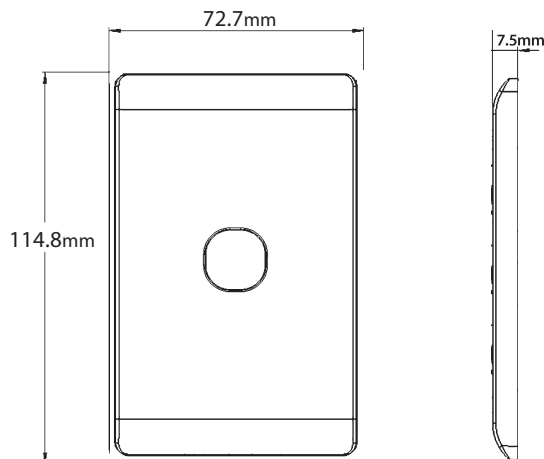

Example of cover plate
LEPPSW1GCBA



Example of cover plate with
LEPPSW1GCBA with LEPPSWV1G



Example of cover plate with
LEPPSW1GCBA with LEPPSWV1GBK

Catalogue Number	Description
LEPP1GCBA	Power Point Switched 1 Gang Cover Only Brushed Aluminium
LEPPSW1GCBA	Power Point Switched 1 Gang with Extra Switch Cover Brushed Aluminium
LEPP2GCBA	Power Point Switched 2 Gang Cover Only Brushed Aluminium
LEPPSW2GCBA	Power Point Switched 2 Gang with Removable Extra Switch Cover Only Brushed Aluminium
LEPP2USBAUCBA	Power Point 2 Gang with Dual USB Cover Only Brushed Aluminium
LESWPV1GCBA	Switch Plate Vertical 1 Gang Cover Only Brushed Aluminium
LESWPV2GCBA	Switch Plate Vertical 2 Gang Cover Only Brushed Aluminium
LESWPV3GCBA	Switch Plate Vertical 3 Gang Cover Only Brushed Aluminium
LESWPV4GCBA	Switch Plate Vertical 4 Gang Cover Only Brushed Aluminium
LESWPV5GCBA	Switch Plate Vertical 5 Gang Cover Only Brushed Aluminium
LESWPV6GCBA	Switch Plate Vertical 6 Gang Cover Only Brushed Aluminium
LESWPVXGCBA	Switch Plate and Cover Brushed Aluminium






LESWVA1G LESWVA2G LESWVA3G

See current catalogue for further detail



Architrave Switches

- Switches are rated 16AX/20A 250V~
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black also stocked - please check availability
- Approved to AS/NZS60669-1
- Typical example of size seen below:





example of cutting template supplied

LESWVA1G



example of cutting template supplied

LESWVA2G

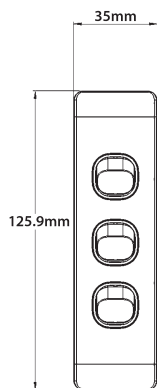

example of cutting template supplied

LESWVA3G

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
LESWVA1G	Switch Vertical Architrave 1 Gang 16AX 20A 250V ac White
LESWVA2G	Switch Vertical Architrave 2 Gang 16AX 20A 250V ac White
LESWVA3G	Switch Vertical Architrave 2 Gang 10AX 16A 250V ac Black

When ordering **BLACK** product add "BK" at end of catalogue number, ie LESWV1GBK

Certification Number:

GMA-507879-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au




LESWDPOV45 LESWDPOV45H

See current catalogue for further detail

Oven Switches

- Switch approved to AS/NZS60669.1:2013
- 45A 250V~, Double Pole
- Includes looping terminals
- Terminal bore 5.8mm diameter
- Cover, plate and dolly is made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Colours available: White, Black, Black/Silver, White/Silver - please check availability

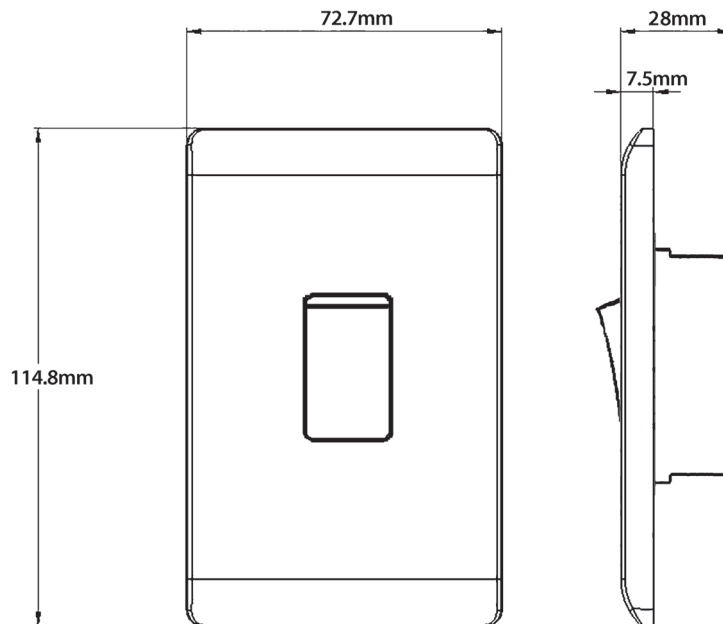

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
LESWDPOV45	Switch Oven 45A 250V ac Double Pole White
LESWDPOV45H	Switch Oven 45A 250V ac Double Pole Horizontal White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LESWDPOV45BK

When ordering **WHITE/SILVER** product add "WSV" at end of catalogue number, ie LESWDPOV45WSV

When ordering **BLACK/SILVER** product add "BKSV" at end of catalogue number, ie LESWDPOV45BKSV

Certification Number:

GMA-514698

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

