




SNPP1GWW SNPP151GWW

See current catalogue for further detail

Single Power Points

- Power points approved to AS/NZS3112
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm².
- Combination head screws for the power point terminals.
- Uses 'Cat Flap' screw covers for IP rating mounting screws.
- Dolly indicator colour green.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Available in Black, White/Silver and Black/Silver - Please check availability.
- Typical example of size seen below:

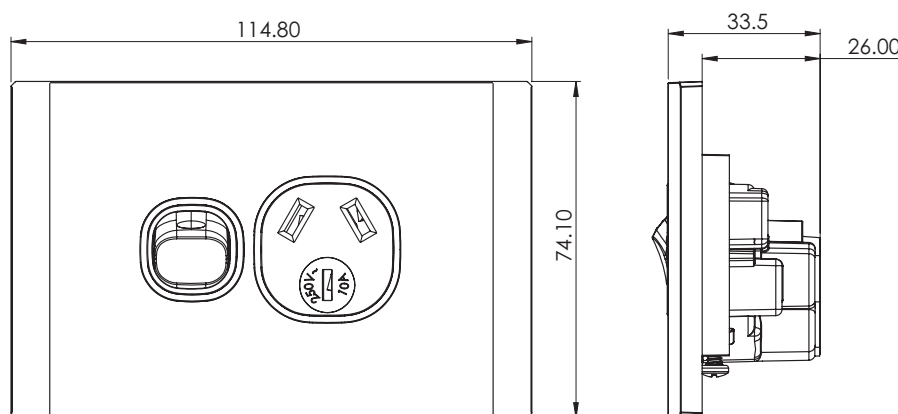

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



June 2026

Catalogue Number	Description
SNPP1GWW	Power Point Switched 1 Gang 10A 250V ac White Cover White Grid
SNPP151GWW	Power Point Switched 1 Gang 15A 250V ac White Cover White Grid

When ordering **BLACK/BLACK** product replace "WW" with "BB" at end of catalogue number, ie SNPP1GBB
 When ordering **BLACK/SILVER** product replace "WW" with "BS" at end of catalogue number, ie SNPP1GBS
 When ordering **WHITE/SILVER** product replace "WW" with "WS" at end of catalogue number, ie SNPP1GWS

Certification Number:

GMA-103194-EA-008

GMA-500347-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au






SNPP2GWW SNPP152GWW SNPPSW2GWW

See current catalogue for further detail

Double Power Points

- Power points approved to AS/NZS3112.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm².
- Combination head screws for the power point terminals.
- Uses 'Cat Flap' screw covers for IP rating mounting screws.
- Dolly indicator colour green.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Available in Black, White/Silver and Black/Silver - Please check availability.
- Typical example of size seen below:

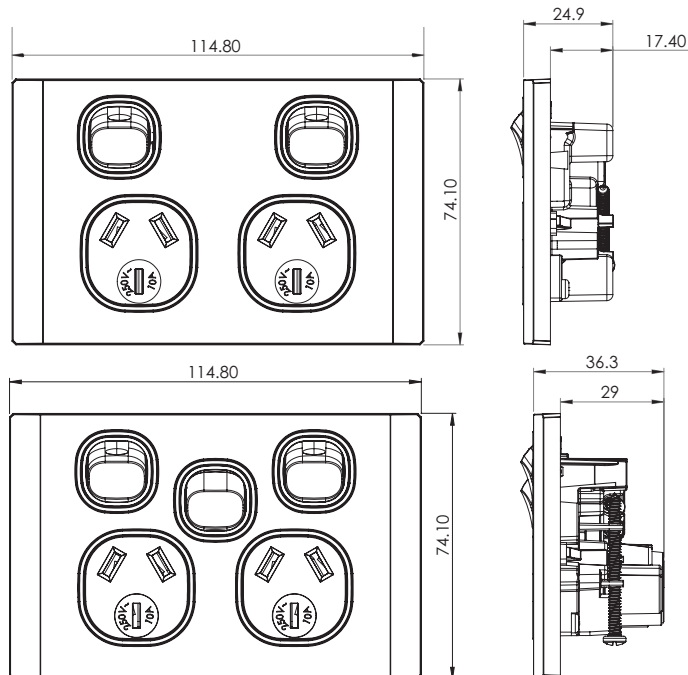

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
SNPP2GWW	Power Point Switched 2 Gang 10A 250V ac White Cover White Grid
SNPP152GWW	Power Point Switched 2 Gang 15A 250V ac White Cover White Grid
SNPPSW2GWW	Power Point Switched 2 Gang 10A 250V ac with Removable Extra Switch 16AX 20A White Cover White Grid

When ordering **BLACK/BLACK** product replace "WW" with "BB" at end of catalogue number, ie SNPP2GBB

When ordering **BLACK/SILVER** product replace "WW" with "BS" at end of catalogue number, ie SNPP2GBS

When ordering **WHITE/SILVER** product replace "WW" with "WS" at end of catalogue number, ie SNPP2GWS

Certification Number:

GMA-500348-EA

GMA-500349-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au





SNPP2USBAUWW

See current catalogue for further detail

Dual USB Charger Power Points

- Power points rated to 10A 250V a.c.
- Warm white LED indicators to show power on status.
- USB outlets rated to 3.4A max total at 5V.
- Auto-Switched power point outlet switches active upon plug insertion/withdrawal.
- Each electrical power point contains shutters activated from the neutral pin.
- The USB circuit is integrated with the power point and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits standard mounting accessories with 84mm centres.
- Terminals suit 3 x 2.5mm².
- Recommended for phone use or small tablet only, larger devices such as laptops with USB C connections require much greater output.
- Standard colour is White, White. Also available in Black, Black - please check availability.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- Typical example of size seen below:



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

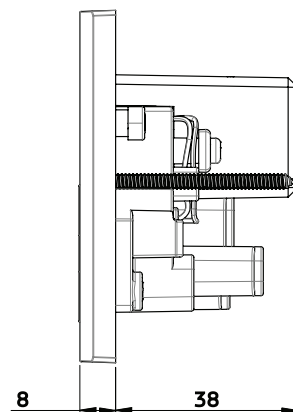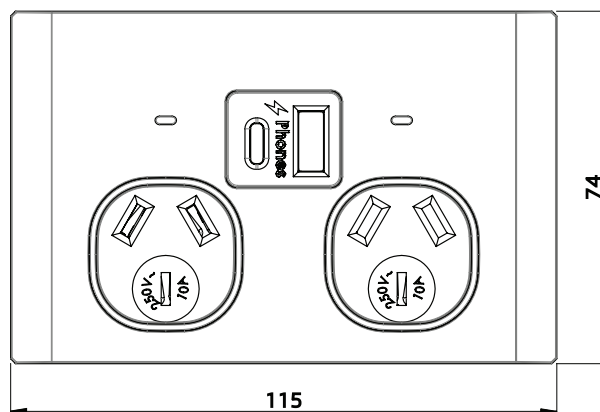

Catalogue Number	Description
SNPP2USBAUWW	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W White Cover White Grid

When ordering **BLACK/BLACK** product replace "WW" with "BB" at end of catalogue number, ie SNPP2GBB

Certification Number:

GMA-508628-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au





Vertical Switches

SNSWV1GWW
SNSWV2GWW
SNSWV3GWW
SNSWV4GWW
SNSWV5GWW
SNSWV6GWW

Horizontal Switches

SNSW1GWW
SNSW2GWW
SNSW3GWW
SNSW4GWW
SNSW5GWW
SNSW6GWW

Switch Plates (Less Mechs)

SNSWVPV1GWW
SNSWVPV2GWW
SNSWVPV3GWW
SNSWVPV4GWW
SNSWVPV5GWW
SNSWVPV6GWW
SNSWVPVXGWW

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Switch Plates


- Switches are rated 16AX/20A 250V~ and approved to AS/NZS60669-1
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Uses 'Cat Flap' screw covers for IP rating or mounting screws
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Available in Black, White/Silver and Black/Silver - Please check availability.
- Plates suit Trader Meerkat MESWC mechs, including TV and Data; and Clipsal 30 Style* mechs and accessories
- Horizontals are available by request
- Typical example of size seen below:



Example of cover plate only / grid and plate only (less mech)



Example of cover plate with MERJ6CM data mech installed

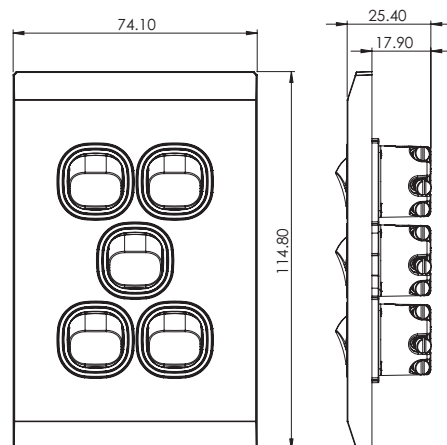

Catalogue No.	Description
SNSW1GWW	Switch Horizontal 1 Gang 16AX 20A 250V ac White Cover White Grid
SNSW2GWW	Switch Horizontal 2 Gang 16AX 20A 250V ac White Cover White Grid
SNSW3GWW	Switch Horizontal 3 Gang 16AX 20A 250V ac White Cover White Grid
SNSW4GWW	Switch Horizontal 4 Gang 16AX 20A 250V ac White Cover White Grid
SNSW5GWW	Switch Horizontal 5 Gang 16AX 20A 250V ac White Cover White Grid
SNSW6GWW	Switch Horizontal 6 Gang 16AX 20A 250V ac White Cover White Grid
SNSWV1GWW	Switch Vertical 1 Gang 16AX 20A 250V ac White Cover White Grid
SNSWV2GWW	Switch Vertical 2 Gang 16AX 20A 250V ac White Cover White Grid
SNSWV3GWW	Switch Vertical 3 Gang 16AX 20A 250V ac White Cover White Grid
SNSWV4GWW	Switch Vertical 4 Gang 16AX 20A 250V ac White Cover White Grid
SNSWV5GWW	Switch Vertical 5 Gang 16AX 20A 250V ac White Cover White Grid
SNSWV6GWW	Switch Vertical 6 Gang 16AX 20A 250V ac White Cover White Grid

Catalogue No.	Description
SNSWVPV1GWW	Switch Plate Vertical 1 Gang Less Mech White Cover White Grid
SNSWVPV2GWW	Switch Plate Vertical 2 Gang Less Mech White Cover White Grid
SNSWVPV3GWW	Switch Plate Vertical 3 Gang Less Mech White Cover White Grid
SNSWVPV4GWW	Switch Plate Vertical 4 Gang Less Mech White Cover White Grid
SNSWVPV5GWW	Switch Plate Vertical 5 Gang Less Mech White Cover White Grid
SNSWVPV6GWW	Switch Plate Vertical 6 Gang Less Mech White Cover White Grid
SNSWVPVXGWW	Blank Plate and Cover White Cover White Grid

The above catalogue numbers where "P" appears in number, refers to Cover Plate Only / Grid and Plate only (less mech)

When ordering **BLACK/BLACK** product replace "WW" with "BB" at end of catalogue number, ie SNPP2GBB
 When ordering **BLACK/SILVER** product replace "WW" with "BS" at end of catalogue number, ie SNPP2GBS
 When ordering **WHITE/SILVER** product replace "WW" with "WS" at end of catalogue number, ie SNPP2GWS

Certification Number:

GMA-507879-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au






SNSWDPOV45WW SNSWDPOV45WWH

See current catalogue for further detail

Oven Switches

- Power points approved to AS/NZS3112.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm².
- Combination head screws for the power point terminals.
- Uses 'Cat Flap' screw covers for IP rating mounting screws.
- Dolly indicator colour green.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Available in Black, White/Silver and Black/Silver - Please check availability.
- Typical example of size seen below:

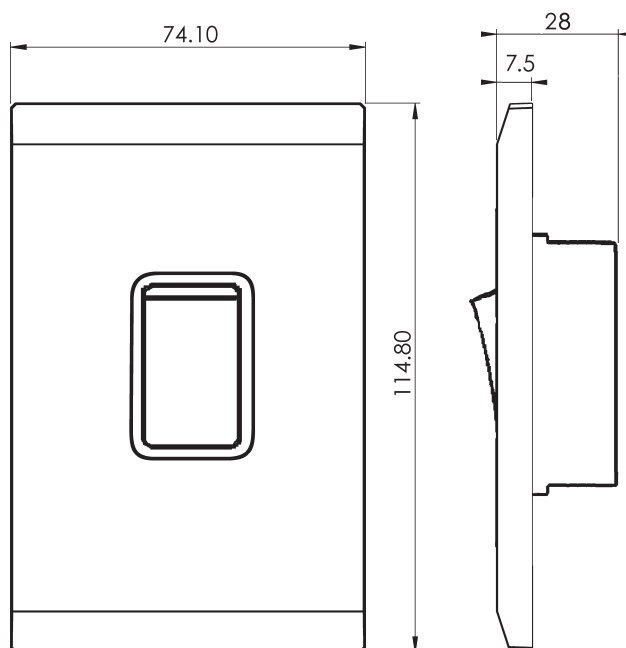

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
SNSWDPOV45WW	Switch Oven 45A 250V ac Double Pole White Cover White Grid
SNSWDPOV45WWH	Switch Oven 45A 250V ac Double Pole White Cover White Grid Horizontal

When ordering **BLACK/BLACK** product replace "WW" with "BB" at end of catalogue number, ie SNPP2GBB

When ordering **BLACK/SILVER** product replace "WW" with "BS" at end of catalogue number, ie SNPP2GBS

When ordering **WHITE/SILVER** product replace "WW" with "WS" at end of catalogue number, ie SNPP2GWS

Certification Number:

GMA-514698

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

