

FLPP2USBAU FLPP2USBAUCC

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 1 of 2




June 2026

Dual USB Charger Power Points

FLPP2USBAU

- Wall plate 4.5mm thick to align with other Flat Cat plates in the range.
- Power points rated to 10A 250V a.c.
- Warm white LED indicator to show power on status.
- USB outlet rated to 3.4A max total at 5V.
- Auto switched power point switches active upon plug insertion/withdrawal.
- Each electrical power point contains shutters activated from the neutral pin.
- Product is approved in accordance with AS/NZS3112.
- USB outlets comply with AS/NZS61558.2.16:2010 A1-3.
- The USB circuit is integrated with the power point and connected internally so only one set of terminals are required for the electrician to wire the device.
- Fits other standard mounting accessories where Flat Cat products are used.
- Terminals suit 3 x 2.5mm².
- Where panels are less than 10mm special recessed mounting accessories must be used.
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Recommended for phone use only, larger devices such as laptops with USB C connections require much greater output.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is White. Also available in Matt White, Black, Matt Black & with Brushed Aluminium Covers (FLPP2USBAUCBA) - please check availability.
- Typical example of size seen below:

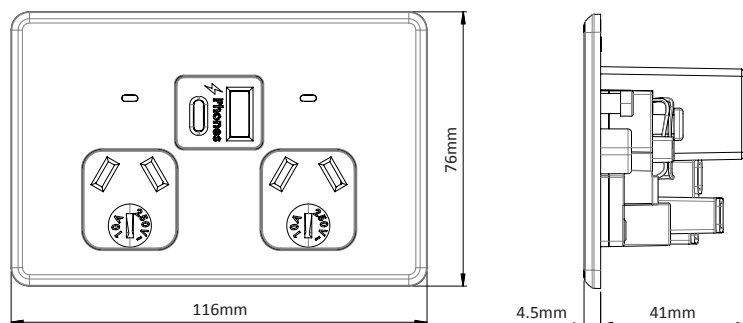

Catalogue Number	Description
FLPP2USBAU	Power Point Auto Switched 2 Gang 10A 250V ac Dual USB Charger Integrated Type A and C PD20W LHS or 5V 3A 18W RHS or Dual 15W White

When ordering **BLACK** product add "BK" at end of catalogue number, ie FLPP2USBAUBK

When ordering **MATT BLACK** product add "MBK" at end of catalogue number, ie FLPP2USBAUMBK

When ordering **MATT WHITE** product add "MW" at end of catalogue number, ie FLPP2USBAUMW

Certification Number:

GMA-528836-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

