

HYMF
HYMFBK
HYMFBP
HYMFMFC
HYMFMFCBK
HYMFMFCMW
HYMFMFCMBK
HYMFCORGY
HYMFCORBK
HYMFCORHGY
HYMFCORHBK

HYMFS
HYMFSBK
HYMFM

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.



Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

PAGE 3 of 3

Mounting Flanges

- HYMFCORGY 14mm shallow mounting flange with 84mm spaced brass metal threaded inserts. Wavelength mounting surface to suit corrugated surfaces with 16mm flutes.
- 2 break out positions for cable or conduit.
- 6 mounting hole position for fixing to walls and panels.
- Designed to mount back boxes for Hippo weatherproof power point HPP2G.
- Made from tough polycarbonate.
- HYMFCORHGY- 26mm shallow mounting flange for mounting 90° orientation to the HYMFCORGY (slightly deeper for mounting screws to clear entries below).
- HYMFCORGY Colour: Grey and Black available.

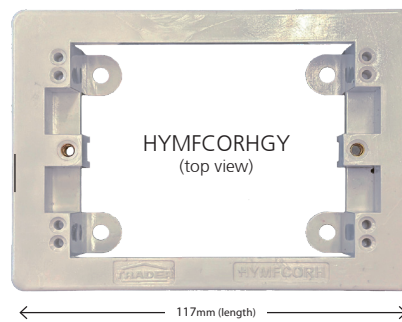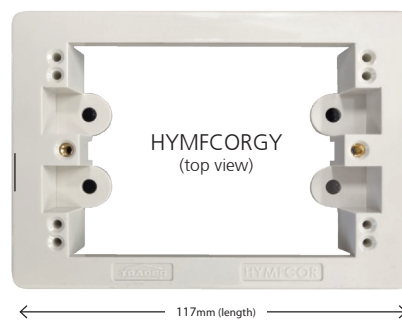

Catalogue Number	Description
HYMFCORBK	Mounting Flange for Corrugated Surface 14mm Depth with 76mm Corrugation Wavelength Black
HYMFCORGY	Mounting Flange for Corrugated Surface 14mm Depth with 76mm Corrugation Wavelength Grey
HYMFCORHBK	Mounting Flange Horizontal for Corrugated Surface 14mm Depth with 76mm Corrugation Wavelength Black
HYMFCORHGY	Mounting Flange Horizontal for Corrugated Surface 14mm Depth with 76mm Corrugation Wavelength Grey

