

LEPPV1G LEPPV2G

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Vertical Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm²
- Combination head screws for the power point terminals
- Dolly indicator colour green
- Covers, plates and dollies made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is White, LEPPV2G comes in Black (LEPPV2GBK) - Please check availability
- Typical example of size seen below:

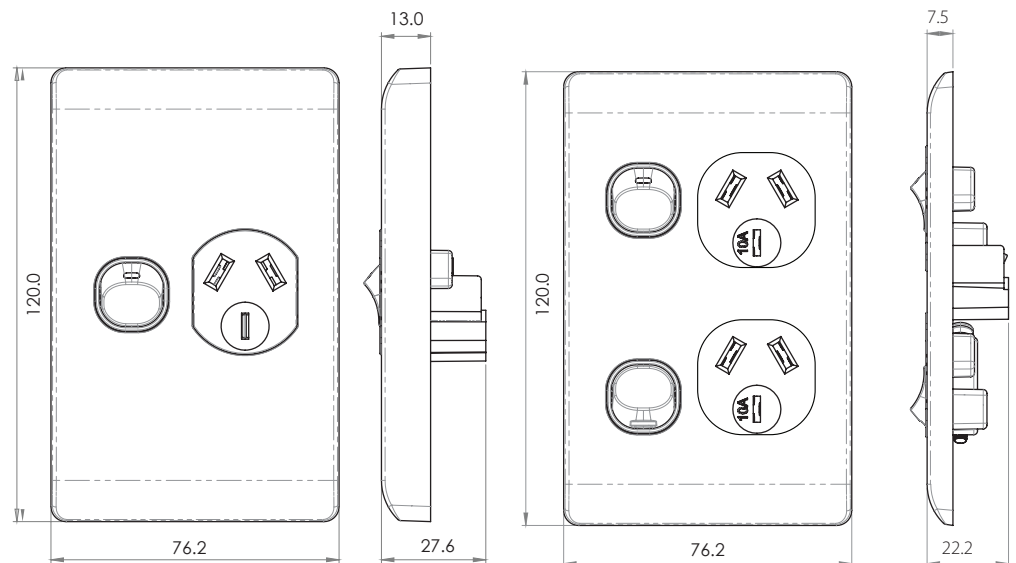

Catalogue Number	Description
LEPPV1G	Power Point Switched Vertical 1 Gang 10A 250V ac White
LEPPV2G	Power Point Switched Vertical 2 Gang 10A 250V ac White

When ordering **BLACK** product add "BK" at end of catalogue number, ie LEPPV2GBK

Certification Number:

LEPPV2G: GMA-501807-EA

LEPPV2G: GMA-513745-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

