



MEPBE

See current catalogue for further detail

BUTTON CAPS:

MEBUMW
MEBUMBK
MEBUC
MEBUCBK
MEBUCSV
MEBUCMW
MEBUCMBK



Push Button Switching

MEPBE Push Button, Electronic On/Off Switch, 3-wire

FEATURES

- Soft touch push button ON/ OFF switch.
- Blue LED indicates device status.
- Returns to OFF after loss of power.
- Compatible with a wide range of load types including wire wound transformers & fan motors.
- Compatible with Trader and Clipsal* Style wall plates.
- Multi-Way Switching when used in conjunction with the MEPBMW Multi-Way Remote Dimmer & ON/OFF Push Button.
- Supplied with MEBU Gloss White & Gloss Black buttons, suits Puma, Cougar & Flat Cat gloss finishes.

OPERATING CONDITIONS

- Operating Voltage: 230 – 240V a.c. 50Hz
- Maximum Load: 1200W / 500VA (see table below)
- Maximum Current Capacity: 5A
- Terminals: Screw Terminals suit 0.5mm² to 1.5mm² stranded cable (bootlace terminal recommended)
- Operating Temperature: 0 to +50 °C
- Compliance Standard: CISPR15, AS/NZS 3100, AS/NZS 60669.2.1

Note: Operation at temperature, voltage or load outside of the specifications may cause permanent damage to the unit.

LOAD COMPATIBILITY

LOAD TYPE	COMPATIBILITY
Incandescent / 240V Halogen	1200W
Fluorescent Tube with Electronic Ballast	500VA
Fluorescent Tube with Iron Core Ballast	500VA
Compact Fluorescent	500VA
Electronic Transformer	500VA
LED	500VA
Wirewound Transformer	500VA
Fan Motors	500VA
Heating Elements	1200W

WHITE, BLACK, SILVER, MATT WHITE & MATT BLACK BUTTONS AVAILABLE:

MEBUMW & MEBUMBK (curved button for Flat Cat), MEBUC & MEBUCBK (flat button for Leopard and Snow Leopard), MEBUCSV (flat button for Snow Leopard Silver finishes) MEBUCMW & MEBUCMBK (flat button for Clouded Leopard matt finishes)



*The Clipsal brand and associated products are Trademarks of Schneider Electric (Australia) Pty Ltd. and used for reference only.

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

WIRING INSTRUCTIONS

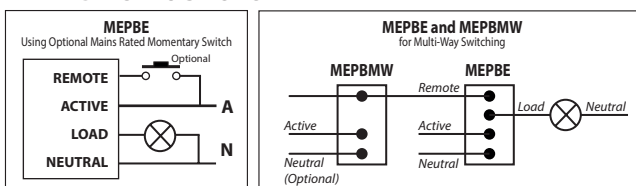

Catalogue Number	Description
MEPBE	Switch Mechanism Push Button Electronic ON OFF 3 Wire Master for MEPB Range Blue LED with White and Black Buttons for Flat Cat, Puma and Cougar
MEBUMW	Button Curved Profile for MEPBE MEPBMW DIMPBD Matt White Suits Flat Cat, Puma and Cougar
MEBUMBK	Button Curved Profile for MEPBE MEPBMBK DIMPBD Matt Black Suits Flat Cat, Puma and Cougar
MEBUC	Button Flat Profile for MEPBE MEPBMW DIMPBD White Suits Senoa Simple, Snow Leopard and Leopard
MEBUCBK	Button Flat Profile for MEPBE MEPBMW DIMPBD Black Suits Senoa Simple, Snow Leopard and Leopard
MEBUCMW	Button Flat Profile for MEPBE MEPBMW DIMPBD Matt White Suits Clouded Leopard
MEBUCMBK	Button Flat Profile for MEPBE MEPBMW DIMPBD Matt Black Suits Clouded Leopard

Certification Number:

GMA-517635-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

