


PUPP1G PUPP151G PUPP201G PUPPSW1G PUPPV1G PUPP1GL

See current catalogue for further detail

Single Power Points

- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Switches approved to AS/NZS3133.
- Power points approved to AS/NZS3112.
- Typical example of size seen below:

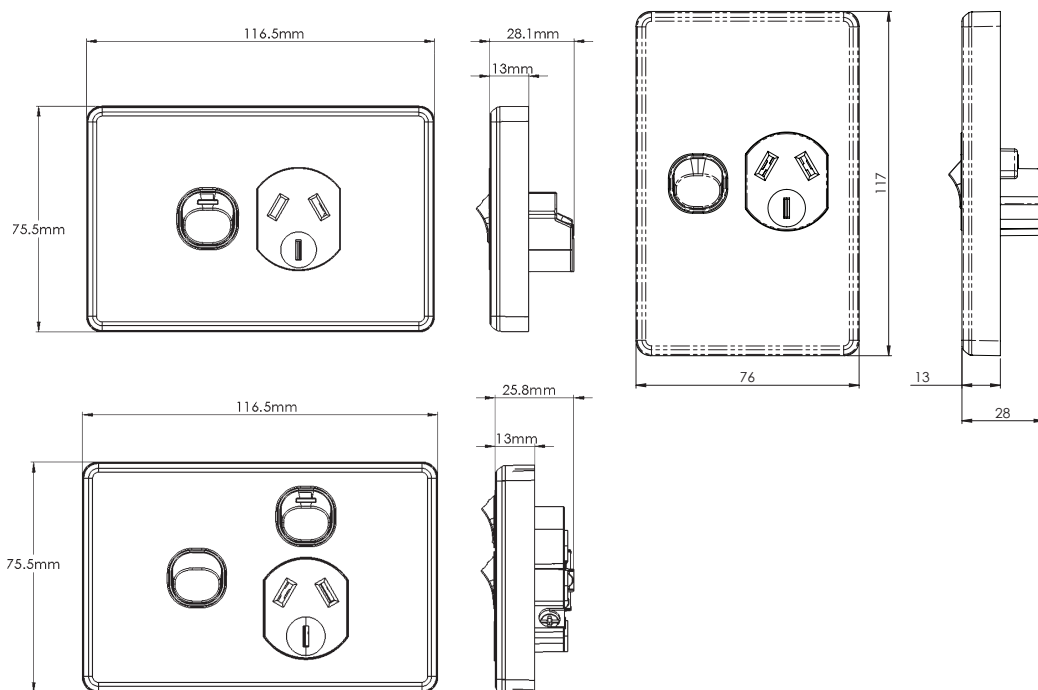

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Catalogue Number	Description
PUPP1G	Power Point Switched 1 Gang 10A 250V ac White
PUPP151G	Power Point Switched 1 Gang 15A 250V ac White
PUPP201G	Power Point Switched 1 Gang 20A 250V ac White
PUPPSW1G	Power Point Switched 1 Gang 10A 250V ac with Extra Switch 10AX 16A White
PUPPV1G	Power Point Switched Vertical 1 Gang 10A 250V ac White
PUPP1GL	Power Point Switched 1 Gang 10A 250V ac with Lighting Pin White

When ordering BLACK product add "BK" at end of catalogue number, ie PUPP1GBK

When ordering BRUSHED ALUMINIUM (cover) add "CBA" at end of catalogue number, ie PUPP1GCBA

When ordering REPLACEMENT "COVERS ONLY" add "CO" at end of catalogue number, ie PUPP1GCO

Certification Number:

PUPP1G: GMA-509981-EA

PUPP151G: GMA-509981-EA

PUPPSW1G: GMA-501109-EA

PUPPV1G: GMA-501807-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsme.com.au

