

PUPP2G PUPP152G PUPPSW2G PUPPSWX2G PUPPV2G

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.


It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Double Power Points

- Switches approved to AS/NZS3133
- Power points approved to AS/NZS3112
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Black also stocked - please check availability.
- Typical example of size seen below:

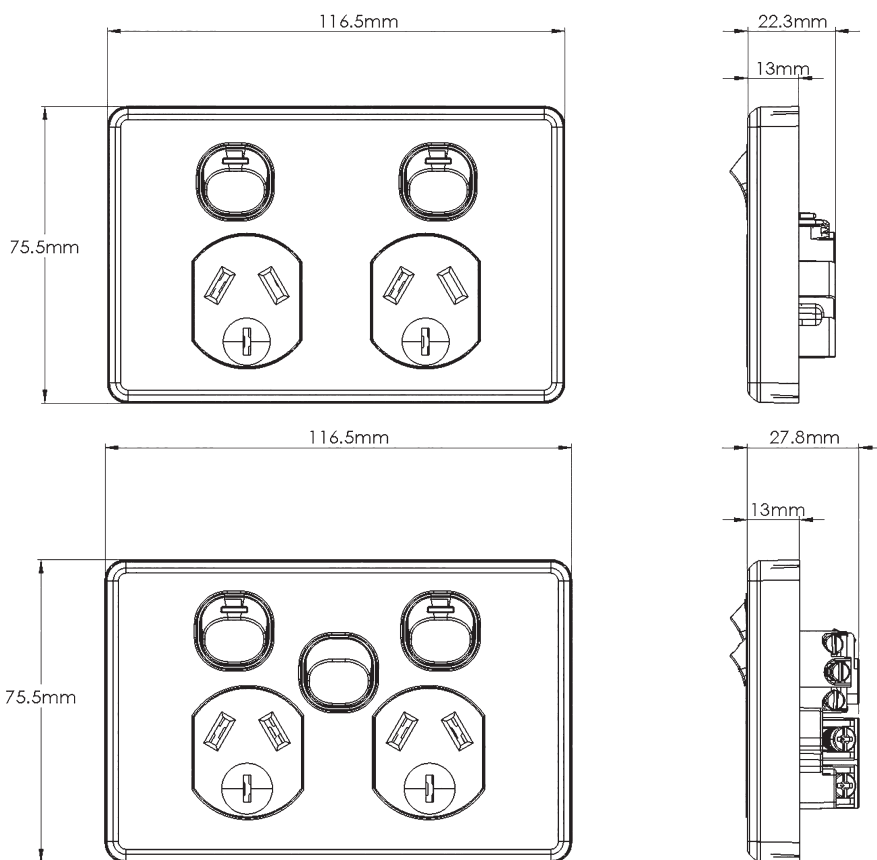

Catalogue Number	Description
PUPP2G	Power Point Switched 2 Gang 10A 250V ac White
PUPP152G	Power Point Switched 2 Gang 15A 250V ac White
PUPPSW2G	Power Point Switched 2 Gang 10A 250V ac with Extra Switch 10AX 16A White
PUPPSWX2G	Power Point Switched 2 Gang 10A 250V ac with Extra Switch Less Mech White
PUPPV2G	Power Point Switched Vertical 2 Gang 10A 250V ac White

When ordering BLACK product add "BK" at end of catalogue number, ie PUPP2GBK

When ordering BRUSHED ALUMINIUM (cover) add "CBA" at end of catalogue number, ie PUPP2GCBA

When ordering REPLACEMENT "COVERS ONLY" add "CO" at end of catalogue number, ie PUPP2GCO

Certification Number:

PUPP2G: GMA-508660-EA

PUPP152G: GMA-500830-EA

PUPPSW2G: GMA-501260-EA

PUPPV2G: GMA-501806-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

