


PUPP2GVPLB

See current catalogue for further detail

Vandal Proof Double Power Points With Label Windows

- Power points have Shutters and are Double Pole.
- Oval screw caps for extra adjustment on wall (no removable cover).
- Uses brass tunnel terminals that have the screws backed out for easier installation. of cabling. Power point terminals have 5.7mm bore to suit 4 x 2.5mm² cable.
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres.
- Plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Label cap system allows marking to be applied to removable inserts. These are then securely covered by the mounting window cover at the time of installation.
- Power points achieve IK09 to IEC62262:2002.
- Standard colour is white.
- Shutter operates from either earth or neutral
- Power points approved to AS/NZS3112.
- Typical example of size seen below:

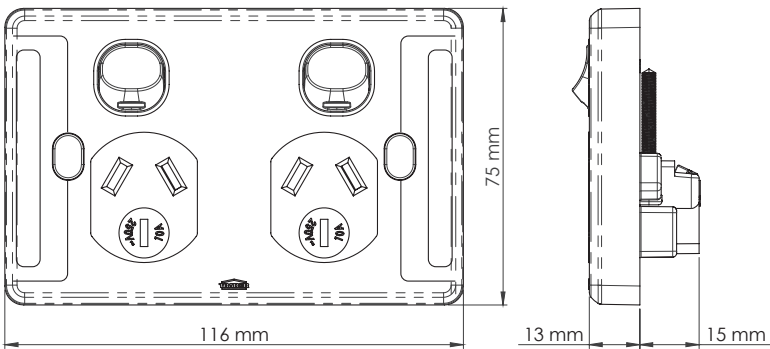

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Catalogue Number	Description
PUPP2GVPLB	Power Point Switched 2 Gang Double Pole Shuttered 10A 250V ac Vandal Proof with Label Windows White

Certification Number:
GMA-505204-EA
GSM Electrical (Australia) Pty Ltd
5-9 Rundle Street, Kent Town SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

