PUMA™

TRADER®

Vertical Switches

PUSWV1G66
PUSWV2G66
PUSWV3G66
PUSWV4G66
PUSWV4G66FLHH

Horizontal Switches

PUSW1G66
PUSW2G66
PUSW3G66
PUSW4G66
PUSW4G66FLHH

See current catalogue for further detail

IP66 Switch Plates

- Trader IP66 rated flush switches have been designed to achieve IP66 on a smooth, flat, non- porous surface, from the front of the switch only.
- The switches are compatible with mounting hardware for standard 84mm mounting centre wallplates.
- IP Rating : IP66 (from front only).
- Voltage Rating: 250V a.c
- Current Rating: 10AX.
- Motor Rating: M100
- No provision has been made to prevent water and dust entering from behind the switch.
- Care should be taken when mounting, to ensure that water and dust cannot bypass the gasket and come in contact with live parts.
- Ensure that the mounting surface is completely flat, smooth and non-porous.
- Make sure the rear gasket seal is located in its correct position. – Use the silicone washer.
- Clip on front cover/surround.
- Standard colour is white. PUSWV4G66 & PUSW4G66 also available in Black & Matt Black - please check availability.

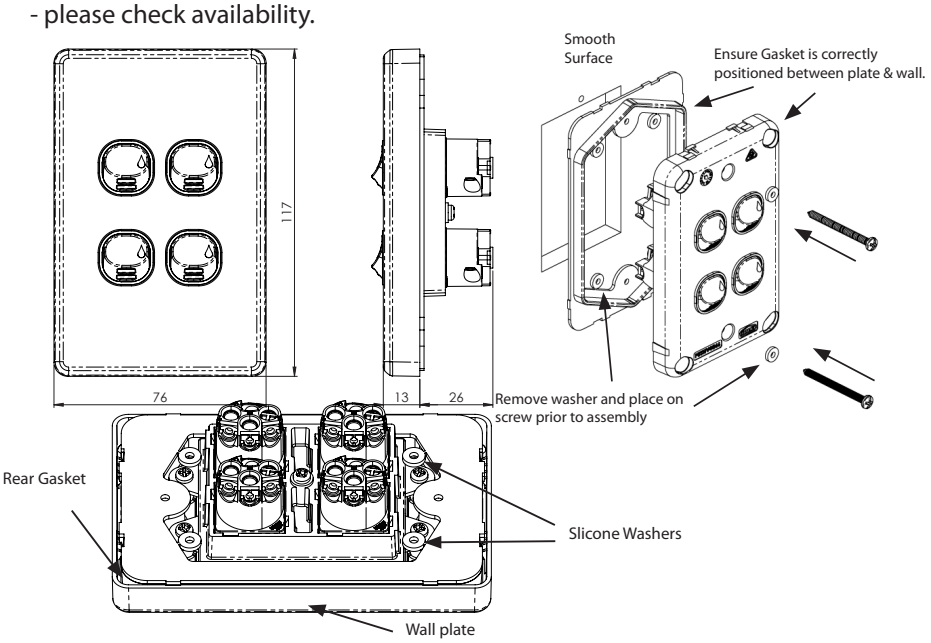

Catalogue Number	Description
PUSW1G66	Switch Horizontal 1 Gang 10AX 250V ac IP66 White
PUSW2G66	Switch Horizontal 2 Gang 10AX 250V ac IP66 White
PUSW3G66	Switch Horizontal 3 Gang 10AX 250V ac IP66 White
PUSW4G66	Switch Horizontal 4 Gang 10AX 250V ac IP66 White
PUSW4G66FLHH	Switch Horizontal 4 Gang 10AX 250V ac IP66 Mechs Labelled FAN LIGHT HEAT HEAT White
PUSWV1G66	Switch Vertical 1 Gang 10AX 250V ac IP66 White
PUSWV2G66	Switch Vertical 2 Gang 10AX 250V ac IP66 White
PUSWV3G66	Switch Vertical 3 Gang 10AX 250V ac IP66 White
PUSWV4G66	Switch Vertical 4 Gang 10AX 250V ac IP66 White
PUSWV4G66FLHH	Switch Vertical 4 Gang 10AX 250V ac IP66 Mechs Labelled FAN LIGHT HEAT HEAT White

When ordering BLACK product add "BK" at end of catalogue number, ie PUSWV4G66BK
When ordering MATT BLACK product add "MBK" at end of catalogue number, ie PUSWV4G66MBK

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Certification Number:
GMA-508434-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

100% AUSTRALIAN OWNED & OPERATED

10 Yr Warranty