

PUSWVA1GVP PUSWVA2GVP

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.




It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).




Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Vandal Proof Architrave Switches

- Switches are rated 10AX/16A 250V~ and approved to AS/NZS60669-1
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1mm bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black also stocked - please check availability.
- Typical example of size seen below:

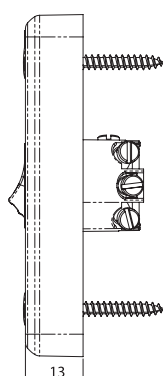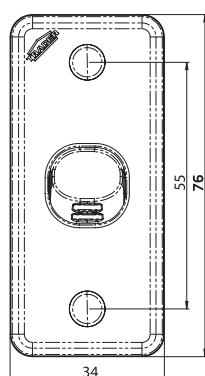

example of
cutting template
PUSWVA1GVP

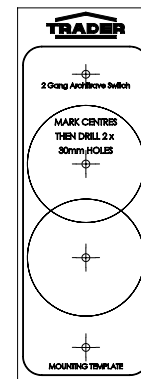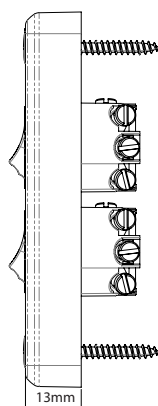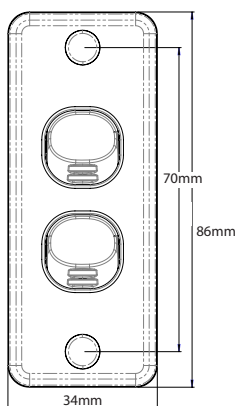

example of
cutting template
PUSWVA2GVP

Catalogue Number	Description
PUSWVA1GVP	Switch Vertical Architrave 1 Gang 10AX 16A 250V ac Vandal Proof White
PUSWVA2GVP	Switch Vertical Architrave 2 Gang 10AX 16A 250V ac Vandal Proof White

When ordering **BLACK** product add "BK" at end of catalogue number, ie PUSWVA1GVPBK

Certification Number:

GMA-508434-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

