

SCDL2

See current catalogue for further detail

Interchangeable shells available:

SCDL2SSV


(Shell - Silver)

SCDL2SBK

(Shell - Black)

SCDL2L

(Shell - Large)

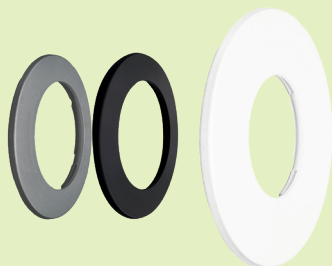

Dimming

The Scorpion Downlights have been designed for optimum performance with our Dimpala range of dimmers:

DIMR - Dimpala Universal Eclipse Dimmer //

DIMPRX - Dimpala Push Rotary Dimmer No

Glow // DIMPR - Dimpala Push Rotary Dimmer

Please refer to our Website or Catalogue for further detail and accessories

Note: In some regions a slight flicker may occur when the luminaire is dimmed. This could be due to power line signals sent by electricity supply utilities. This effect is not a malfunction of the luminaire or dimmer but could be a result of local power supply changes. If this occurs at any stage adjusting the dimmer back to maximum output should minimise the effect.

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.







LED Downlight 8W

- Dimmable
- Colour Selectable - CCT 3 (see chart)
- Body colour is green
- Shell standard colour is white
- Interchangeable shells available in Black (SCDL2SBK)
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- Warranty covers 5 Years Residential & 3 Years Commercial

Product Specification

Part Code	SCDL2
Colour Temp	3000K 4000K 5700K
Lumen Output	750lm
IP Rating	IP44 (from front only) IP20 (from rear)
Power	8W
Beam Angle	110°
CRI	>85
Voltage Rating	220-240V~ 50Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C (IC-4@ ta 25°C)
Electrical Class	Class II

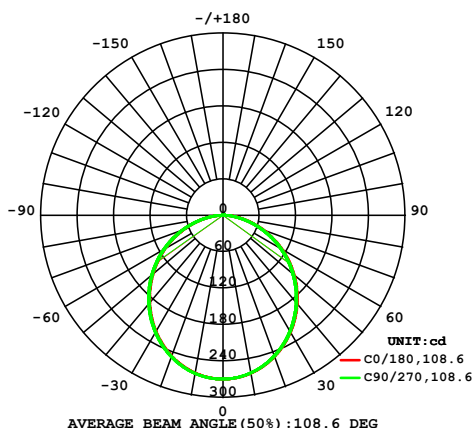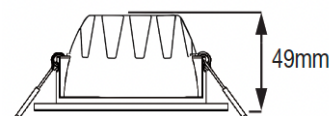

SCDL2L large shell enables to usage of the SCDL2 to fit ceiling apertures that are larger as a replacement from other lighting. Remove the existing shell and replace with the SCDL2L with the maximum diameter of the shell of 145mm, so enables effective coverage of ceiling holes from 90mm to maximum 140mm with the assembly.

Catalogue Number	Description
SCDL2	Downlight LED 8W 750LM Tri Colour Temperature WW CW DL 90mm Cut Out Dimmable
SCDL2SSV	Downlight LED Shell Only Silver Suits SCDL2
SCDL2SBK	Downlight LED Shell Only Black Suits SCDL2
SCDL2SL	Downlight LED Shell Large Only White for use with SCDL2

Certification Number:

GMA-517509

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

