

SCDLGOLD

See current catalogue for further detail


LED Downlight 9W Adjustable Gimbal, Dim to Warm

- Dimmable
- Colour Selectable
- Body colour is green
- Shell colour is white/green
- IC-4 rated can be covered and abutted - See instructions
- Flex and Plug - cable length 1.2 metres for easier installations
- Integrated driver
- Diffused lens
- Shell colour white only with green cap
- Separate driver
- Adjustable gimbal
- Dim to warm 2000K - 3000K
- Warranty covers 5 Years Residential & 3 Years Commercial



Product Specification

Part Code	SCDLGOLD
Colour Temp	2000-3000K
Lumen Output	680lm ± 5%
IP Rating	IP44 (from front only)
Power	9W
Beam Angle	65°
CRI	>95
Voltage Rating	220V-240V~ 50/60Hz
LED Lamp Life (L70)	30,000 Hrs
Dimmable	Yes
Operating Temp	-10°C to 40°C
Electrical Class	Class II
Ambient	ta 40°C

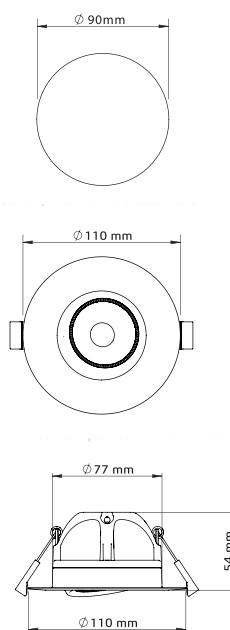

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

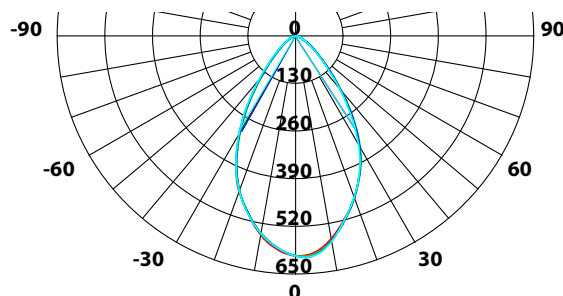

Catalogue Number	Description
SCDLGOLD	Downlight LED Dim to Warm 9W 680LM 90mm Cut Out Adjustable Gimbal Separate Driver Dimmable to 5 Percent Warm

Certification Number:

GMA-506854

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

