





SCFL50F

See current catalogue for further detail

LED Floodlight, Frameless

Product Specification

Part Code	SCFL50F
Lumen Output	4500lm
Power	50W
Weight	1.100kg
Voltage Rating	220- 240V~ 50Hz
Colour Temp	4000K
IP Rating	IP65
LED Lamp Life (L70)	20,000Hrs
Beam Angle	110°
CRI	>70
Cable Length	900mm
Operating Temp	-10°C to 40°C ta. 40°C
Electrical Class	Class I
Product colour	Black
Fascia colour	Black with black frame
Installation	Locking hinge bracket
Warranty	Two (2) Years
Dimensions L x W x H (mm) (refer diagram below)	235 x 36 x 163

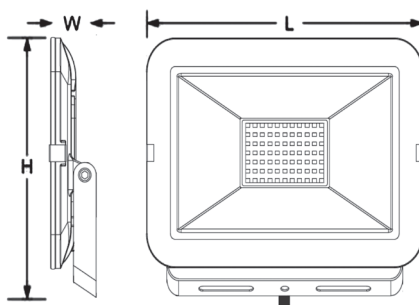

Cleaning Guide:


Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Photometric B Plane Distribution Diagram

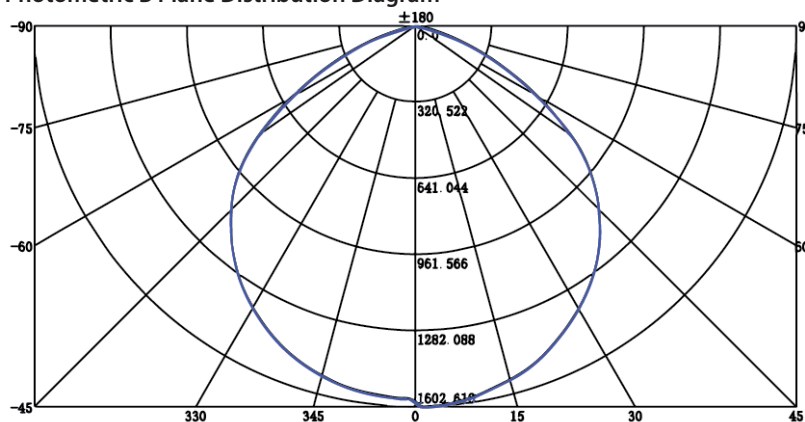

Catalogue Number	Description
SCFL50F	Floodlight LED Slimline 50W 4500LM 4000K IP65 Frameless

Certification Number:

GMA-516004

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsm.com.au

www.gsm.com.au

