

SCSPSENSOR SCSPSENSORBK

See current catalogue for further detail

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.



Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.





Sensor for Twin Spotlight (SCSP24TWIN and SCSP24TWIN)

- Lux Setting: <10-2000Lux (adjustable)
 - Time delay: 10sec (±3sec) – 12min (±3min)
 - 2-12m Detection zone (adjustable)
 - 180° Detection zone
 - 0.6 – 1.5m/s Detection Speed
 - Recommended Installation height: 1.8-2.5m
 - IP Rating: IP54
- Note: Sensor is IP54 rated once correctly installed as per instructions.
- Available in White and Black
 - Compatible as an upgrade for SCSP24TWINBK

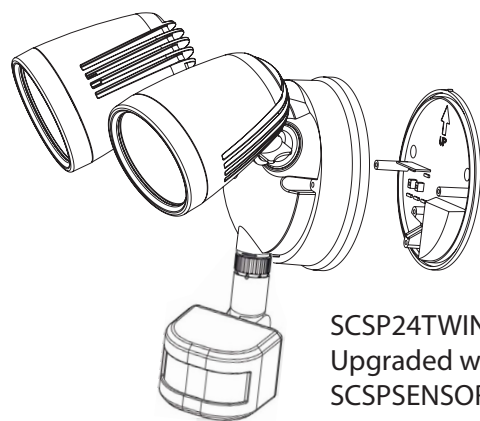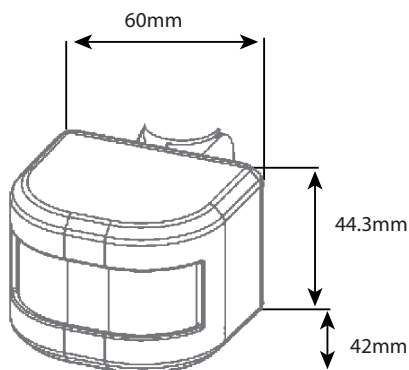

SCSP24TWIN/BK
Upgraded with
SCSPSENSOR/BK

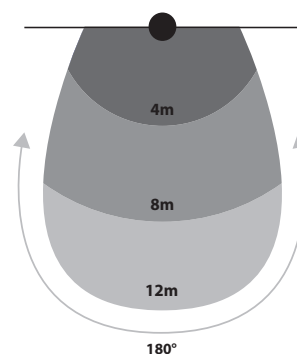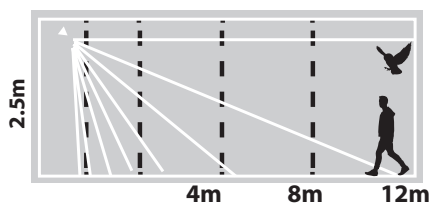

Catalogue Number	Description
SCSP24TWIN	Spot Light LED Twin 24W Tri Colour Temperature 3K 4K 5K Upgradeable with PIR Sensor SCSPSENSOR
SCSP24TWINBK	Spot Light LED Twin 24W Tri Colour Temperature 3K 4K 5K Upgradeable with PIR Sensor SCSPSENSORBK Black

Certification Number:
GMA-515501

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 | E: service@gsme.com.au
www.gsme.com.au

