




SNPP1GWW SNPP151GWW

See current catalogue for further detail

Single Power Points

- Power points approved to AS/NZS3112
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Power point terminals have 6mm bore to suit 4 x 2.5mm² cable. Switch terminals have 4.1mm suit 4 x 1.5mm².
- Combination head screws for the power point terminals.
- Uses 'Cat Flap' screw covers for IP rating mounting screws.
- Dolly indicator colour green.
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow.
- Standard colour is white. Available in Black, White/Silver and Black/Silver - Please check availability.
- Typical example of size seen below:

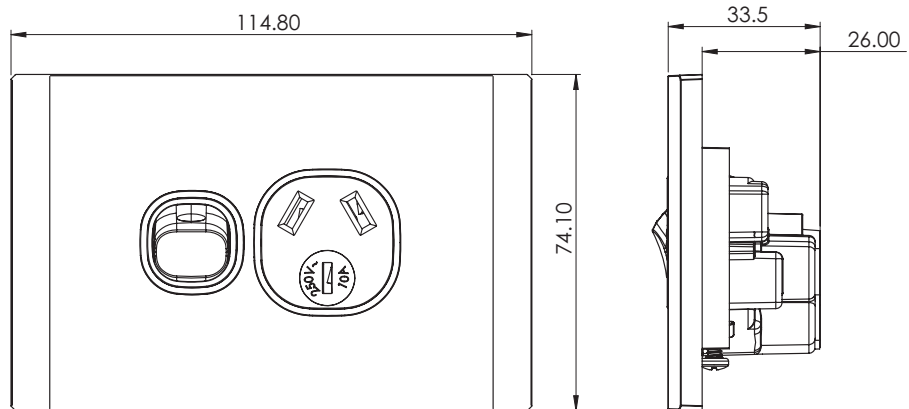

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



June 2026

Catalogue Number	Description
SNPP1GWW	Power Point Switched 1 Gang 10A 250V ac White Cover White Grid
SNPP151GWW	Power Point Switched 1 Gang 15A 250V ac White Cover White Grid

When ordering **BLACK/BLACK** product replace "WW" with "BB" at end of catalogue number, ie SNPP1GBB

When ordering **BLACK/SILVER** product replace "WW" with "BS" at end of catalogue number, ie SNPP1GBS

When ordering **WHITE/SILVER** product replace "WW" with "WS" at end of catalogue number, ie SNPP1GWS

Certification Number:

GMA-103194-EA-008

GMA-500347-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au

