

TAP310SE TAP315SE

See current catalogue for further detail

Side Entry Sockets

- Transparent housing for easy to see wiring connections
- Rigid body format for secure fitment & gripping.
- Rear cord entry and cable insulation grip.
- Insulated pins in accordance to AS/NZS3112
- Internal cable clamp to support electrical connections.
- Suitable for 0.75mm² heavy duty and 1.0mm² ordinary flexible cords.
- Standard cable sheath accomodation Ø7mm²



Catalogue Number	Amp	Pin Config.
TAP310SE	10	A
TAP315SE	15	B


Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

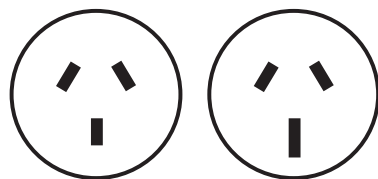

A
10A 250V~
3 Pin

B
15A 250V~
3 Pin

Catalogue Number	Description
TAP310SE	Plug Top 3 Pin 10A 250V ac Side Entry Transparent
TAP315SE	Plug Top 3 Pin 15A 250V ac Side Entry Transparent

Certification Number:

GMA-525239-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 | E: service@gsme.com.au

www.gsme.com.au



June 2026

