


WOBBC25

*See current catalogue for further detail



Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended. It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Busbar Accessories


OVERVIEW OF WOLVERINE BUSBAR CONNECTOR

The Wolverine Busbar Connector WOBBBC25 is a precision-engineered busbar connector specifically designed to provide reliable electrical distribution in a wide range of industrial, commercial, and residential applications. As an essential component in electrical distribution assemblies, these busbar connectors deliver superior performance by facilitating efficient power distribution while maintaining optimal safety standards.

Busbar connectors assist in ease of connection to modern electrical distribution systems, providing a standardized method for connecting RCBOs and MCBs to a common distributed power source. The WOBBBC25 is a fundamental component with premium materials and that ensures consistent performance even under demanding conditions and provides an ideal termination point.

KEY FEATURES AND BENEFITS OF WOLVERINE BUS BAR CONNECTORS

- **Current capacity:** Engineered to handle substantial current loads of 63A, making these connectors suitable for both residential and commercial electrical systems, capable of terminating 25mm².
- **Superior Insulation:** Premium PVC outer casing provides excellent electrical insulation properties.
- **Operational Stability:** Consistent performance characteristics ensure reliable operation throughout the product's extended service life.
- **Installation Efficiency:** Designed for straightforward installation, reducing install time.
- **Enhanced Conductivity:** High-quality copper connection tongue combined with brass terminal delivers exceptional electrical conductivity.
- **Tongue dimensions:** 2.0mm thick X 4.0mm wide x 20.8mm long from insulation
- **Cable capacity:** 6.6mm diameter bore for 25mm²
- **Nickel plate finish:** for environmental protection
- **Versatility:** designed to suit the tongue type connector RCBO terminals as well as clamping in standard terminals that suit fork style busbar assemblies

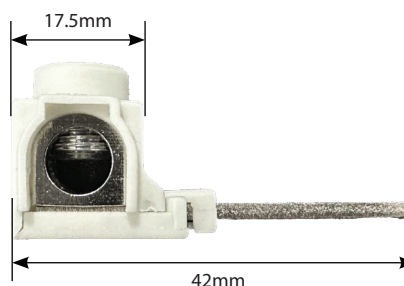

Catalogue Number	Description
WOBBC25	Busbar Connector 25mm ² Pack of 4