

WOSBWPM5 WOSBWPM10

*See current catalogue for further detail



WOSBWPM10



WOSBWPM5



Wolverine Outdoor Switchboards

- The WOSBWPM5 and WOSBWPM10 are designed for outdoor surface mounting use only and intended for use to accommodate circuit protection devices such as circuit breakers; RCDs, isolating switches, surge/over-voltage protection and other such products.
- They are intended for use in domestic or commercial applications.
- They MUST be installed by a licensed electrician and follow AS/NZS3000 wiring rules.
- They comply and have been tested in accordance with AS/NZS61439.3
- IP65 from the front surfaces when mounted to AS 60529.
- Ipk: 17kA for the enclosure assembly.
- Class 2 assembly.
- 100A rated assembly and contains Neutral and Earth bars with single row of screws complying with AS/NZS 3000 clause 3.7.2.11 for screw to tunnel ratio for earthing.
- Parts pack includes 80A rated bus bar, sticker labelling pack in red and green for non-RCD protected and RCD protected circuit identification, pole fillers (full and half DIN module sizes)
- Sticker labelling pack available separate **WOSBSP**.

INTERFACE CHARACTERISTIC

Voltage ratings

- Rated voltage (Un): 415V
- Rated operational voltage (Ue): 415V
- Rated insulation voltage (Ui): 1000V
- Rated impulse withstand voltage of assembly (Uimp): 4000V
- Complies with minimum overvoltage category III according IEC 60364-4-44

Current ratings

- Rated current of the ASSEMBLY (InA) : 100A
- Rated peak withstand current (Ipk): 17kA
- Rated conditional short-circuit current of an ASSEMBLY (Icc): 10kA

Rated diversity factor (RDF) 1-0.9

Rated frequency (fn) 50Hz

Pollution degree: 2

Fixed stationary installation.

Mechanical impact protection: IK07

For protection against electric shock requires screws to be removed to access live parts.

Type B distribution board

The rating of loose busbars. 80A end fed or 100A centre feed.

Neutral link rating : 100A

Cover screws contain special earthing features and must be securely fastened.

Overall dimensions:


5 module: 153mm(w) x 232mm(h) x 100mm(d)

10 module: 243mm(w) x 232mm(h) x 100mm(d),


Weight:

5 module: 1.51kg,

10 module: 2.09kg

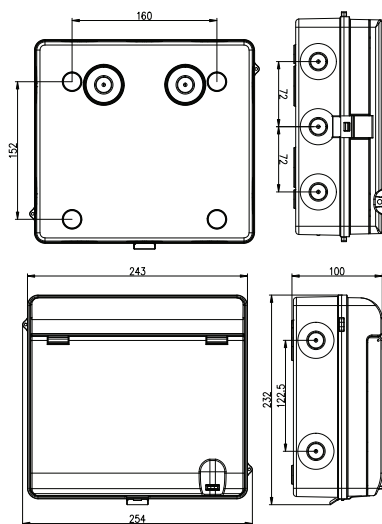

WOSBWPM10

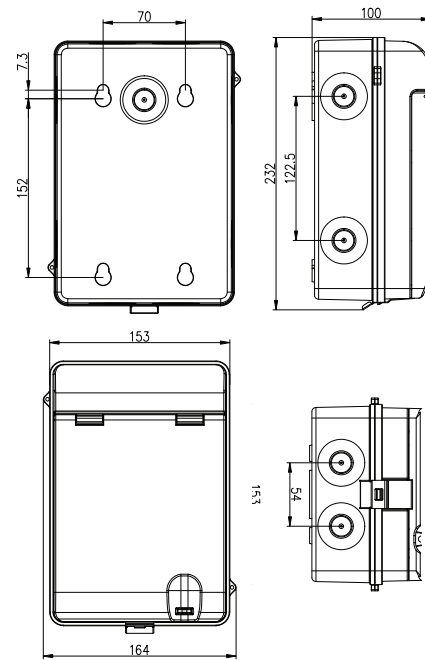

WOSBWPM5

Catalogue Number	Description
WOSBWPM5	Switchboard Surface Mount Weatherproof Metal 5 Way 100A 415V ac IP65 Grey
WOSBWPM10	Switchboard Surface Mount Weatherproof Metal 10 Way 100A 415V ac IP65 Grey

Certification Number:

GMA-526003

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
May 2026