



Surface Socket "QC" 250V~ 10A Three Pins




'End Cable' Connection Installation Instructions

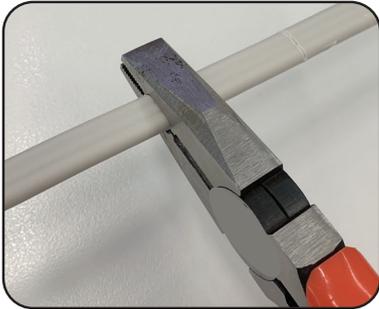


1. Use suitable stripping tool to remove the outer sheath as shown.

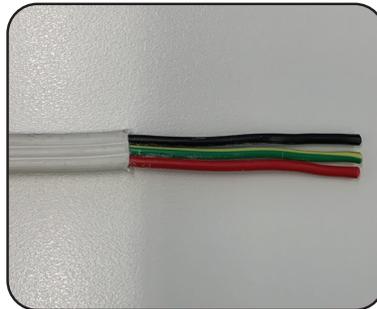


2. For end connection, strip 70mm of cable as shown in image.

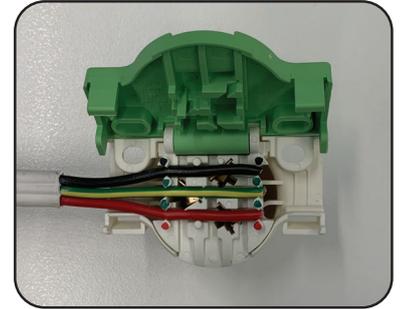

3. Place cable ends into pockets and lay back into corresponding coloured trenches.

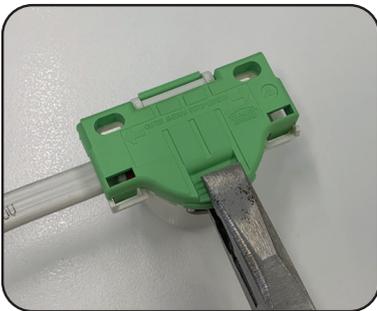

4. Clamp cover shut using appropriate pliers to provide secure electrical connection.

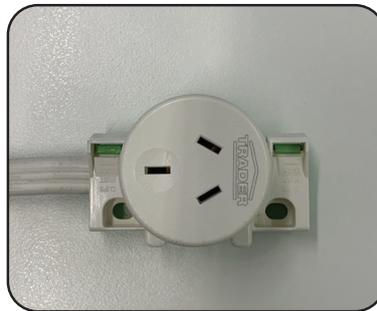

5. Green clips should be snapped in to correct position (as shown) when fully terminated.


'Mid Cable' Connection Installation Instructions




1. Strip length of 46mm is shown on the rear cover.




2. Use suitable stripping tool to remove the outer sheath as shown.

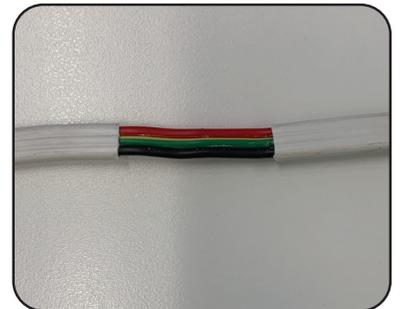


3. For a mid cable connection, it should appear as shown in the image.

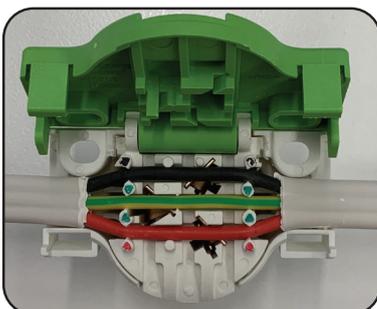

4. Place stripped cable in trenches for corresponding colours in the HYPP1GQC as shown.

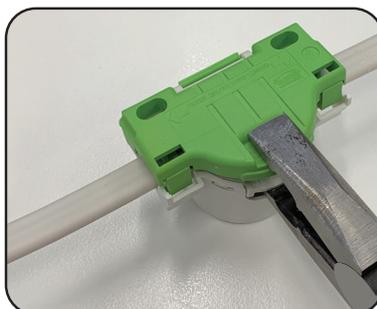

5. Clamp cover shut using appropriate pliers to provide secure electrical connection.

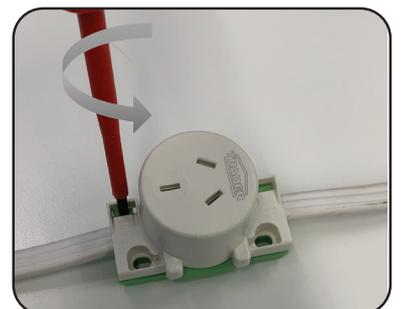

6. Green clips should be snapped in to correct position as shown when fully terminated. To remove, place screwdriver in position as shown and twist to unclip and open the rear cover.