

HPISW120
HPISW120BK
HPISW220
HPISW220BK
HPISW240
HPISW240BK

*See current catalogue for further detail



Example of internal
HPISW120 switch
(base mounted)



Example of cover
mounted switch
HPISW220

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Hippo Range Heavy Duty Isolators

- HPISW220 – 20A 250V ~ rated modular weatherproof switch
- HPISW240 – 40A 250V~ rated modular weatherproof switch
- Improved Double Pole switching mechanism performance and design in comparison to HPSSWCDP220 & HPSSWCDP235
- The Hippo product is made from UV Stabilised Polycarbonate to avoid discolouring
- IP66 ideal for prevention against water or harmful objects that may compromise conventional light switches. Perfect for use in exterior applications, or damp/dusty environments such as building exteriors, carports, gardens or workshops
- Back mounting boxes that contain 20mm and 25mm plain entries
- Cover mounted switches for easier wiring and access
- Corner mounting screws for cover allows full rotation for access to different entry combinations
- Double pole as standard format only.
- M220 (40A Model)
- M160 (20A Model)
- Lock off facility
- Full AC23A rating performance for inductive motor applications
- Colour is Grey. Also available in Black by request. Please check availability.
- Note:

The HPISW120 and (BK) models are a base mounted single pole Isolators that performs in accordance with AS/NZS 3133 with motor rating of M100, this model doesn't use the corner mount screw system as the others and requires the base to be aligned in correct orientation when installing. Please see the specifications for performance in the table below.

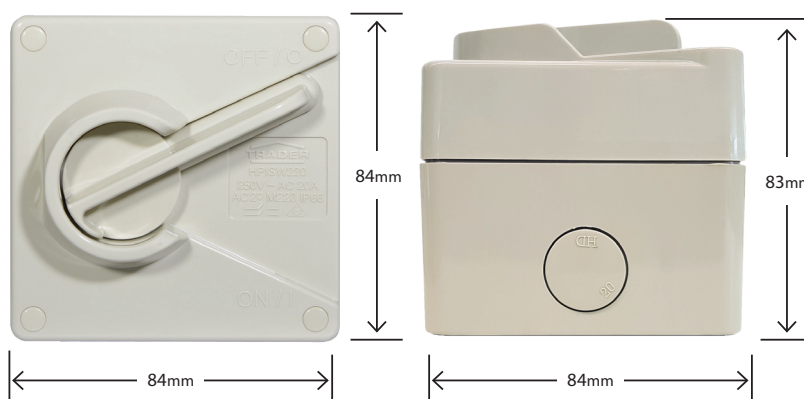

Hippo Isolator part number	No. of poles	Current rating	Voltage	Utilization category	Motor Rating	IP Rating	Top Entries	Bottom Entries	Terminal screw drive	Terminal hole size	Padlock hole	Width	Height	Depth
HPISW120	1	20A	250V ac	—	M100	IP65	2 x 25mm Plain	2 x 20mm Plain	#1 Philips/Flat combo	Dia 4.5mm	8.4mm	84mm	84mm	83mm
HPISW220	2	20A	250V ac	AC23A	M160	IP66	2 x 25mm Plain	2 x 20mm Plain	#1 Philips/Flat combo	Dia 4.5mm	8.2mm	84mm	84mm	83mm
HPISW240	2	40A	250V ac	AC23A	M220	IP66	2 x 25mm Plain	2 x 20mm Plain	#1 Philips/Flat combo	Dia 6.4mm	8.2mm	84mm	84mm	83mm

Catalogue Number	Description
HPISW120	Isolator Switch Weatherproof IP66 20A 250V 1 Pole Small
HPISW220	Isolator Switch Weatherproof IP66 20A 250V 2 Pole Small
HPISW240	Isolator Switch Weatherproof IP66 40A 250V 2 Pole Small

When ordering BLACK product add "BK" at end of catalogue number, ie HPISW220BK

Certification Number:

HPISW120: GMA-507935
 HPISW220: GMA-514077-EA
 HPISW240: GMA-514076-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
 P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au

