

**OWPIR360RS
OWPIR360RSBK**

Cleaning Guide:

Spraying cleaning products on to electrical products is not recommended.

It is important to ensure that switches are turned off before cleaning.



Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic).

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.



Arctic Owl Infrared Motion Sensor Outdoor 360° Detection Recess or Surface Mount

- Sensor uses Passive Infrared Technology.
- Manual override.
- Comes with accessories to allow it to be fitted both as recessed mount where it clips into the hole in the ceiling or as surface mounting with a rear housing mounted to the ceiling surface.
- 360 degree detection with range of 8m radius at a height of 2.2m - 4m.
- "ON" time between 10 seconds and 30 minutes - between sensing trigger.
- Easy mounting and adjustment.
- Parallel connections with multiple fittings.
- Rated Load: 2000W Max and 1000W for fluoro energy saving lamps.
- SBL (LED): 400W
- 85mm cut out.
- Colours available: White & Black
- Depth into ceiling 20mm.
- IP44

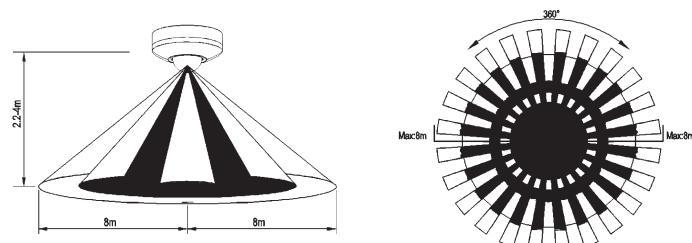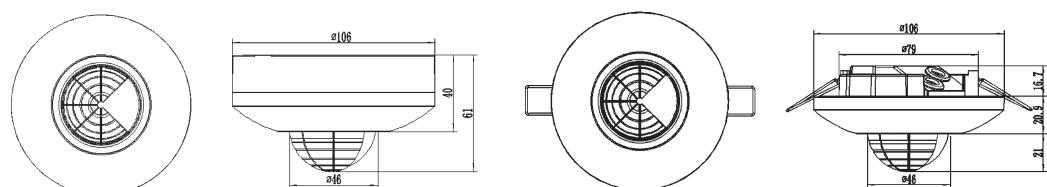

Catalogue Number	Description
OWPIR360RS	Motion Sensor Passive Infrared Outdoor IP44 360 Degrees 8 Metre Detection Mounting Recessed or Surface
OWPIR360RSBK	Motion Sensor Passive Infrared Outdoor IP44 360 Degrees 8 Metre Detection Mounting Recessed or Surface Black

Certification Number:
GMA-515322

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au

