

CHEMICAL RESISTANT WHITE FOR ACID APPLICATIONS

BUC310RW
BUC315RW
BUC320FRW
BUC320RW
BUC332RW
BUC410RW
BUC420RW
BUC432RW
BUC440RW
BUC450RW
BUC510RW
BUC520RW
BUC532RW
BUC540RW
BUC550RW

IP66 Combination Switched Sockets

Buffalo offers an extensive range of IP66 rated Combination Switched Sockets that are available in three-pin 10A to 32A, four-pin 10A to 50A and five-pin 10A to 50A designs.

Phase links are factory fitted between switches and sockets.

Small Single phase Flat pin - 10A to 20A

Size 1 Single & Three Phase - 10A- 20A

Size 2 Single & Three Phase - 32A - 50A

Heavy Duty terminals are standard on all products with Double Pole switching option as standard on 3 pin products.


The combination switch handle has two padlocking facilities (Oval Shape 11 x 9mm) so equipment can be safely isolated.

Switch is provided with LED fitment option (not supplied).

Combination sockets feature a clear dustproof & hoseproof flap allowing simple viewing of sockets. The flap is also provided with a reliable spring-tensioned latch to keep dust & liquids out.

- Recommended screw torque for corner cover screws 0.6Nm
- Recommended torque for Earth/Neutral fixed terminals 2Nm
- Recommended torque for Switch terminals 2.5Nm

Part bag contains twin screwed connector.

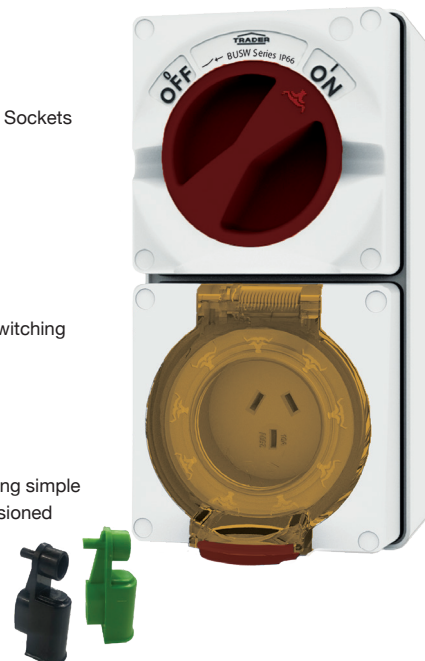

Chemical Resistant White for Acid Applications.

General Information

Pin & Volt	Cat No.	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	AC21 Rating (A)	AC23 Rating (A)	M Rating	Minimum Conductor Size (mm²)	Maximum Conductor Size (mm²)	Dimensions H* x W x D (mm)
3 Pin 250V~	BUC310RW	10	3 Flat	A	10	10	200	1.5	6	198x101x84
	BUC315RW	15	3 Flat	B	15	15	200	1.5	6	198x101x84
	BUC320FRW	20	3 Flat	E	20	20	200	2.5	16	198x101x84
	BUC320RW	20	3 Round	G	20	20	200	2.5	16	198x101x108
	BUC332RW	32	3 Round	H	32	20	200	6	16	198x101x108
4 Pin 500V~	BUC410RW	10	4 Round	I	10	10	200	6	16	198x101x108
	BUC420RW	20	4 Round	J	20	20	200	6	16	198x101x108
	BUC432RW	32	4 Round	K	32	20	200	6	16	198x101x108
	BUC440RW	40	4 Round	L	40	25	200	6	16	198x101x108
	BUC450RW	50	4 Round	M	50	25	200	6	16	198x101x108
5 Pin 500V~	BUC510RW	10	5 Round	N	10	10	200	2.5	6	198x101x108
	BUC520RW	20	5 Round	O	20	20	200	2.5	6	198x101x108
	BUC532RW	32	5 Round	P	32	20	200	6	16	198x101x108
	BUC540RW	40	5 Round	Q	40	25	200	6	16	198x101x108
	BUC550RW	50	5 Round	R	50	25	200	6	16	198x101x108

*Note: Height of product excludes conduit plugs

Certification Number:

BUC410RW, BUC420RW, BUC432RW, BUC440RW,
BUC450RW, BUC510RW, BUC520RW,
BUC532RW, BUC540RW, BUC550RW : GMA-520261
BUC310RW, BUC315RW, BUC320FRW: GMA-513502
BUC320RW, BUC332RW: GMA-520239

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067


P: 1300 301 838 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
May 2025


PAGE 1 of 2




BUC310RW
BUC315RW
BUC320FRW
BUC320RW
BUC332RW
BUC410RW
BUC420RW
BUC432RW
BUC440RW
BUC450RW
BUC510RW
BUC520RW
BUC532RW
BUC540RW
BUC550RW

Combination Switched Sockets Dimensional Drawings


Flat Pin Models

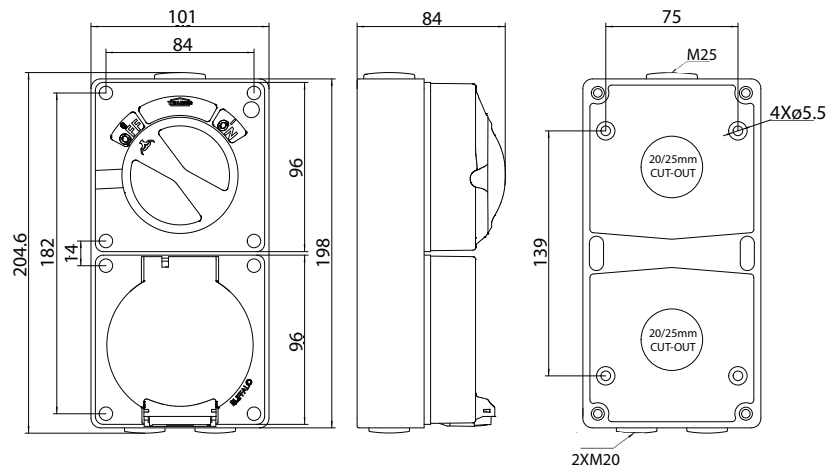

Round Pin Models

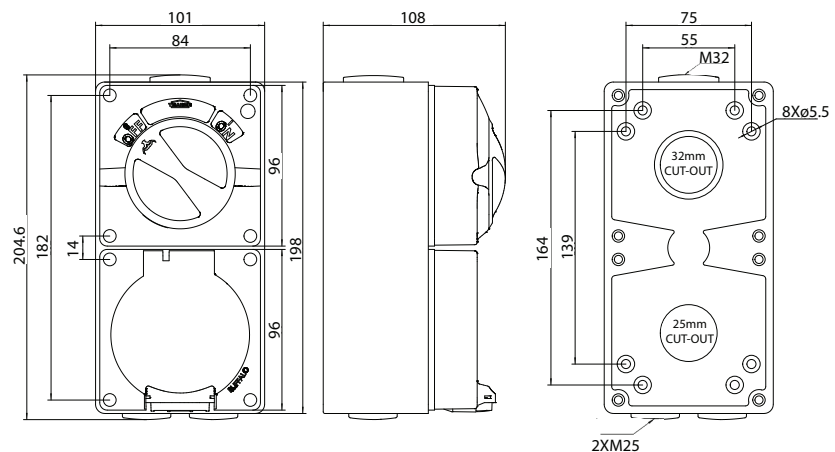

PAGE 2 of 2



Small Single Phase
Flat pin
10A to 20A



Size 1
Single/Three Phase
10A - 20A



Size 2
Single/Three Phase
32A - 50A

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
November 2024