

Product Code Cross Reference

OLD CODE	NEW CODE
Straight Plug	
	BUP310
	BUP310L
	BUP310RP
	BUP315
	BUP320F
	BUP320
	BUP332
BUP410OR	BUP410
BUP420OR	BUP420
BUP432OR	BUP432
	BUP440
	BUP450
BUP510OR	BUP510
BUP520OR	BUP520
BUP532OR	BUP532
	BUP540
BUP550OR	BUP550
Angled Plug	
	BUPA320
	BUPA332
BUPA410OR	BUPA410
BUPA420OR	BUPA420
BUPA432OR	BUPA432
	BUPA440
	BUPA450
BUPA510OR	BUPA510
BUPA520OR	BUPA520
BUPA532OR	BUPA532
	BUPA540
PAGE 1 of 2	BUPA550

IP66 Straight & Angled Plugs

- Small Single Phase 10A to 20A (250V~)
- Size 1 Single & Three Phase 10A to 20A (250V~ to 500V~)
- Size 2 Single & Three Phase 32A to 50A (250V~ to 500V~)
- 3 Flat Pin, 3 Round Pin, 4 Round Pin, 5 Round Pin.
- 10A, 15A, 20A, 32A, 40A & 50A current ratings.
- Straight body format providing a more traditional design.
- Angled format when space is limited, or to reduce plug & cable protrusion as cable is angled downwards.
- Ribbed Lock ring for secure fitment & gripping with gloved hands.
- Rear cord entry and cable gland ensuring IP66 rating.
- Insulated pins in accordance to AS/NZS3112 (BUP310, BUP310L, BUP315, BUP320F).
- Internal cable clamp to support electrical connections.
- Size 1 Single and Three Phase suits Smaller to Medium Loads.
- Size 2 Single and Three Phase suits Medium to Large loads.
- Small Extension Sockets 10A and 20A accept cables from ø 6 - 12mm
- Size 1 Extension Sockets 10A and 20A accept cables from ø 12 - 18mm
- Size 2 Extension Sockets 32A, 40A and 50A accept cables from ø 11 - 25mm



Pin & Volt	Cat No. Straight Plug	Cat No. Angle Plug	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size (mm dia)	Maximum Conductor Size (mm ²)	Minimum Cable Diameter (mm ²)	Maximum Cable Diameter (mm ²)	Gland Nut Thread (mm)	Matching Socket/Combination
3 Pin 250V~	BUP310	N/A	10	3 Flat	A	3.0	1.5HD	6	12	M20 x 1.5	BUSO310/BUC310
	BUP310L	N/A	10	2 Flat 1 Round	C	3.0	1.5HD	6	12	M20 x 1.5	BUSO310L/BUC310L
	BUP310RP	N/A	10	3 Round	F	3.0	1.5HD	6	12	M20 x 1.5	BUSO310RP
	BUP315	N/A	15	3 Flat	B	3.0	1.5HD	6	12	M20 x 1.5	BUSO315/BUC315
	BUP320F	N/A	20	3 Flat	E	3.0	1.5HD	6	12	M20 x 1.5	BUSO320F/BUC320F
	BUP320	BUPA320	20	3 Round	G	4.1	10	12	18	M25 x 1.5	BUSO320/BUC320
4 Pin 500V~	BUP332	BUPA332	32	3 Round	H	4.1	10	11	25	PG29	BUSO332/BUC332
	BUP410	BUPA410	10	4 Round	I	4.1	10	12	18	M25 x 1.5	BUSO410/BUC410
	BUP420	BUPA420	20	4 Round	J	4.1	10	12	18	M25 x 1.5	BUSO420/BUC420
	BUP432	BUPA432	32	4 Round	K	4.1	10	11	25	PG29	BUSO432/BUC432
	BUP440	BUPA440	40	4 Round	L	4.1	10	11	25	M32 x 1.5	BUSO440/BUC440
	BUP450	BUPA450	50	4 Round	M	4.1	10	11	25	M32 x 1.5	BUSO450/BUC450
5 Pin 500V~	BUP510	BUPA510	10	5 Round	N	4.1	10	12	18	M25 x 1.5	BUSO510/BUC510
	BUP520	BUPA520	20	5 Round	O	4.1	10	12	18	M25 x 1.5	BUSO520/BUC520
	BUP532	BUPA532	32	5 Round	P	4.1	10	11	25	PG29	BUSO532/BUC532
	BUP540	BUPA540	40	5 Round	Q	4.1	10	11	25	M32 x 1.5	BUSO540/BUC540
	BUP550	BUPA550	50	5 Round	R	4.1	10	11	25	M32 x 1.5	BUSO550/BUC550

Tables include NEW product codes. Please refer to Old & New Cross Reference Chart for OLD product codes.

All products accept BUEXSO Extension Sockets, BUSO Socket Outlets and BUC Combination Switched Sockets.

Certification Number:

BUESXO332, BUESXO432, BUESXO440, BUESXO450, BUESXO532, BUESXO540, BUESXO550 SAA211331
BUP310, BUP315, BUP320F: SAA-211156-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au





Data Specification Sheet
July 2024





Product Code Cross Reference

OLD CODE	NEW CODE
Straight Plug	BUP310
	BUP310L
	BUP315
	BUP320F
	BUP320
	BUP332
BUP410OR	BUP410
BUP420OR	BUP420
BUP432OR	BUP432
	BUP440
	BUP450
BUP510OR	BUP510
BUP520OR	BUP520
BUP532OR	BUP532
	BUP540
BUP550OR	BUP550
Angled Plug	BUPA320
	BUPA332
BUPA410OR	BUPA410
BUPA420OR	BUPA420
BUPA432OR	BUPA432
	BUPA440
	BUPA450
BUPA510OR	BUPA510
BUPA520OR	BUPA520
BUPA532OR	BUPA532
	BUPA540
	BUPA550








PAGE 2 of 2

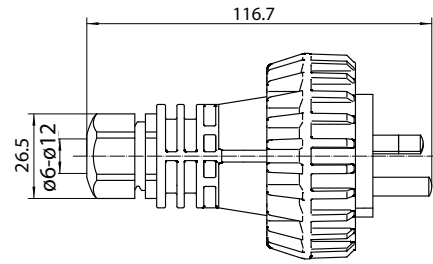

Small Single Phase

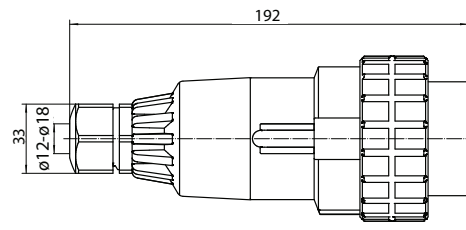

Size 1 Single &
Three Phase

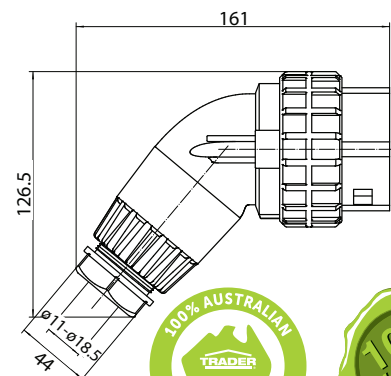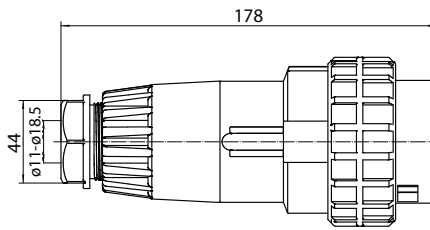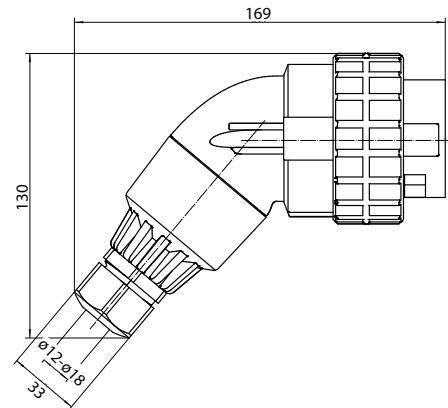

Size 2 Single &
Three Phase

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au
www.gsm.com.au



Data Specification Sheet
August 2021