

BUSB13


PAGE 1 of 2

Switchboard 13 Module IP66

- 13 module Enclosure with removable DIN rail assembly.
- Horizontal mount.
- Rated to 100A.
- Earth and neutral link bars provided.
- Includes 6 Module PVC back box with additional top & bottom conduit entries.
- DIN & Link Bar Cradle Assembly can be removed to aid installation of DIN equipment & cabling.
- Back Box has 8 x Ø 25mm & 5 x Ø 32mm conduit entries and 2 x 40mm, 2 x 32mm & 2 x 25mm Ø rear cut-outs.
- Polycarbonate Cover for High Impact Strength.
- UV Resistant material.
- Good level of Chemical Resistance.
- Pole fillers provided to fill unused DIN space.
- Ambient Temperature capability from -25C to +75C.
- Grey colour.
- Installer tip: cover all mounting or cover screws with supplied screw caps & sealant, likewise all conduit entries should be tightened & sealed with sealant.
- Fix cover screws to maximum torque levels of 0.53Nm
- IK07 impact resistant
- Compliant to AS/NZS 61439.3



Description	Cat No.	Poles	Rating	Dimensions L x W x D (mm)	Conduit Entries
Switchboard 13 Module IP66	BUSB13	13	100A	303 x 206 x 130.5	8 x Ø 25mm 5 x Ø 32mm

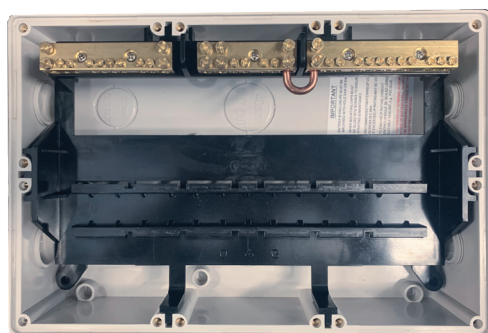

BUSB13 Internal view (less cover)



Certification Numbers:
GMA-517229


GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
September 2024

BUSB13

PAGE 2 of 2

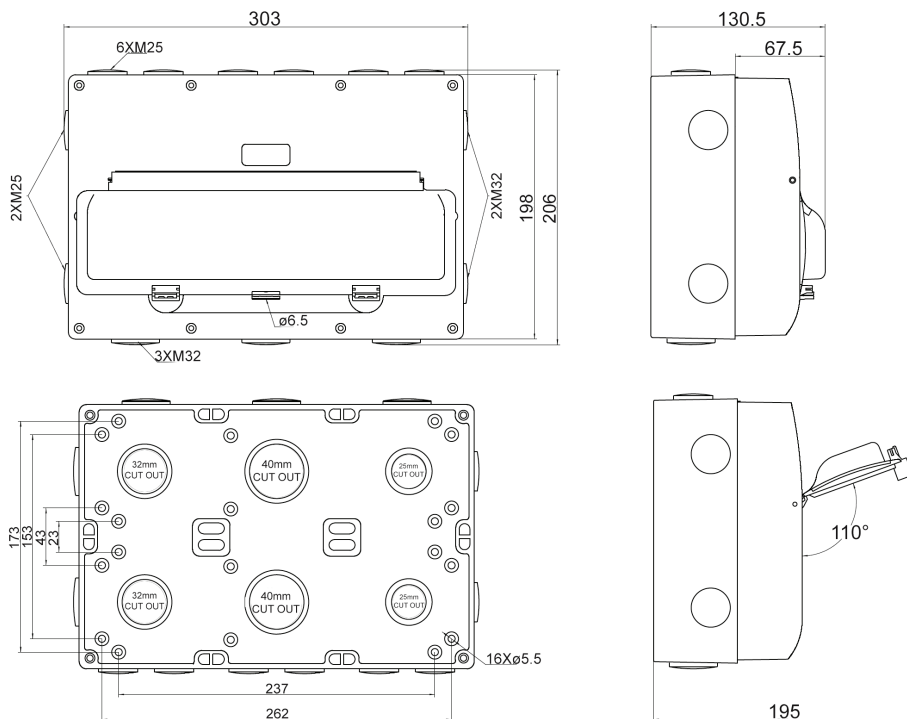


LINK BAR TERMINAL HOLE DIMENSIONS

EARTH – 2 x Ø8mm, 8 x Ø5mm

NEUTRAL SHORT - 3 x Ø8mm, 4 x Ø5mm

NEUTRAL LONG - 2 x Ø8mm, 11 x Ø5mm

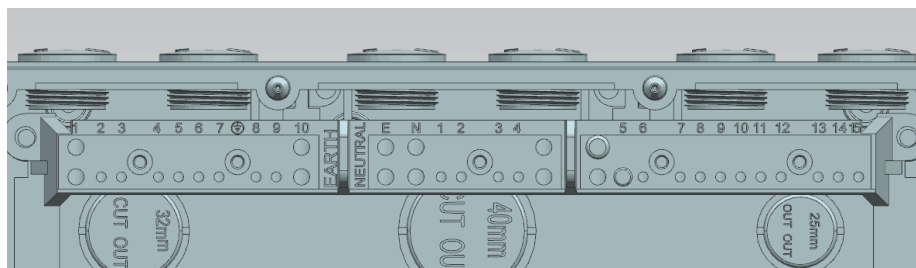

Certification Numbers:
GMA-517229

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@g sme.com.au
www.g sme.com.au



Data Specification Sheet
January 2024