

BUSOAU310
BUSOAU315

BUSOAU310LE
BUSOAU315LE

IP66 Sockets Auto Switched

Buffalo IP66 Auto-Switched Sockets as the name suggests can operate without the need for separate isolating switches. Available in 10A or 15A flat pin format compliant to AS/NZS3112.

They are robust and easy to use, and have a one piece spring-loaded transparent flap with self-latching design to seal out dust and moisture when not in use, ensuring an IP66 rating.

Flap's spring-loaded pin is centrally assembled eliminating the need to insert external cover caps. Flap opens up to 180° enabling easy insertion & removal of plugs.

Threaded socket surround will accept Plug lock rings to ensure IP66 rating & secure fitment.


Shutter operates from either earth or neutral.

Auto-Switched Sockets are double pole switched.



| Pin & Volt | Cat No. | Current Rating (A) | Pin Config | Pin Config Code (Table 1) | Enclosure | Minimum Conductor Size (mm ²) | Maximum Conductor Size (mm ²) | Buffalo Matching Plug |
|-------------|-----------|--------------------|------------|---------------------------|-----------|---|---|-----------------------|
| 3 Pin 250V~ | BUSOAU310 | 10 | 3 Flat | A | BUBB1G | 1.5 | 6 | BUP310 |
| | BUSOAU315 | 15 | 3 Flat | B | BUBB1G | 1.5 | 6 | BUP315 |

When ordering LESS ENCLOSURE add "LE" at end of catalogue number, ie "BUSOAU310LE"

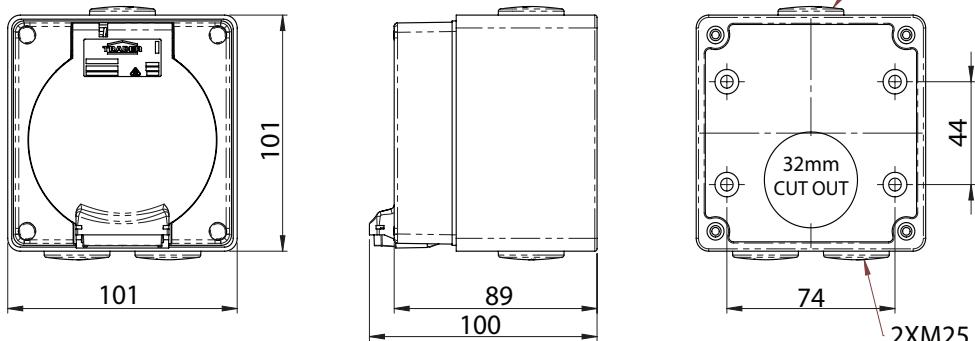

Certification Number:
SAA-212016-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gmse.com.au
www.gmse.com.au

